



(51) International Patent Classification:
B23C 5/20 (2006.01)

(21) International Application Number:
PCT/US2011/044431

(22) International Filing Date:
19 July 2011 (19.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/854,382 11 August 2010 (11.08.2010) US

(71) Applicant (for all designated States except US): **TDY INDUSTRIES, INC.** [US/US]; 1000 Six PPG Place, Pittsburgh, Pennsylvania 15222 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FANG, X. Daniel** [US/US]; 9507 Coronet Lane, Brentwood, Tennessee 37027 (US). **DUFOUR, Jean-Luc** [FR/US]; 103 Niblick Court, Franklin, Tennessee 37064 (US). **WILLS, David J.** [GB/US]; 1416 Chantilly Lane, Franklin, Tennessee 37067 (US).

(74) Agents: **VICCARO, Patrick J.** et al.; 1000 Six PPG Place, Pittsburgh, Pennsylvania 15222 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: **DOUBLE-SIDED CUTTING INSERTS FOR HIGH FEED MILLING**

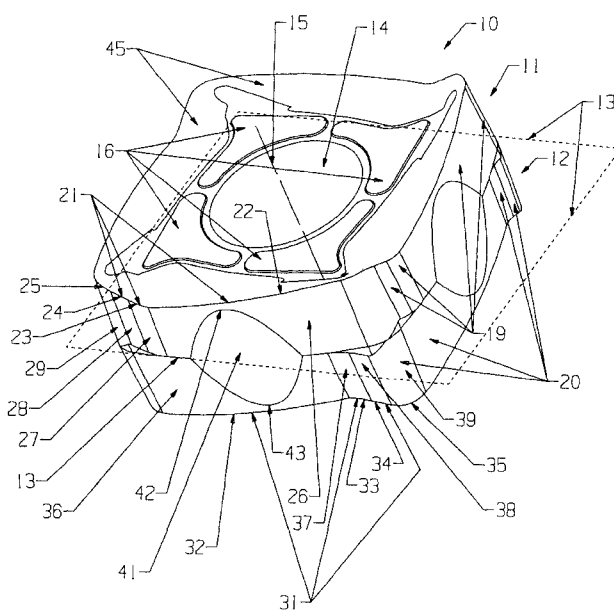


FIGURE 1

(57) Abstract: A double-sided cutting insert with a plurality of indexable convex cutting edges can have a top face and a bottom face, at least three convex cutting edges on each face connected by at least three nose corners, at least three peripheral side surfaces extending from each face toward a virtual middle plane; and a common lateral seating surface on each peripheral side surface. Each convex cutting edge can have at least a curved cutting edge region, and can further have a primary substantially straight cutting edge region intermediate the curved cutting edge region and the nose corner. Each peripheral side surface can further have a primary planar facet associated with the primary substantially straight cutting edge, and each face may also be single-handed in same direction. Additionally, in various embodiments, the top and bottom faces of the cutting insert may be formed such that they are twisted or rotated with respect to each other.



Published:

— *with international search report (Art. 21(3))*