20000497-2 IPOS-Ref.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04N 7/00, 7/50, G09G 1/16, H04N 7/52 — A1

(11) International Publication Number: WO 99/41908

(43) International Publication Date: 19 August 1999 (19.08.99)

(21) International Application Number: PCT/IB99/00288

(22) International Filing Date: 8 February 1999 (08.02.99)

(30) Priority Data:
98400367.3 16 February 1998 (16.02.98) EP

(71) Applicant *(for all designated States except US)*: CANAL+ SOCIETE ANONYME [FR/FR]; 85/89, quai André Citroën, F–75711 Paris Cedex 15 (FR).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: HAMERY, Dominique [FR/FR]; 3, Parc de la Bérengère, F–92210 Saint Cloud (FR).


(74) Agents: COZENS, Paul, Dennis et al.; Mathys & Squire, 100 Grays Inn Road, London WC1X 8AL (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

1 PD
1 appl n. (Look for symbols in address)
1 Inv. C change address, see 18/306)
IPC : H04N 7/00
IPER 5/8/99

(54) Title: PROCESSING OF DIGITAL PICTURE DATA IN A DECODER

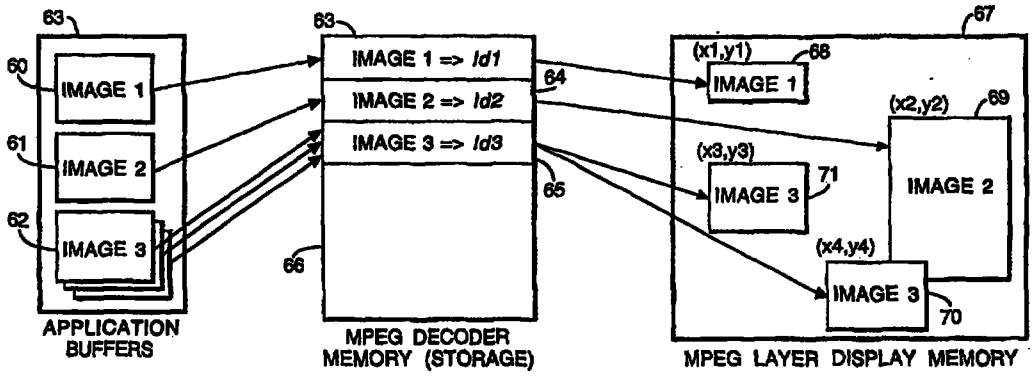

(57) Abstract

A decoder for a digital audiovisual transmission system, the decoder comprising a processor means for decompressing and displaying compressed still picture data and a memory (66, 67) characterised in that the memory (66, 67) comprises a storage memory (66) allocated to receive from the processor decompressed digital image data representing a plurality of still picture images (63, 64, 65) and at least one display memory (67) adapted to hold contemporaneously data representing multiple still picture images (68, 69, 70, 71) readable by the processor means prior to display, data representing the plurality of images being copied from the storage memory (66) to the display memory (67) for subsequent display.