

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 December 2000 (07.12.2000)

PCT

(10) International Publication Number  
WO 00/72669 A1

(51) International Patent Classification<sup>7</sup>: A01K 61/00

(21) International Application Number: PCT/NO00/00184

(22) International Filing Date: 30 May 2000 (30.05.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
1999 2614 31 May 1999 (31.05.1999) NO

(71) Applicant (for all designated States except US): HELGE-  
LAND HOLDING AS [NO/NO]; Postboks 64, N-8601  
Mo I Rana (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KOLBERG, Dag  
[NO/NO]; Ånesveien 22, N-8616 Båsmoen (NO).

(74) Agent: ABC-PATENT, SIVILING. ROLF CHR. B.  
LARSEN A.S.; Brynsveien 5, N-0667 Oslo (NO).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,  
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,  
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,  
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: INNER VALVES FOR FISH CAGE

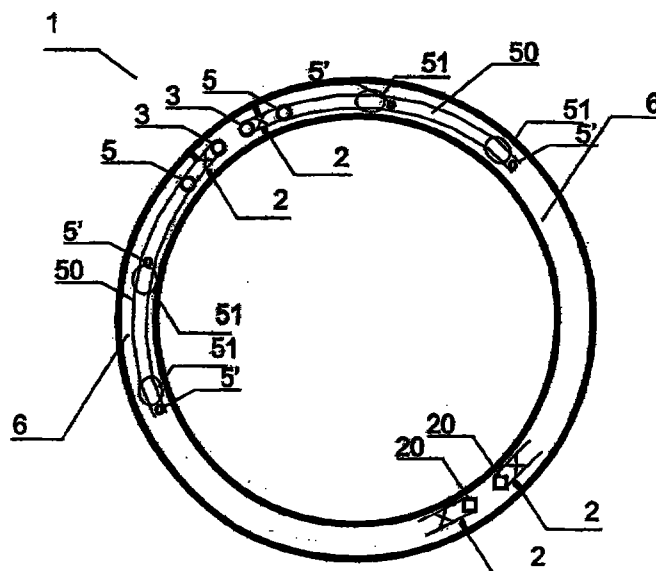

(57) Abstract: A fish cage having one or more air-tight buoyancy rings (1) being entirely or partially hollow, with water valves (20) for inlet and outlet of water, and air valves (3) for injection and outlet of air, and preferably with closing shot plates (2) in the buoyancy ring (1). The novel feature according to the invention is that at least one or more of the air valves (3), and preferably also the air valves (20) are arranged inside of the buoyancy ring (1) so that the air valves (3) and water valves (20) are protected from external mechanical influence.

WO 00/72669 A1