



(51) International Patent Classification:
B26B 21/40 (2006.01)

(21) International Application Number:
PCT/US2015/063079

(22) International Filing Date:
1 December 2015 (01.12.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/088,934 8 December 2014 (08.12.2014) US

(71) Applicant: **THE GILLETTE COMPANY** [US/US];
World Shaving Headquarters, IP/Legal Patent Department
- 3E, One Gillette Park, Boston, Massachusetts 02127
(US).

(72) Inventors: **EAGLETON, Christopher, Raymond**; 460
Basingstoke Road, Reading Berkshire RG2 0QE (GB).
HAWES, Christopher, Martin; Blackthorn, The Coombe,
Streatley-On-Thames, Reading Berkshire RG8 9QL (GB).

(74) Agents: **KREBS, Jay A.** et al.; c/o The Procter & Gamble
Company, Global Patent Services, One Procter & Gamble
Plaza, C8-229, Cincinnati, Ohio 45202 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: RAZOR CARTRIDGE GUARD STRUCTURE

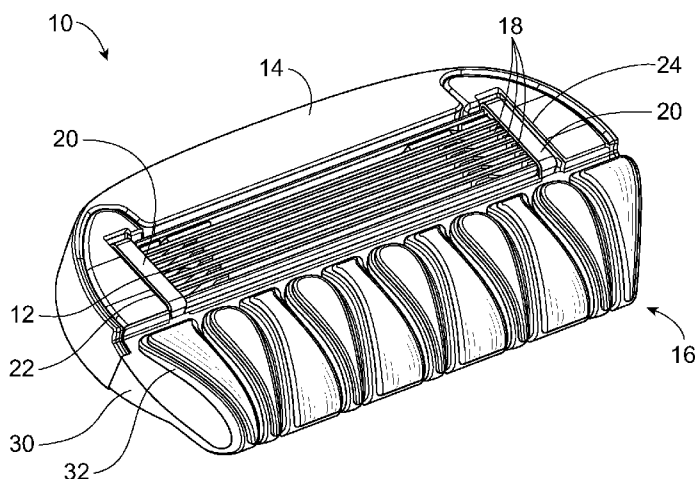


Fig. 1

(57) Abstract: A razor cartridge is provided comprising at least one blade having a cutting edge; a blade unit holding the at least one blade; and a guard positioned in front of the blade unit having a fixed end joined to the blade unit and a free end, with a pivot axis between the fixed end and the free end located distally away from the blade unit, wherein the free end pivots about said pivot axis.

