



(51) International Patent Classification:
E04C 2/54 (2006.01) *E04C 2/06* (2006.01)
B28B 23/00 (2006.01)

(74) Agents: APPOLONI, Romano et al.; Notarbartolo & Gervasi S.p.A., Corso di Porta Vittoria 9, I-20122 Milan (IT).

(21) International Application Number:
PCT/EP2011/059591

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
9 June 2011 (09.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2010A001046 10 June 2010 (10.06.2010) IT

(71) Applicant (for all designated States except US): ITAL-CEMENTI S.P.A. [IT/IT]; Via G. Camozzi, 124, I-24121Bergamo (IT).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CANGIANO, Stefano [IT/IT]; Via A. Moro 73, I-24060 Torre de Roveri (IT). CARMINATI, Aronne [IT/IT]; Via Europa 16, I-24030 Medolago (IT).

[Continued on next page]

(54) Title: COMPOSITE PANEL BASED ON CEMENTITIOUS MORTAR WITH PROPERTIES OF TRANSPARENCY

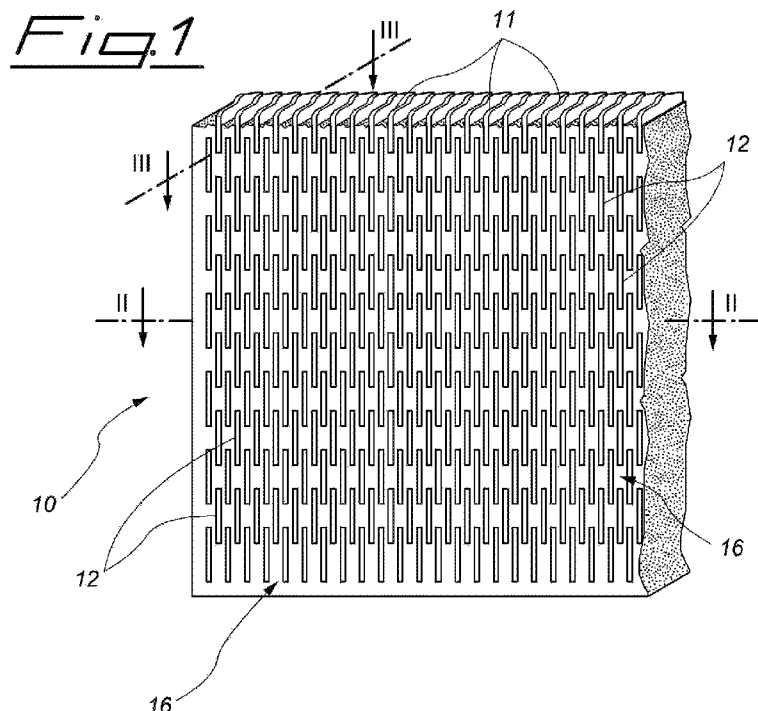

(57) Abstract: The present invention relates to a composite panel (10) based on cementitious mortar, passed through its entire thickness by a plurality of through openings (11), each of which is filled with a material transparent to light in the form of a preformed plate (12) housed in said opening (11), or formed in said opening, wherein said cement-based mortar contains at least 30 kg/m³ of fibres selected from one or more of the following types: metallic fibres, steel fibres, glass fibres, polymeric resin fibres. The invention also relates to methods of production of said panel.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*