

(51) International Patent Classification:
E21B 33/035 (2006.01)(21) International Application Number:
PCT/US2013/064610(22) International Filing Date:
11 October 2013 (11.10.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/659,380 24 October 2012 (24.10.2012) US

(71) Applicant: VETCO GRAY INC. [US/US]; 4424 West Sam Houston Pkwy North, Suite 100, Houston, TX 77041 (US).

(72) Inventors: YATES, Chad, Eric; 12221 N. Houston Rosslyn Road, P.O. Box 2291, Houston, TX 77086-3216 (US). POTTER, Philip, John; 12221 N. Houston Rosslyn Road, P.O. Box 2291, Houston, TX 77086-3216 (US).

(74) Agents: DOMBROWSKI, Joanna M. et al.; General Electric Company, Global Patent Operation, 2 Corporate Drive, Suite 648, Shelton, CT 06484 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: SUBSEA WELLHEAD STABILIZATION USING CYLINDRICAL SOCKETS

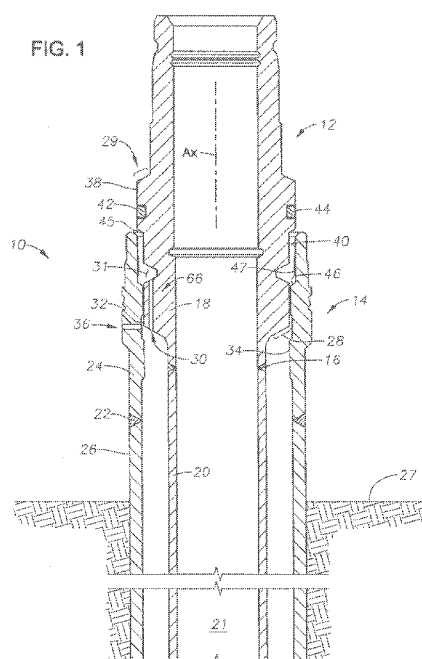

(57) Abstract: A wellhead assembly for use subsea includes a high pressure housing landed within a low pressure housing. The low pressure housing is an annular member that mounts into the sea floor and having an inner surface engaging the high pressure housing along a loading interface. Upper and lower sockets are formed along axially spaced apart portions of the outer surface of the high pressure housing. As the high pressure housing inserts into the low pressure housing, the high pressure housing sockets engage corresponding sockets formed along axially spaced apart sockets on portions of the inner surface of the low pressure housing. The sockets each have cylindrically shaped outer surfaces, and when engaged with one another define the loading interface. The sockets are strategically located on the upper and lower portions of the housings to maximize their distance apart.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*