

TITLE OF INVENTION

1-ETHOXY-1,1,2,2,3,3,4,4,4-NONAFLUOROBUTANE REFRIGERANT
COMPOSITIONS COMPRISING A HYDROCARBON AND USES
THEREOF

5

CROSS REFERENCE(S) TO RELATED APPLICATION(S)

This application claims the priority benefit of U.S. Provisional
Application 60/584,785, filed June 29, 2004.

10

BACKGROUND OF THE INVENTION

1. Field of the Invention.

The present invention relates to compositions for use in
refrigeration and air-conditioning systems comprising 1-ethoxy-
1,1,2,2,3,3,4,4,4-nonafluorobutane and at least one hydrocarbon. Further,
the present invention relates to compositions for use in refrigeration and
air-conditioning systems employing a centrifugal compressor comprising
1-ethoxy-1,1,2,2,3,3,4,4,4-nonafluorobutane and at least one hydrocarbon.
The compositions of the present invention may be azeotropic or near-
azeotropic and are useful in processes for producing cooling or heat or as
heat transfer fluids.

2. Description of Related Art.

The refrigeration industry has been working for the past few
decades to find replacement refrigerants for the ozone depleting
chlorofluorocarbons (CFCs) and hydrochlorofluorocarbons (HCFCs) being
phased out as a result of the Montreal Protocol. The solution for most
refrigerant producers has been the commercialization of
hydrofluorocarbon (HFC) refrigerants. The new HFC refrigerants, HFC-
134a being the most widely used at this time, have zero ozone depletion
potential and thus are not affected by the current regulatory phase out as
a result of the Montreal Protocol.

Further environmental regulations may ultimately cause global
phase out of certain HFC refrigerants. Currently, the automobile industry
is facing regulations relating to global warming potential for refrigerants
used in mobile air-conditioning. Therefore, there is a great current need
to identify new refrigerants with reduced global warming potential for the
automobile air-conditioning market. Should the regulations be more

broadly applied in the future, an even greater need will be felt for refrigerants that can be used in all areas of the refrigeration and air-conditioning industry.

Currently proposed replacement refrigerants for HFC-134a include HFC-152a, pure hydrocarbons such as butane or propane, or "natural" refrigerants such as CO₂ or ammonia. Many of these suggested replacements are toxic and/or flammable. Therefore, new alternatives are constantly being sought.

The object of the present invention is to provide novel refrigerant compositions and heat transfer fluids that provide unique characteristics to meet the demands of low or zero ozone depletion potential and lower global warming potential as compared to current refrigerants.

BRIEF SUMMARY OF THE INVENTION

The present invention relates to refrigerant or heat transfer fluid compositions comprising 1-ethoxy-1,1,2,2,3,3,4,4,4-nonafluorobutane (C₄F₉OC₂H₅) and at least one hydrocarbon selected from the group consisting of:

cyclohexane;
cyclopentane;
3-ethylpentane;
2,2-dimethylbutane;
2,3-dimethylbutane;
2,3-dimethylpentane;
n-heptane;
methylcyclopentane;
2-methylhexane;
3-methylhexane;
2-methylpentane;
3-methylpentane; and
n-pentane.

The present invention further relates to the above listed compositions specifically for use in refrigeration or air-conditioning systems employing a centrifugal compressor; a multi-stage or a 2-stage centrifugal compressor; or a single pass/single slab heat exchanger.

The present invention further relates to azeotropic or near-azeotropic compositions. These compositions are useful in refrigeration or air-conditioning systems. The compositions are also useful in refrigeration or air-conditioning systems employing a centrifugal compressor.

- 5 The present invention further relates to processes for producing cooling, heat, and transfer of heat from a heat source to a heat sink using the present inventive compositions.

DETAILED DESCRIPTION OF THE INVENTION

- 10 The refrigerant and heat transfer fluid compositions of the present invention comprise $C_4F_9OC_2H_5$ and at least one hydrocarbon.

- The hydrocarbons of the present invention comprise compounds containing hydrogen and carbon. Such hydrocarbons may be straight chain, branched chain or cyclic compounds and have from about 5
15 to 10 carbon atoms. Preferred hydrocarbons have from 5 to 7 carbon atoms. Representative hydrocarbons of the present invention are listed in Table 1.

Representative compounds that may be components of the compositions of the present invention are listed in Table 1.

20

TABLE 1

Compound	Chemical Formula	Chemical Name	CAS Reg. No.
$C_4F_9OC_2H_5$ (mixture of isomers)	$CF_3CF_2CF_2CF_2OC_2H_5$	1-ethoxy-1,1,2,2,3,3,4,4,4-nonafluorobutane	163702-05-4
	$(CF_3)_2CFCF_2OC_2H_5$	2-(ethoxydifluoromethyl)-1,1,1,2,2,3,3,3-heptafluoropropane	163702-06-5
	$CH_3CH_2C(CH_3)_3$	2,2-dimethylbutane	75-83-2
	$CH_3CH(CH_3)CH(CH_3)CH_3$	2,3-dimethylbutane	79-29-8
	$CH_3CH(CH_3)CH(CH_3)CH_2CH_3$	2,3-dimethylpentane	565-59-3
	$CH_3CH(CH_3)CH_2CH_3$	2-methylbutane	78-78-4
	$CH_3CH(CH_3)CH_2CH_2CH_2CH_3$	2-methylhexane	591-76-4
	$CH_3CH_2CH(CH_3)CH_2CH_2CH_3$	3-methylhexane	589-34-4
	$CH_3CH(CH_3)CH_2CH_2CH_3$	2-methylpentane	107-83-5
	$CH_3CH_2CH(CH_2CH_3)CH_2CH_3$	3-ethylpentane	617-78-7
	$CH_3CH_2CH(CH_3)CH_2CH_3$	3-methylpentane	96-14-0
	cyclo- $CH_2CH_2CH_2CH_2CH_2CH_2CH_2$ -	cyclohexane	110-82-7
	cyclo- $CH_2CH_2CH_2CH_2CH_2CH_2$ -	cyclopentane	287-92-3
	$CH_3CH_2CH_2CH_2CH_2CH_2CH_3$	n-heptane	142-82-5
	cyclo- $CH_2CH(CH_3)CH_2CH_2CH_2$ -	methylcyclopentane	96-37-7
	$CH_3CH_2CH_2CH_2CH_3$	n-pentane	109-66-0
	$CH_3CH_2CH_2CH_2CH_2CH_3$	n-hexane	110-54-3

The compounds listed in Table 1 are available commercially or may be prepared by processes known in the art or as described below. $C_4F_9OC_2H_5$ may be a mixture of isomers as indicated in Table 1 and is available commercially from 3MTM (St. Paul, Minnesota).

5 The compositions of the present invention that are mixtures may be prepared by any convenient method to combine the desired amounts of the individual components. A preferred method is to weigh the desired component amounts and thereafter combine the components in an appropriate vessel. Agitation may be used, if desired.

10 Compositions of the present invention have no ozone depletion potential and low global warming potential. For example, $C_4F_9OC_2H_5$, alone or in mixtures with hydrocarbons, will have global warming potentials lower than many HFC refrigerants currently in use.

15 The refrigerant or heat transfer compositions of the present invention include compositions comprising $C_4F_9OC_2H_5$ and at least one hydrocarbon selected from the group consisting of:

 cyclohexane;
 cyclopentane;
 3-ethylpentane;
20 2,2-dimethylbutane;
 2,3-dimethylbutane;
 2,3-dimethylpentane;
 n-heptane;
 methylcyclopentane;
25 2-methylhexane;
 3-methylhexane;
 2-methylpentane;
 3-methylpentane; and
 n-pentane.

30 The refrigerant or heat transfer compositions of the present invention may be azeotropic or near-azeotropic compositions. An azeotropic composition is a liquid admixture of two or more substances that has a constant boiling point that may be above or below the boiling
35 points of the individual components. As such an azeotropic composition will not fractionate within the refrigeration or air-conditioning system during operation, which may reduce efficiency of the system. Additionally, an

azeotropic composition will not fractionate upon leakage from the refrigeration or air-conditioning system. In the situation where one component of a mixture is flammable, fractionation during leakage could lead to a flammable composition either within the system or outside of the system.

A near-azeotropic composition, also sometimes called a "azeotropic-like composition," is a substantially constant boiling liquid admixture of two or more substances that behaves essentially as a single substance. One way to characterize a near-azeotropic composition is that the vapor produced by partial evaporation or distillation of the liquid has substantially the same composition as the liquid from which it was evaporated or distilled, that is, the admixture distills/refluxes without substantial composition change. Another way to characterize a near-azeotropic composition is that the bubble point vapor pressure and the dew point vapor pressure of the composition at a particular temperature are substantially the same. Herein, a composition is near-azeotropic if, after 50 weight percent of the composition is removed, such as by evaporation or boiling off, the difference in vapor pressure between the original composition and the composition remaining after 50 weight percent of the original composition has been removed is less than about 10 percent.

The azeotropic refrigerant compositions of the present invention are listed in Table 2.

TABLE 2

<u>Component A</u>	<u>Component B</u>	<u>Azeotrope Concentration</u>		<u>Azeotrope BP (°C)</u>
		<u>Wt% A</u>	<u>Wt% B</u>	
C ₄ F ₉ OC ₂ H ₅	cyclohexane	73.1	26.9	69.4
C ₄ F ₉ OC ₂ H ₅	cyclopentane	29.6	70.4	48.1
C ₄ F ₉ OC ₂ H ₅	2,2-dimethylbutane	32.6	67.4	48.1
C ₄ F ₉ OC ₂ H ₅	2,3-dimethylbutane	44.7	55.3	54.8
C ₄ F ₉ OC ₂ H ₅	2,3-dimethylpentane	82.2	17.8	72.2
C ₄ F ₉ OC ₂ H ₅	3-ethylpentane	86.0	14.0	73.5
C ₄ F ₉ OC ₂ H ₅	n-heptane	91.0	9.0	74.9
C ₄ F ₉ OC ₂ H ₅	methylcyclopentane	62.1	37.9	64.5
C ₄ F ₉ OC ₂ H ₅	2-methylhexane	81.8	18.2	72.1
C ₄ F ₉ OC ₂ H ₅	3-methylhexane	83.8	16.2	72.8
C ₄ F ₉ OC ₂ H ₅	2-methylpentane	47.9	52.1	56.5
C ₄ F ₉ OC ₂ H ₅	3-methylpentane	52.1	47.9	58.7
C ₄ F ₉ OC ₂ H ₅	n-pentane	9.2	90.8	35.0

The near-azeotropic refrigerant compositions and concentration ranges of the present invention are listed in Table 3.

5

TABLE 3**Near-azeotropic Concentration**

<u>Compounds (A/B)</u>	<u>Range</u> <u>wt% A/wt% B</u>
C ₄ F ₉ OC ₂ H ₅ /cyclohexane	39-99/61-1
C ₄ F ₉ OC ₂ H ₅ /cyclopentane	1-71/99-29
C ₄ F ₉ OC ₂ H ₅ /2,2-dimethylbutane	1-71/99-29
C ₄ F ₉ OC ₂ H ₅ /2,3-dimethylbutane	1-77/99-23
C ₄ F ₉ OC ₂ H ₅ /2,3-dimethylpentane	52-99/48-1
C ₄ F ₉ OC ₂ H ₅ /3-ethylpentane	56-99/44-1
C ₄ F ₉ OC ₂ H ₅ /n-heptane	61-99/39-1
C ₄ F ₉ OC ₂ H ₅ /methylcyclopentane	25-99/75-1
C ₄ F ₉ OC ₂ H ₅ /2-methylhexane	51-99/49-1
C ₄ F ₉ OC ₂ H ₅ /3-methylhexane	54-99/46-1
C ₄ F ₉ OC ₂ H ₅ /2-methylpentane	1-79/99-21
C ₄ F ₉ OC ₂ H ₅ /3-methylpentane	1-82/99-18
C ₄ F ₉ OC ₂ H ₅ /n-pentane	1-62/99-38

Additional compounds from the list in Table 1 may be added to the binary compositions of the present invention to form ternary or higher order compositions.

10

The compositions of the present invention may further comprise about 0.01 weight percent to about 5 weight percent of a stabilizer, free radical scavenger or antioxidant. Such additives include but are not limited to, nitromethane, hindered phenols, hydroxylamines, thiols, phosphites, or lactones. Single additives or combinations may be

15

used.

The compositions of the present invention may further comprise about 0.01 weight percent to about 5 weight percent of a water scavenger (drying compound). Such water scavengers may comprise ortho esters such as trimethyl-, triethyl-, or tripropylorthoformate.

20

The compositions of the present invention may further comprise an ultra-violet (UV) dye and optionally a solubilizing agent. The UV dye is a useful component for detecting leaks of the refrigerant and heat transfer fluid compositions by permitting one to observe the

fluorescence of the dye in the refrigerant or heat transfer fluid compositions at a leak point or in the vicinity of refrigeration or air-conditioning apparatus. One may observe the fluorescence of the dye under an ultra-violet light. Solubilizing agents may be needed to increase
5 solubility of such UV dyes in some refrigerants and heat transfer fluids.

By "ultra-violet" dye is meant a UV fluorescent composition that absorbs light in the ultra-violet or "near" ultra-violet region of the electromagnetic spectrum. The fluorescence produced by the UV fluorescent dye under illumination by a UV light that emits radiation with
10 wavelength anywhere from 10 nanometer to 750 nanometer may be detected. Therefore, if refrigerant or heat transfer fluid containing such a UV fluorescent dye is leaking from a given point in a refrigeration or air-conditioning apparatus, the fluorescence can be detected at the leak point. Such UV fluorescent dyes include but are not limited to naphthalimides,
15 perylenes, coumarins, anthracenes, phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, and derivatives or combinations thereof. Solubilizing agents of the present invention comprise at least one compound selected from the group consisting of hydrocarbons, hydrocarbon ethers, polyoxyalkylene glycol ethers, amides,
20 nitriles, ketones, chlorocarbons, esters, lactones, aryl ethers, fluoroethers and 1,1,1-trifluoroalkanes.

Hydrocarbon solubilizing agents of the present invention comprise hydrocarbons including straight chained, branched chain or cyclic alkanes or alkenes containing 16 or fewer carbon atoms and only
25 hydrogen with no other functional groups. Representative hydrocarbon solubilizing agents comprise propane, propylene, cyclopropane, n-butane, isobutane, n-pentane, octane, decane, and hexadecane. It should be noted that the hydrocarbon solubilizing agent may not be the same as the hydrocarbon component of the refrigerant or heat transfer fluid
30 composition.

Hydrocarbon ether solubilizing agents of the present invention comprise ethers containing only carbon, hydrogen and oxygen, such as dimethyl ether (DME).

Polyoxyalkylene glycol ether solubilizing agents of the present invention are represented by the formula $R^1[(OR^2)_xOR^3]_y$, wherein x is an integer from 1-3; y is an integer from 1-4; R^1 is selected from hydrogen and aliphatic hydrocarbon radicals having 1 to 6 carbon atoms and y bonding sites; R^2 is selected from aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms; R^3 is selected from hydrogen, and aliphatic and alicyclic hydrocarbon radicals having from 1 to 6 carbon atoms; at least one of R^1 and R^3 is selected from said hydrocarbon radical; and wherein said polyoxyalkylene glycol ethers have a molecular weight of from about 100 to about 300 atomic mass units. As used herein, bonding sites mean radical sites available to form covalent bonds with other radicals.

Hydrocarbylene radicals mean divalent hydrocarbon radicals.

In the present invention, preferable polyoxyalkylene glycol ether solubilizing agents are represented by $R^1[(OR^2)_xOR^3]_y$ wherein x is preferably 1-2; y is preferably 1; R^1 and R^3 are preferably independently selected from hydrogen and aliphatic hydrocarbon radicals having 1 to 4 carbon atoms; R^2 is preferably selected from aliphatic hydrocarbylene radicals having from 2 or 3 carbon atoms, most preferably 3 carbon atoms; the polyoxyalkylene glycol ether molecular weight is preferably from about 100 to about 250 atomic mass units, most preferably from about 125 to about 250 atomic mass units. The R^1 and R^3 hydrocarbon radicals having 1 to 6 carbon atoms may be linear, branched or cyclic. Representative R^1 and R^3 hydrocarbon radicals include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, and cyclohexyl. Where free hydroxyl radicals on the present polyoxyalkylene glycol ether solubilizing agents may be incompatible with certain compression refrigeration apparatus materials of construction (e.g. Mylar®), R^1 and R^3 are preferably aliphatic hydrocarbon radicals having 1 to 4 carbon atoms, most preferably 1 carbon atom. The R^2 aliphatic

hydrocarbylene radicals having from 2 to 4 carbon atoms form repeating oxyalkylene radicals - $(OR^2)_x$ - that include oxyethylene radicals, oxypropylene radicals, and oxybutylene radicals. The oxyalkylene radical comprising R^2 in one polyoxyalkylene glycol ether solubilizing agent molecule may be the same, or one molecule may contain different R^2 oxyalkylene groups. The present polyoxyalkylene glycol ether solubilizing agents preferably comprise at least one oxypropylene radical. Where R^1 is an aliphatic or alicyclic hydrocarbon radical having 1 to 6 carbon atoms and y bonding sites, the radical may be linear, branched or cyclic.

Representative R^1 aliphatic hydrocarbon radicals having two bonding sites include, for example, an ethylene radical, a propylene radical, a butylene radical, a pentylene radical, a hexylene radical, a cyclopentylene radical and a cyclohexylene radical. Representative R^1 aliphatic hydrocarbon radicals having three or four bonding sites include residues derived from polyalcohols, such as trimethylolpropane, glycerin, pentaerythritol, 1,2,3-trihydroxycyclohexane and 1,3,5-trihydroxycyclohexane, by removing their hydroxyl radicals.

Representative polyoxyalkylene glycol ether solubilizing agents include but are not limited to: $CH_3OCH_2CH(CH_3)O(H \text{ or } CH_3)$ (propylene glycol methyl (or dimethyl) ether), $CH_3O[CH_2CH(CH_3)O]_2(H \text{ or } CH_3)$ (dipropylene glycol methyl (or dimethyl) ether), $CH_3O[CH_2CH(CH_3)O]_3(H \text{ or } CH_3)$ (tripropylene glycol methyl (or dimethyl) ether), $C_2H_5OCH_2CH(CH_3)O(H \text{ or } C_2H_5)$ (propylene glycol ethyl (or diethyl) ether), $C_2H_5O[CH_2CH(CH_3)O]_2(H \text{ or } C_2H_5)$ (dipropylene glycol ethyl (or diethyl) ether), $C_2H_5O[CH_2CH(CH_3)O]_3(H \text{ or } C_2H_5)$ (tripropylene glycol ethyl (or diethyl) ether), $C_3H_7OCH_2CH(CH_3)O(H \text{ or } C_3H_7)$ (propylene glycol n-propyl (or di-n-propyl) ether), $C_3H_7O[CH_2CH(CH_3)O]_2(H \text{ or } C_3H_7)$ (dipropylene glycol n-propyl (or di-n-propyl) ether), $C_3H_7O[CH_2CH(CH_3)O]_3(H \text{ or } C_3H_7)$ (tripropylene glycol n-propyl (or di-n-propyl) ether), $C_4H_9OCH_2CH(CH_3)OH$ (propylene glycol n-butyl ether), $C_4H_9O[CH_2CH(CH_3)O]_2(H \text{ or } C_4H_9)$ (dipropylene glycol n-butyl (or di-n-butyl) ether), $C_4H_9O[CH_2CH(CH_3)O]_3(H \text{ or } C_4H_9)$ (tripropylene glycol n-butyl (or di-n-butyl) ether),

(CH₃)₃COCH₂CH(CH₃)OH (propylene glycol t-butyl ether),
 (CH₃)₃CO[CH₂CH(CH₃)O]₂(H or (CH₃)₃) (dipropylene glycol t-butyl (or di-t-butyl) ether), (CH₃)₃CO[CH₂CH(CH₃)O]₃(H or (CH₃)₃) (tripropylene glycol t-butyl (or di-t-butyl) ether), C₅H₁₁OCH₂CH(CH₃)OH (propylene glycol n-pentyl ether), C₄H₉OCH₂CH(C₂H₅)OH (butylene glycol n-butyl ether),
 5 C₄H₉O[CH₂CH(C₂H₅)O]₂H (dibutylene glycol n-butyl ether),
 trimethylolpropane tri-n-butyl ether (C₂H₅C(CH₂O(CH₂)₃CH₃)₃) and
 trimethylolpropane di-n-butyl ether (C₂H₅C(CH₂OC(CH₂)₃CH₃)₂CH₂OH).

Amide solubilizing agents of the present invention comprise
 10 those represented by the formulae R¹C(O)NR²R³ and cyclo-[R⁴C(O)N(R⁵)-], wherein R¹, R², R³ and R⁵ are independently selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms; R⁴ is selected from aliphatic hydrocarbylene radicals having from 3 to 12 carbon atoms; and wherein said amides have a molecular weight of from about
 15 100 to about 300 atomic mass units. The molecular weight of said amides is preferably from about 160 to about 250 atomic mass units. R¹, R², R³ and R⁵ may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R¹, R², R³ and R⁵
 20 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each
 25 carbon atoms in R¹⁻³, and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Preferred amide solubilizing agents consist of carbon, hydrogen, nitrogen and oxygen. Representative R¹, R², R³ and R⁵ aliphatic and alicyclic hydrocarbon radicals include
 30 methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers. A

preferred embodiment of amide solubilizing agents are those wherein R^4 in the aforementioned formula $\text{cyclo}[\text{R}^4\text{C}(\text{O})\text{N}(\text{R}^5)-]$ may be represented by the hydrocarbylene radical $(\text{CR}^6\text{R}^7)_n$, in other words, the formula $\text{cyclo}[(\text{CR}^6\text{R}^7)_n\text{C}(\text{O})\text{N}(\text{R}^5)-]$ wherein the previously-stated values for molecular weight apply; n is an integer from 3 to 5; R^5 is a saturated hydrocarbon radical containing 1 to 12 carbon atoms; R^6 and R^7 are independently selected (for each n) by the rules previously offered defining R^{1-3} . In the lactams represented by the formula: $\text{cyclo}[(\text{CR}^6\text{R}^7)_n\text{C}(\text{O})\text{N}(\text{R}^5)-]$, all R^6 and R^7 are preferably hydrogen, or contain a single saturated hydrocarbon radical among the n methylene units, and R^5 is a saturated hydrocarbon radical containing 3 to 12 carbon atoms. For example, 1-(saturated hydrocarbon radical)-5-methylpyrrolidin-2-ones.

Representative amide solubilizing agents include but are not limited to: 1-octylpyrrolidin-2-one, 1-decylpyrrolidin-2-one, 1-octyl-5-methylpyrrolidin-2-one, 1-butylcaprolactam, 1-cyclohexylpyrrolidin-2-one, 1-butyl-5-methylpiperid-2-one, 1-pentyl-5-methylpiperid-2-one, 1-hexylcaprolactam, 1-hexyl-5-methylpyrrolidin-2-one, 5-methyl-1-pentylpiperid-2-one, 1,3-dimethylpiperid-2-one, 1-methylcaprolactam, 1-butyl-pyrrolidin-2-one, 1,5-dimethylpiperid-2-one, 1-decyl-5-methylpyrrolidin-2-one, 1-dodecylpyrrolid-2-one, N,N-dibutylformamide and N,N-diisopropylacetamide.

Ketone solubilizing agents of the present invention comprise ketones represented by the formula $\text{R}^1\text{C}(\text{O})\text{R}^2$, wherein R^1 and R^2 are independently selected from aliphatic, alicyclic and aryl hydrocarbon radicals having from 1 to 12 carbon atoms, and wherein said ketones have a molecular weight of from about 70 to about 300 atomic mass units. R^1 and R^2 in said ketones are preferably independently selected from aliphatic and alicyclic hydrocarbon radicals having 1 to 9 carbon atoms. The molecular weight of said ketones is preferably from about 100 to 200 atomic mass units. R^1 and R^2 may together form a hydrocarbylene radical connected and forming a five, six, or seven-membered ring cyclic ketone, for example, cyclopentanone, cyclohexanone, and cycloheptanone. R^1

and R^2 may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 and R^2 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (keto-, oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each 10 carbon atoms in R^1 and R^2 , and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Representative R^1 and R^2 aliphatic, alicyclic and aryl hydrocarbon radicals in the general formula $R^1C(O)R^2$ include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers, as well as phenyl, benzyl, cumenyl, mesityl, tolyl, xylyl and phenethyl.

Representative ketone solubilizing agents include but are not limited to: 2-butanone, 2-pentanone, acetophenone, butyrophenone, hexanophenone, cyclohexanone, cycloheptanone, 2-heptanone, 3-heptanone, 5-methyl-2-hexanone, 2-octanone, 3-octanone, diisobutyl ketone, 4-ethylcyclohexanone, 2-nonanone, 5-nonanone, 2-decanone, 4-decanone, 2-decalone, 2-tridecanone, dihexyl ketone and dicyclohexyl ketone.

Nitrile solubilizing agents of the present invention comprise nitriles represented by the formula R^1CN , wherein R^1 is selected from aliphatic, alicyclic or aryl hydrocarbon radicals having from 5 to 12 carbon atoms, and wherein said nitriles have a molecular weight of from about 90 to about 200 atomic mass units. R^1 in said nitrile solubilizing agents is preferably selected from aliphatic and alicyclic hydrocarbon radicals having 8 to 10 carbon atoms. The molecular weight of said nitrile solubilizing agents is preferably from about 120 to about 140 atomic mass

units. R^1 may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals,
5 which contain the atoms nitrogen (aza-), oxygen (keto-, oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each 10 carbon atoms in R^1 , and the presence of any such non-hydrocarbon substituents and
10 heteroatoms must be considered in applying the aforementioned molecular weight limitations. Representative R^1 aliphatic, alicyclic and aryl hydrocarbon radicals in the general formula R^1CN include pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers, as well as
15 phenyl, benzyl, cumenyl, mesityl, tolyl, xylyl and phenethyl.

Representative nitrile solubilizing agents include but are not limited to: 1-cyanopentane, 2,2-dimethyl-4-cyanopentane, 1-cyanoheptane, 1-cyanoheptane, 1-cyanooctane, 2-cyanooctane, 1-cyanononane, 1-cyanodecane, 2-cyanodecane, 1-cyanoundecane and 1-cyanododecane.
20 Chlorocarbon solubilizing agents of the present invention comprise chlorocarbons represented by the formula RCI_x , wherein x is 1 or 2; R is selected from aliphatic and alicyclic hydrocarbon radicals having 1 to 12 carbon atoms; and wherein said chlorocarbons have a molecular weight of from about 100 to about 200 atomic mass units. The molecular
25 weight of said chlorocarbon solubilizing agents is preferably from about 120 to 150 atomic mass units. Representative R aliphatic and alicyclic hydrocarbon radicals in the general formula RCI_x include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl,
30 undecyl, dodecyl and their configurational isomers.

Representative chlorocarbon solubilizing agents include but are not limited to: 3-(chloromethyl)pentane, 3-chloro-3-methylpentane, 1-

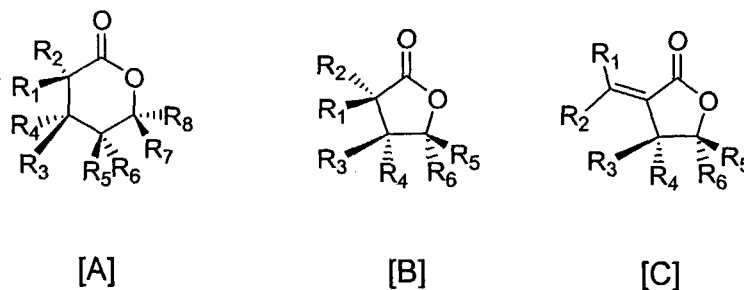
chlorohexane, 1,6-dichlorohexane, 1-chloroheptane, 1-chlorooctane, 1-chlorononane, 1-chlorodecane, and 1,1,1-trichlorodecane.

Ester solubilizing agents of the present invention comprise esters represented by the general formula $R^1C(O)OR^2$, wherein R^1 and R^2 are independently selected from linear and cyclic, saturated and unsaturated, alkyl and aryl radicals. Preferred esters consist essentially of the elements C, H and O, have a molecular weight of from about 80 to about 550 atomic mass units.

Representative esters include but are not limited to:

(CH₃)₂CHCH₂O(O)C(CH₂)₂₋₄(O)COCH₂CH(CH₃)₂ (diisobutyl dibasic ester), ethyl hexanoate, ethyl heptanoate, n-butyl propionate, n-propyl propionate, ethyl benzoate, di-n-propyl phthalate, benzoic acid ethoxyethyl ester, dipropyl carbonate, "Exxate 700" (a commercial C₇ alkyl acetate), "Exxate 800" (a commercial C₈ alkyl acetate), dibutyl phthalate, and tert-butyl acetate.

Lactone solubilizing agents of the present invention comprise lactones represented by structures [A], [B], and [C]:



These lactones contain the functional group $-C(O)O-$ in a ring of six (A), or preferably five atoms (B), wherein for structures [A] and [B], R_1 through R_8 are independently selected from hydrogen or linear, branched, cyclic, bicyclic, saturated and unsaturated hydrocarbyl radicals. Each R_1 through R_8 may be connected forming a ring with another R_1 through R_8 . The lactone may have an exocyclic alkylidene group as in structure [C], wherein R_1 through R_6 are independently selected from hydrogen or linear, branched, cyclic, bicyclic, saturated and unsaturated






hydrocarbonyl radicals. Each R_1 through R_6 may be connected forming a ring with another R_1 through R_6 . The lactone solubilizing agents have a molecular weight range of from about 80 to about 300 atomic mass units, preferred from about 80 to about 200 atomic mass units.

- 5 Representative lactone solubilizing agents include but are not limited to the compounds listed in Table 4.

TABLE 4

Additive	Molecular Structure	Molecular Formula	Molecular Weight (amu)
(E,Z)-3-ethylidene-5-methyl-dihydro-furan-2-one		$C_7H_{10}O_2$	126
(E,Z)-3-propylidene-5-methyl-dihydro-furan-2-one		$C_8H_{12}O_2$	140
(E,Z)-3-butylidene-5-methyl-dihydro-furan-2-one		$C_9H_{14}O_2$	154
(E,Z)-3-pentylidene-5-methyl-dihydro-furan-2-one		$C_{10}H_{16}O_2$	168
(E,Z)-3-Hexylidene-5-methyl-dihydro-furan-2-one		$C_{11}H_{18}O_2$	182
(E,Z)-3-Heptylidene-5-methyl-dihydro-furan-2-one		$C_{12}H_{20}O_2$	196
(E,Z)-3-octylidene-5-methyl-dihydro-furan-2-one		$C_{13}H_{22}O_2$	210
(E,Z)-3-nonylidene-5-methyl-dihydro-furan-2-one		$C_{14}H_{24}O_2$	224
(E,Z)-3-decylidene-5-methyl-dihydro-furan-2-one		$C_{15}H_{26}O_2$	238
(E,Z)-3-(3,5,5-trimethylhexylidene)-5-methyl-dihydrofuran-2-one		$C_{14}H_{24}O_2$	224
(E,Z)-3-cyclohexylmethylidene-5-methyl-dihydrofuran-2-one		$C_{12}H_{18}O_2$	194
gamma-octalactone		$C_8H_{14}O_2$	142
gamma-nonolactone		$C_9H_{16}O_2$	156
gamma-decalactone		$C_{10}H_{18}O_2$	170

<i>gamma</i> -undecalactone		$C_{11}H_{20}O_2$	184
<i>gamma</i> -dodecalactone		$C_{12}H_{22}O_2$	198
3-hexyldihydro-furan-2-one		$C_{10}H_{18}O_2$	170
3-heptyldihydro-furan-2-one		$C_{11}H_{20}O_2$	184
<i>cis</i> -3-ethyl-5-methyl-dihydro-furan-2-one		$C_7H_{12}O_2$	128
<i>cis</i> -(3-propyl-5-methyl)-dihydro-furan-2-one		$C_8H_{14}O_2$	142
<i>cis</i> -(3-butyl-5-methyl)-dihydro-furan-2-one		$C_9H_{16}O_2$	156
<i>cis</i> -(3-pentyl-5-methyl)-dihydro-furan-2-one		$C_{10}H_{18}O_2$	170
<i>cis</i> -3-hexyl-5-methyl-dihydro-furan-2-one		$C_{11}H_{20}O_2$	184
<i>cis</i> -3-heptyl-5-methyl-dihydro-furan-2-one		$C_{12}H_{22}O_2$	198
<i>cis</i> -3-octyl-5-methyl-dihydro-furan-2-one		$C_{13}H_{24}O_2$	212
<i>cis</i> -3-(3,5,5-trimethylhexyl)-5-methyl-dihydro-furan-2-one		$C_{14}H_{28}O_2$	226
<i>cis</i> -3-cyclohexylmethyl-5-methyl-dihydro-furan-2-one		$C_{12}H_{20}O_2$	196
5-methyl-5-hexyl-dihydro-furan-2-one		$C_{11}H_{20}O_2$	184
5-methyl-5-octyl-dihydro-furan-2-one		$C_{13}H_{24}O_2$	212

Hexahydro-isobenzofuran-1-one		$C_8H_{12}O_2$	140
<i>delta</i> -decalactone		$C_{10}H_{18}O_2$	170
<i>delta</i> -undecalactone		$C_{11}H_{20}O_2$	184
<i>delta</i> -dodecalactone		$C_{12}H_{22}O_2$	198
mixture of 4-hexyl-dihydrofuran-2-one and 3-hexyl-dihydro-furan-2-one		$C_{10}H_{18}O_2$	170

Lactone solubilizing agents generally have a kinematic viscosity of less than about 7 centistokes at 40°C. For instance, gamma-undecalactone has kinematic viscosity of 5.4 centistokes and cis-(3-hexyl-5-methyl)dihydrofuran-2-one has viscosity of 4.5 centistokes, both at 40°C. Lactone solubilizing agents may be available commercially or prepared by methods as described in U. S. patent application 10/910,495, filed August 3, 2004; incorporated herein by reference.

Aryl ether solubilizing agents of the present invention comprise aryl ethers represented by the formula R^1OR^2 , wherein: R^1 is selected from aryl hydrocarbon radicals having from 6 to 12 carbon atoms; R^2 is selected from aliphatic hydrocarbon radicals having from 1 to 4 carbon atoms; and wherein said aryl ethers have a molecular weight of from about 100 to about 150 atomic mass units. Representative R^1 aryl radicals in the general formula R^1OR^2 include phenyl, biphenyl, cumenyl, mesityl, tolyl, xylyl, naphthyl and pyridyl. Representative R^2 aliphatic hydrocarbon radicals in the general formula R^1OR^2 include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl and *tert*-butyl. Representative aromatic ether solubilizing agents include but are not limited to: methyl phenyl ether (anisole), 1,3-dimethoxybenzene, ethyl phenyl ether and butyl phenyl ether.

Fluoroether solubilizing agents of the present invention comprise those represented by the general formula $R^1OCF_2CF_2H$, wherein R^1 is selected from aliphatic, alicyclic, and aromatic hydrocarbon radicals having from about 5 to about 15 carbon atoms, preferably primary, linear, saturated, alkyl radicals. Representative fluoroether solubilizing agents include but are not limited to: $C_8H_{17}OCF_2CF_2H$ and $C_6H_{13}OCF_2CF_2H$. It should be noted that if the refrigerant is a fluoroether, then the solubilizing agent may not be the same fluoroether.

Fluoroether solubilizing agents may further comprise ethers derived from fluoro-olefins and polyols. The fluoro-olefins may be of the type $CF_2=CXY$, wherein X is hydrogen, chlorine or fluorine, and Y is chlorine, fluorine, CF_3 or OR_f , wherein R_f is CF_3 , C_2F_5 , or C_3F_7 . Representative fluoro-olefins are tetrafluoroethylene, chlorotrifluoroethylene, hexafluoropropylene, and perfluoromethylvinyl ether. The polyols may be linear or branched. Linear polyols may be of the type $HOCH_2(CHOH)_x(CRR')_yCH_2OH$, wherein R and R' are hydrogen, or CH_3 , or C_2H_5 and wherein x is an integer from 0-4, and y is an integer from 0-4. Branched polyols may be of the type $C(OH)_t(R)_u(CH_2OH)_v[(CH_2)_mCH_2OH]_w$, wherein R may be hydrogen, CH_3 or C_2H_5 , m may be an integer from 0 to 3, t and u may be 0 or 1, v and w are integers from 0 to 4, and also wherein $t + u + v + w = 4$. Representative polyols are trimethylol propane, pentaerythritol, butanediol, and ethylene glycol.

1,1,1-Trifluoroalkane solubilizing agents of the present invention comprise 1,1,1-trifluoroalkanes represented by the general formula CF_3R^1 , wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms, preferably primary, linear, saturated alkyl radicals. Representative 1,1,1-trifluoroalkane solubilizing agents include but are not limited to: 1,1,1-trifluorohexane and 1,1,1-trifluorododecane.

Solubilizing agents of the present invention may be present as a single compound, or may be present as a mixture of more than one

solubilizing agent. Mixtures of solubilizing agents may contain two solubilizing agents from the same class of compounds, say two lactones, or two solubilizing agents from two different classes, such as a lactone and a polyoxyalkylene glycol ether.

5 In the present compositions comprising refrigerant and UV fluorescent dye, or comprising heat transfer fluid and UV fluorescent dye, from about 0.001 weight percent to about 1.0 weight percent of the compositions is UV dye, preferably from about 0.005 weight percent to about 0.5 weight percent, and most preferably from 0.01 weight percent to
10 about 0.25 weight percent.

 Solubility of these UV fluorescent dyes in refrigerants and heat transfer fluids may be poor. Therefore, methods for introducing these dyes into the refrigeration or air-conditioning apparatus have been awkward, costly and time consuming. US patent no. RE 36,951 describes
15 a method, which utilizes a dye powder, solid pellet or slurry of dye that may be inserted into a component of the refrigeration or air-conditioning apparatus. As refrigerant and lubricant are circulated through the apparatus, the dye is dissolved or dispersed and carried throughout the apparatus. Numerous other methods for introducing dye into a
20 refrigeration or air-conditioning apparatus are described in the literature.

 Ideally, the UV fluorescent dye could be dissolved in the refrigerant itself thereby not requiring any specialized method for introduction to the refrigeration or air-conditioning apparatus. The present invention relates to compositions including UV fluorescent dye, which may
25 be introduced into the system in the refrigerant. The inventive compositions will allow the storage and transport of dye-containing refrigerant and heat transfer fluid even at low temperatures while maintaining the dye in solution.

 In the present compositions comprising refrigerant, UV
30 fluorescent dye and solubilizing agent, or comprising heat transfer fluid, UV fluorescent dye and solubilizing agent, from about 1 to about 50 weight percent, preferably from about 2 to about 25 weight percent, and most

preferably from about 5 to about 15 weight percent of the combined composition is solubilizing agent in the refrigerant or heat transfer fluid. In the compositions of the present invention the UV fluorescent dye is present in a concentration from about 0.001 weight percent to about 1.0 weight percent in the refrigerant or heat transfer fluid, preferably from 0.005 weight percent to about 0.5 weight percent, and most preferably from 0.01 weight percent to about 0.25 weight percent.

Optionally, commonly used refrigeration or air-conditioning system additives may be added, as desired, to compositions of the present invention in order to enhance performance and system stability. These additives are known in the field of refrigeration and air-cinditioning, and include, but are not limited to, anti wear agents, extreme pressure lubricants, corrosion and oxidation inhibitors, metal surface deactivators, free radical scavengers, and foam control agents. In general, these additives are present in the inventive compositions in small amounts relative to the overall composition. Typically concentrations of from less than about 0.1 weight percent to as much as about 3 weight percent of each additive are used. These additives are selected on the basis of the individual system requirements. These additives include members of the triaryl phosphate family of EP (extreme pressure) lubricity additives, such as butylated triphenyl phosphates (BTPP), or other alkylated triaryl phosphate esters, e.g. Syn-0-Ad 8478 from Akzo Chemicals, tricresyl phosphates and related compounds. Additionally, the metal dialkyl dithiophosphates (e.g. zinc dialkyl dithiophosphate (or ZDDP), Lubrizol 1375 and other members of this family of chemicals may be used in compositions of the present invention. Other antiwear additives include natural product oils and asymmetrical polyhydroxyl lubrication additives, such as Synergol TMS (International Lubricants). Similarly, stabilizers such as anti oxidants, free radical scavengers, and water scavengers may be employed. Compounds in this category can include, but are not limited to, butylated hydroxy toluene (BHT) and epoxides.

Solubilizing agents such as ketones may have an objectionable odor, which can be masked by addition of an odor masking agent or fragrance. Typical examples of odor masking agents or fragrances may include Evergreen, Fresh Lemon, Cherry, Cinnamon, Peppermint, Floral
5 or Orange Peel, all commercially available, as well as d-limonene and pinene. Such odor masking agents may be used at concentrations of from about 0.001% to as much as about 15% by weight based on the combined weight of odor masking agent and solubilizing agent.

The present invention further relates to a method of using the
10 refrigerant or heat transfer fluid compositions further comprising ultraviolet fluorescent dye, and optionally, solubilizing agent, in refrigeration or air-conditioning apparatus. The method comprises introducing the refrigerant or heat transfer fluid composition into the refrigeration or air-conditioning apparatus. This may be done by dissolving the UV fluorescent dye in the
15 refrigerant or heat transfer fluid composition in the presence of a solubilizing agent and introducing the combination into the apparatus. Alternatively, this may be done by combining solubilizing agent and UV fluorescent dye and introducing said combination into refrigeration or air-conditioning apparatus containing refrigerant and/or heat transfer fluid.
20 The resulting composition may be used in the refrigeration or air-conditioning apparatus.

The present invention further relates to a method of using the refrigerant or heat transfer fluid compositions comprising ultraviolet fluorescent dye to detect leaks. The presence of the dye in the
25 compositions allows for detection of leaking refrigerant in the refrigeration or air-conditioning apparatus. Leak detection helps to address, resolve or prevent inefficient operation of the apparatus or system or equipment failure. Leak detection also helps one contain chemicals used in the operation of the apparatus.

30 The method comprises providing the composition comprising refrigerant and ultra-violet fluorescent dye, or comprising heat transfer fluid and ultra-violet fluorescent dye as described herein, and optionally, a solubilizing agent as described herein, to refrigeration and air-conditioning apparatus and employing a suitable means for detecting the UV
35 fluorescent dye-containing refrigerant. Suitable means for detecting the dye include, but are not limited to, ultra-violet lamp, often referred to as a "black light" or "blue light". Such ultra-violet lamps are commercially

available from numerous sources specifically designed for this purpose. Once the ultra-violet fluorescent dye containing composition has been introduced to the refrigeration or air-conditioning apparatus and has been allowed to circulate throughout the system, a leak can be found by shining
5 said ultra-violet lamp on the apparatus and observing the fluorescence of the dye in the vicinity of any leak point.

The present invention further relates to a method of using the compositions of the present invention for producing cooling or heat, wherein the method comprises producing cooling by evaporating said
10 composition in the vicinity of a body to be cooled and thereafter condensing said composition; or producing heat by condensing said composition in the vicinity of the body to be heated and thereafter evaporating said composition. Where the composition of the present invention includes refrigerant or heat transfer fluid composition with an
15 ultra-violet fluorescent dye, and/or a solubilizing agent, the refrigerant or heat transfer fluid component of the composition is evaporated and thereafter condensed to produce cooling, or condensed and thereafter evaporated to produce heat.

Mechanical refrigeration is primarily an application of
20 thermodynamics wherein a cooling medium, such as a refrigerant, goes through a cycle so that it can be recovered for reuse. Commonly used cycles include vapor-compression, absorption, steam-jet or steam-ejector, and air.

Vapor-compression refrigeration systems include an
25 evaporator, a compressor, a condenser, and an expansion device. A vapor-compression cycle re-uses refrigerant in multiple steps producing a cooling effect in one step and a heating effect in a different step. The cycle can be described simply as follows. Liquid refrigerant enters an evaporator through an expansion device, and the liquid refrigerant boils in
30 the evaporator at a low temperature to form a gas and produce cooling. The low-pressure gas enters a compressor where the gas is compressed to raise its pressure and temperature. The higher-pressure (compressed) gaseous refrigerant then enters the condenser in which the refrigerant condenses and discharges its heat to the environment. The refrigerant
35 returns to the expansion device through which the liquid expands from the

higher-pressure level in the condenser to the low-pressure level in the evaporator, thus repeating the cycle.

5 The present invention further relates to a process for producing cooling comprising evaporating the compositions of the present invention in the vicinity of a body to be cooled, and thereafter condensing said compositions.

10 The present invention further relates to a process for producing heat comprising condensing the compositions of the present invention in the vicinity of a body to be heated, and thereafter evaporating said compositions.

There are various types of compressors that may be used in refrigeration applications. Compressors can be generally classified as reciprocating, rotary, jet, centrifugal, scroll, screw or axial-flow, depending on the mechanical means to compress the fluid, or as positive-
15 displacement (e.g., reciprocating, scroll or screw) or dynamic (e.g., centrifugal or jet), depending on how the mechanical elements act on the fluid to be compressed.
be compressed.

20 Either positive displacement or dynamic compressors may be used in the present inventive process. A centrifugal type compressor is the preferred equipment for the present refrigerant compositions.

A centrifugal compressor uses rotating elements to accelerate the refrigerant radially, and typically includes an impeller and diffuser housed in a casing. Centrifugal compressors usually take fluid in at an
25 impeller eye, or central inlet of a circulating impeller, and accelerate it radially outward. Some static pressure rise occurs in the impeller, but most of the pressure rise occurs in the diffuser section of the casing, where velocity is converted to static pressure. Each impeller-diffuser set is a stage of the compressor. Centrifugal compressors are built with from 1
30 to 12 or more stages, depending on the final pressure desired and the volume of refrigerant to be handled.

The pressure ratio, or compression ratio, of a compressor is the ratio of absolute discharge pressure to the absolute inlet pressure.

Pressure delivered by a centrifugal compressor is practically constant over a relatively wide range of capacities.

Positive displacement compressors draw vapor into a chamber, and the chamber decreases in volume to compress the vapor. After being
5 compressed, the vapor is forced from the chamber by further decreasing the volume of the chamber to zero or nearly zero. A positive displacement compressor can build up a pressure, which is limited only by the volumetric efficiency and the strength of the parts to withstand the pressure.

10 Unlike a positive displacement compressor, a centrifugal compressor depends entirely on the centrifugal force of the high-speed impeller to compress the vapor passing through the impeller. There is no positive displacement, but rather what is called dynamic-compression.

The pressure a centrifugal compressor can develop depends
15 on the tip speed of the impeller. Tip speed is the speed of the impeller measured at its tip and is related to the diameter of the impeller and its revolutions per minute. The capacity of the centrifugal compressor is determined by the size of the passages through the impeller. This makes the size of the compressor more dependent on the pressure required than
20 the capacity.

Because of its high-speed operation, a centrifugal compressor is fundamentally a high volume, low-pressure machine. A centrifugal compressor works best with a low-pressure refrigerant, such as trichlorofluoromethane (CFC-11) or 1,2,2-trichlorotrifluoroethane (CFC-
25 113).

Large centrifugal compressors typically operate at 3000 to 7000 revolutions per minute (rpm). Small turbine centrifugal compressors are designed for high speeds, from about 40,000 to about 70,000 (rpm), and have small impeller sizes, typically less than 0.15 meters (about 6
30 inches).

A multi-stage impeller may be used in a centrifugal compressor to improve compressor efficiency thus requiring less power in use. For a

two-stage system, in operation, the discharge of the first stage impeller goes to the suction intake of a second impeller. Both impellers may operate by use of a single shaft (or axle). Each stage can build up a compression ratio of about 4 to 1; that is, the absolute discharge pressure can be four times the absolute suction pressure. Several examples of two-stage centrifugal compressor systems, particularly for automotive applications, are described in US 5,065,990 and US 5,363,674, both incorporated herein by reference.

The compositions of the present invention suitable for use in a refrigeration or air-conditioning systems employing a centrifugal compressor comprise $C_4F_9OC_2H_5$ and at least one hydrocarbon selected from the group consisting of:

cyclohexane;
cyclopentane;
3-ethylpentane;
2,2-dimethylbutane;
2,3-dimethylbutane;
2,3-dimethylpentane;
n-heptane;
methylcyclopentane;
2-methylhexane;
3-methylhexane;
2-methylpentane;
3-methylpentane; and
n-pentane.

These above-listed compositions are also suitable for use in a multi-stage centrifugal compressor, preferably a two-stage centrifugal compressor apparatus.

The compositions of the present invention may be used in stationary air-conditioning, heat pumps or mobile air-conditioning and refrigeration systems. Stationary air-conditioning and heat pump applications include window, ductless, ducted, packaged terminal, chillers and commercial, including packaged rooftop. Refrigeration applications include domestic or home refrigerators and freezers, ice machines, self-contained coolers and freezers, walk-in coolers and freezers and transport refrigeration systems.

The compositions of the present invention may additionally be used in air-conditioning, heating and refrigeration systems that employ fin and tube heat exchangers, microchannel heat exchangers and vertical or horizontal single pass tube or plate type heat exchangers.

5 Conventional microchannel heat exchangers may not be ideal for the low pressure refrigerant compositions of the present invention. The low operating pressure and density result in high flow velocities and high frictional losses in all components. In these cases, the evaporator design may be modified. Rather than several microchannel slabs connected in
10 series (with respect to the refrigerant path) a single slab/single pass heat exchanger arrangement may be used. Therefore, a preferred heat exchanger for the low pressure refrigerants of the present invention is a single slab/single pass heat exchanger.

 In addition to two-stage or other multi-stage centrifugal
15 compressor apparatus, compositions of the present invention suitable for use in refrigeration or air-conditioning apparatus employing a single slab/single pass heat exchanger comprise $C_4F_9OC_2H_5$ and at least one hydrocarbon selected from the group consisting of:

 cyclohexane;
20 cyclopentane;
 3-ethylpentane;
 2,2-dimethylbutane;
 2,3-dimethylbutane;
 2,3-dimethylpentane;
25 n-heptane;
 methylcyclopentane;
 2-methylhexane;
 3-methylhexane;
 2-methylpentane;
30 3-methylpentane; and
 n-pentane.

 The compositions of the present invention are particularly useful in small turbine centrifugal compressors (mini-centrifugal compressors), which can be used in auto and window air-conditioning,
35 heat pumps, or transport refrigeration, as well as other applications. These high efficiency mini-centrifugal compressors may be driven by an electric motor and can therefore be operated independently of the engine

speed. A constant compressor speed allows the system to provide a relatively constant cooling capacity at all engine speeds. This provides an opportunity for efficiency improvements especially at higher engine speeds as compared to a conventional R-134a automobile air-conditioning system. When the cycling operation of conventional systems at high driving speeds is taken into account, the advantage of these low pressure systems becomes even greater.

Alternatively, rather than use electrical power, the mini-centrifugal compressor may be powered by an engine exhaust gas driven turbine or a ratioed gear drive assembly with ratioed belt drive. The electrical power available in current automobile design is about 14 volts, but the new mini-centrifugal compressor requires electrical power of about 50 volts. Therefore, use of an alternative power source would be advantageous. A refrigeration or air-conditioning apparatus powered by an engine exhaust gas driven turbine is described in detail in U.S. provisional patent application no. 60/658,915, filed March 4, 2005, incorporated herein by reference. A refrigeration or air-conditioning apparatus powered by a ratioed gear drive assembly is described in detail in U.S. provisional patent application no. 60/663924, filed March 21, 2005, incorporated herein by reference.

The present invention further relates to a process to produce cooling comprising compressing a composition of the present invention, in a mini-centrifugal compressor powered by an engine exhaust gas driven turbine; condensing said composition; and thereafter evaporating said composition in the vicinity of a body to be cooled.

The present invention further relates to a process to produce cooling comprising compressing a composition of the present invention, in a mini-centrifugal compressor powered by a ratioed gear drive assembly with a ratioed belt drive; condensing said composition; and thereafter evaporating said composition in the vicinity of a body to be cooled.

Some of the low pressure refrigerant fluids of the present invention may be suitable as drop-in replacements for CFC-113 in existing centrifugal equipment.

The present invention further relates to a method for replacing CFC-113 in existing refrigeration apparatus or air-conditioning apparatus, said method comprising providing a composition of the present invention as the replacement.

The present invention further relates to a process for transfer of heat from a heat source to a heat sink wherein the compositions of the present invention serve as heat transfer fluids. Said process for heat transfer comprises transferring the compositions of the present invention
5 from a heat source to a heat sink.

Heat transfer fluids are utilized to transfer, move or remove heat from one space, location, object or body to a different space, location, object or body by radiation, conduction, or convection. A heat transfer fluid may function as a secondary coolant by providing means of transfer
10 for cooling (or heating) from a remote refrigeration (or heating) system. In some systems, the heat transfer fluid may remain in a constant state throughout the transfer process (i.e., not evaporate or condense). Alternatively, evaporative cooling processes may utilize heat transfer fluids as well.

15 A heat source may be defined as any space, location, object or body from which it is desirable to transfer, move or remove heat. Examples of heat sources may be spaces (open or enclosed) requiring refrigeration or cooling, such as refrigerator or freezer cases in a supermarket, building spaces requiring air-conditioning, or the passenger
20 compartment of an automobile requiring air-conditioning. A heat sink may be defined as any space, location, object or body capable of absorbing heat. A vapor compression refrigeration system is one example of such a heat sink.

25

EXAMPLES**EXAMPLE 1****Impact of Vapor Leakage**

- 5 A vessel is charged with an initial composition at a specified temperature, and the initial vapor pressure of the composition is measured. The composition is allowed to leak from the vessel, while the temperature is held constant, until 50 weight percent of the initial composition is removed, at which time the vapor pressure of the composition remaining in the vessel is measured. The results are
- 10 summarized in Table 5 below.

TABLE 5

<u>Compounds</u> <u>wt% A/ wt% B</u>	<u>Initial</u> <u>Psia</u>	<u>Initial</u> <u>kPa</u>	<u>After 50%</u> <u>Leak</u> <u>Psia</u>	<u>After 50%</u> <u>Leak</u> <u>kPa</u>	<u>Delta</u> <u>P %</u>
C₄F₉OC₂H₅/cyclohexane (69.4 °C)					
73.1/26.9	14.68	101.22	14.68	101.22	0.0%
90/10	14.03	96.73	13.66	94.18	2.6%
99/1	12.21	84.19	12.04	83.01	1.4%
100/0	11.85	81.70	11.85	81.70	0.0%
60/40	14.54	100.25	14.38	99.15	1.1%
39/61	13.99	96.46	12.67	87.36	9.4%
38/62	13.96	96.25	12.53	86.39	10.2%
0/100	10.47	72.19	10.47	72.19	0.0%
C₄F₉OC₂H₅/cyclopentane (48.1 °C)					
29.6/70.4	14.71	101.42	14.71	101.42	0.0%
10/90	14.52	100.11	14.39	99.22	0.9%
1/99	14.20	97.91	14.16	97.63	0.3%
0/100	14.14	97.49	14.14	97.49	0.0%
60/40	14.30	98.60	13.73	94.67	4.0%
70/30	13.81	95.22	12.54	86.46	9.2%
71/29	13.74	94.73	12.38	85.36	9.9%
100/0	5.57	38.40	5.57	38.40	0.0%
C₄F₉OC₂H₅/2,2-dimethylbutane (48.1 °C)					
32.6/67.4	14.67	101.15	14.67	101.15	0.0%
20/80	14.59	100.60	14.52	100.11	0.5%
10/90	14.38	99.15	14.23	98.11	1.0%
1/99	14.00	96.53	13.96	96.25	0.3%
0/100	13.94	96.11	13.94	96.11	0.0%
60/40	14.32	98.73	13.82	95.29	3.5%
71/29	13.83	95.36	12.46	85.91	9.9%

72/28	13.76	94.87	12.27	84.60	10.8%
100/0	5.57	38.40	5.57	38.40	0.0%

C₄F₉OC₂H₅/2,3-dimethylbutane (54.8 °C)

44.7/55.3	14.72	101.49	14.72	101.49	0.0%
20/80	14.40	99.29	14.04	96.80	2.5%
10/90	13.99	96.46	13.57	93.56	3.0%
1/99	13.37	92.18	13.30	91.70	0.5%
0/100	13.28	91.56	13.28	91.56	0.0%
60/40	14.59	100.60	14.41	99.35	1.2%
77/23	13.88	95.70	12.59	86.81	9.3%
78/22	13.79	95.08	12.38	85.36	10.2%
100/0	7.14	49.23	7.14	49.23	0.0%

C₄F₉OC₂H₅/2,3-dimethylpentane (72.2 °C)

82.2/17.8	14.68	101.22	14.68	101.22	0.0%
90/10	14.51	100.04	14.39	99.22	0.8%
99/1	13.28	91.56	13.16	90.74	0.9%
100/0	13.00	89.63	13.00	89.63	0.0%
60/40	14.19	97.84	13.56	93.49	4.4%
52/48	13.90	95.84	12.59	86.81	9.4%
51/49	13.86	95.56	12.43	85.70	10.3%
0/100	8.50	58.61	8.50	58.61	0.0%

C₄F₉OC₂H₅/3-ethylpentane (73.5 °C)

86.0/14.0	14.69	101.28	14.69	101.28	0.0%
95/5	14.36	99.01	14.23	98.11	0.9%
99/1	13.78	95.01	13.71	94.53	0.5%
100/0	13.56	93.49	13.56	93.49	0.0%
60/40	13.96	96.25	13.03	89.84	6.7%
56/44	13.80	95.15	12.49	86.12	9.5%
55/45	13.76	94.87	12.33	85.01	10.4%
0/100	7.86	54.19	7.86	54.19	0.0%

C₄F₉OC₂H₅/n-heptane (74.9 °C)

91.0/9.0	14.72	101.49	14.72	101.49	0.0%
99/1	13.00	89.63	12.97	89.43	0.2%
100/0	14.19	97.84	14.19	97.84	0.0%
60/40	13.57	93.56	12.13	83.63	10.6%
61/39	13.61	93.84	12.29	84.74	9.7%
0/100	6.97	48.06	6.97	48.06	0.0%

C₄F₉OC₂H₅/methylcyclopentane (64.5 °C)

62.1/37.9	14.71	101.42	14.71	101.42	0.0%
80/20	14.31	98.66	13.89	95.77	2.9%
90/10	13.25	91.36	12.20	84.12	7.9%
95/5	12.09	83.36	11.05	76.19	8.6%
99/1	10.56	72.81	10.22	70.46	3.2%

100/0	10.05	69.29	10.05	69.29	0.0%
40/60	14.45	99.63	14.01	96.60	3.0%
25/75	14.00	96.53	12.60	86.87	10.0%
24/76	13.96	96.25	12.51	86.25	10.4%
0/100	11.67	80.46	11.67	80.46	0.0%

C₄F₉OC₂H₅/2-methylhexane (72.1 °C)

81.8/18.2	14.70	101.35	14.70	101.35	0.0%
90/10	14.51	100.04	14.38	99.15	0.9%
99/1	13.25	91.36	13.12	90.46	1.0%
100/0	12.95	89.29	12.95	89.29	0.0%
60/40	14.23	98.11	13.61	93.84	4.4%
51/49	13.90	95.84	12.51	86.25	10.0%
50/50	13.86	95.56	12.35	85.15	10.9%
0/100	8.57	59.09	8.57	59.09	0.0%

C₄F₉OC₂H₅/3-methylhexane (72.8 °C)

83.8/16.2	14.71	101.42	14.71	101.42	0.0%
90/10	14.60	100.66	14.52	100.11	0.5%
99/1	13.52	93.22	13.42	92.53	0.7%
100/0	13.25	91.36	13.25	91.36	0.0%
60/40	14.14	97.49	13.38	92.25	5.4%
54/46	13.91	95.91	12.62	87.01	9.3%
53/47	13.87	95.63	12.47	85.98	10.1%
100/0	8.26	56.95	8.26	56.95	0.0%

C₄F₉OC₂H₅/2-methylpentane (56.5 °C)

47.9/52.1	14.67	101.15	14.67	101.15	0.0%
60/40	14.59	100.60	14.48	99.84	0.8%
79/21	13.79	95.08	12.52	86.32	9.2%
80/20	13.70	94.46	12.31	84.87	10.1%
100/0	7.59	52.33	7.59	52.33	0.0%
20/80	14.26	98.32	13.78	95.01	3.4%
10/90	13.80	95.15	13.30	91.70	3.6%
1/99	13.11	90.39	13.03	89.84	0.6%
0/100	13.01	89.70	13.01	89.70	0.0%

C₄F₉OC₂H₅/3-methylpentane (58.7 °C)

52.1/47.9	14.68	101.22	14.68	101.22	0.0%
80/20	13.89	95.77	12.81	88.32	7.8%
82/18	13.70	94.46	12.41	85.56	9.4%
83/17	13.59	93.70	12.19	84.05	10.3%
100/0	8.21	56.61	8.21	56.61	0.0%
40/60	14.60	100.66	14.50	99.97	0.7%
20/80	14.12	97.35	13.45	92.74	4.7%
10/90	13.59	93.70	12.95	89.29	4.7%
1/99	12.81	88.32	12.71	87.63	0.8%
0/100	12.69	87.50	12.69	87.50	0.0%

C₄F₉OC₂H₅/n-pentane (35.0 °C)

9.2/90.8	14.71	101.42	14.71	101.42	0.0%
1/99	14.67	101.15	14.67	101.15	0.0%
0/100	14.66	101.08	14.66	101.08	0.0%
40/60	14.39	99.22	14.11	97.29	1.9%
60/40	13.78	95.01	12.59	86.81	8.6%
62/38	13.68	94.32	12.32	84.94	9.9%
63/37	13.63	93.98	12.17	83.91	10.7%
100/0	3.33	22.96	3.33	22.96	0.0%

EXAMPLE 2**Tip Speed to Develop Pressure**

Tip speed can be estimated by making some fundamental relationships for refrigeration equipment that use centrifugal compressors.

- 5 The torque an impeller ideally imparts to a gas is defined as

$$T = m(v_2 r_2 - v_1 r_1) \quad \text{Equation 1}$$

where

T = torque, Newton-meters

- 10 m = mass rate of flow, kg/sec

v₂ = tangential velocity of refrigerant leaving impeller (tip speed),
meters/sec

r₂ = radius of exit impeller, meters

v₁ = tangential velocity of refrigerant entering impeller, meters/sec

- 15 r₁ = radius of inlet of impeller, meters

Assuming the refrigerant enters the impeller in an essentially axial direction, the tangential component of the velocity v₁ = 0, therefore

20
$$T = m v_2 r_2 \quad \text{Equation 2}$$

The power required at the shaft is the product of the torque and the rotative speed

$$P = T \omega \quad \text{Equation 3}$$

- 25 where

P = power, W

ω = angular velocity, radians/s

therefore,

$$P = T \cdot \omega = m \cdot v_2 \cdot r_2 \cdot \omega \quad \text{Equation 4}$$

5

At low refrigerant flow rates, the tip speed of the impeller and the tangential velocity of the refrigerant are nearly identical; therefore

$$r_2 \cdot \omega = v_2 \quad \text{Equation 5}$$

10 and

$$P = m \cdot v_2 \cdot v_2 \quad \text{Equation 6}$$

Another expression for ideal power is the product of the mass rate of flow and the isentropic work of compression,

15

$$P = m \cdot H_i \cdot (1000 \text{ J/kJ}) \quad \text{Equation 7}$$

where

H_i = Difference in enthalpy of the refrigerant from a saturated vapor at the evaporating conditions to saturated condensing conditions,

20 kJ/kg.

Combining the two expressions Equation 6 and 7 produces,

$$v_2 \cdot v_2 = 1000 \cdot H_i \quad \text{Equation 8}$$

25 Although Equation 8 is based on some fundamental assumptions, it provides a good estimate of the tip speed of the impeller and provides an important way to compare tip speeds of refrigerants.

The table below shows theoretical tip speeds that are calculated for 1,2,2-trichlorotrifluoroethane (CFC-113) and 3-ethylpentane
30 of the present invention. The conditions assumed for this comparison are:

Evaporator temperature 40.0°F (4.4°C)

Condenser temperature 110.0°F (43.3°C)
 Liquid subcool temperature 10.0°F (5.5°C)
 Return gas temperature 75.0°F (23.8°C)
 Compressor efficiency is 70%

5

These are typical conditions under which small turbine centrifugal compressors perform.

TABLE 6

Refrigerant Composition	Wt% C ₄ F ₉ OC ₂ H ₅	Wt% B	Hi Btu/lb	Hi*0.7 Btu/lb	Hi*0.7 KJ/Kg	V2 m/s	V2 rel to CFC-113
CFC-113			10.92	7.6	17.8	133.3	na
C₄F₉OC₂H₅ plus B:							
cyclohexane	73.1	26.9	17.69	12.4	28.8	169.7	127%
2,3-dimethylpentane	82.2	17.8	16.35	11.4	26.6	163.2	122%
3-ethylpentane	86.0	14.0	15.91	11.1	25.9	160.9	121%
n-heptane	91.0	9.0	15.31	10.7	24.9	157.9	118%
methylcyclopentane	62.1	37.9	19.01	13.3	31.0	175.9	132%
2-methylhexane	81.8	18.2	16.5	11.6	26.9	163.9	123%
3-methylhexane	83.8	16.2	16.24	11.4	26.4	162.6	122%

The Example shows that compounds of the present invention
 10 have tip speeds within about 30 percent of CFC-113 and would be effective replacements for CFC-113 with minimal compressor design changes. Most preferred compositions have tip speeds within about 20 percent of CFC-113.

15

EXAMPLE 3
Performance Data

The table below shows the performance of various refrigerants compared to CFC-113. The data are based on the following conditions.

20 Evaporator temperature 40.0°F (4.4°C)
 Condenser temperature 110.0°F (43.3°C)
 Subcool temperature 10.0°F (5.5°C)
 Return gas temperature 75.0°F (23.8°C)
 Compressor efficiency is 70%

25

TABLE 7

<u>Composition</u>	<u>wt% C₄F₈OC₂H₅</u>	<u>wt% B</u>	<u>Evap Pres (Psia)</u>	<u>Evap Pres (kPa)</u>	<u>Cond Pres (Psia)</u>	<u>Cond Pres (kPa)</u>	<u>Comp Disch Temp (F)</u>	<u>Comp Disch Temp (C)</u>	<u>COP</u>	<u>Capacity (Btu/min)</u>	<u>Capacity (kW)</u>
CFC-113			2.7	19	12.8	88	156.3	69.1	14.8	4.18	0.26
C₄F₈OC₂H₅ plus B:											
cyclohexane	73.1	26.9	1.0	7.0	5.9	40	136.8	58.2	4.05	6.9	0.12
cyclopentane	29.6	70.4	2.7	19	12.5	86	149.8	65.4	4.18	16.7	0.29
2,2-dimethyl- butane	32.6	67.4	2.8	19	12.6	87	134.7	57.1	4.01	16.1	0.28
2,3-dimethyl- butane	44.7	55.3	2.1	14	10.0	69	133.9	56.6	4.00	12.5	0.22
2,3-dimethyl- pentane	82.2	17.8	0.9	6.0	5.2	36	131.5	55.3	3.97	5.9	0.10
3-ethylpentane	86.0	14.0	0.8	5.0	4.9	34	131.5	55.3	3.97	5.4	0.10
n-heptane	91.0	9.0	0.7	5.0	4.5	31	131.8	55.4	3.98	4.9	0.08
methylcyclo- pentane	62.1	37.9	1.3	9.0	7.1	49	138.2	59.0	4.07	8.7	0.15
2-methyl- hexane	81.8	18.2	0.9	6.0	5.2	36	131.6	55.3	3.97	5.9	0.10
3-methyl- hexane	83.8	16.2	0.8	6.0	5.0	35	131.6	55.3	3.97	5.6	0.10
2-methyl- pentane	47.9	52.1	1.9	13	9.4	65	137.1	58.4	4.05	11.7	0.20
3-methyl- pentane	52.1	47.9	1.7	12	8.7	60	136.9	58.3	4.05	10.8	0.19
n-pentane	9.2	90.8	4.5	31	19.2	132	150.9	66.1	4.16	26.1	0.46

Data show the compositions of the present invention have evaporator and condenser pressures similar to CFC-113. Some compositions also have higher capacity than CFC-113.

CLAIM(S)

What is claimed is :

1. A refrigerant or heat transfer fluid composition comprising $C_4F_9OC_2H_5$ and at least one hydrocarbon selected from the group
5 consisting of:
 - cyclohexane;
 - cyclopentane;
 - 3-ethylpentane;
 - 2,2-dimethylbutane;
 - 10 2,3-dimethylbutane;
 - 2,3-dimethylpentane;
 - n-heptane;
 - methylcyclopentane;
 - 2-methylhexane;
 - 15 3-methylhexane;
 - 2-methylpentane;
 - 3-methylpentane; and
 - n-pentane.
- 20 2. A refrigerant or heat transfer fluid composition suitable for use in refrigeration apparatus or air-conditioning apparatus employing (i) centrifugal compressor or (ii) multi-stage centrifugal compressor or (iii) single slab/single pass heat exchanger, said composition comprising $C_4F_9OC_2H_5$ and at least one hydrocarbon selected from the group
25 consisting of:
 - cyclohexane;
 - cyclopentane;
 - 3-ethylpentane;
 - 2,2-dimethylbutane;
 - 30 2,3-dimethylbutane;
 - 2,3-dimethylpentane;
 - n-heptane;
 - methylcyclopentane;
 - 2-methylhexane;
 - 35 3-methylhexane;
 - 2-methylpentane;
 - 3-methylpentane; and

n-pentane.

3. An azeotropic or near-azeotropic composition comprising:
about 1 to about 71 weight percent $C_4F_9OC_2H_5$ and about 99
5 to about 29 weight percent cyclopentane;
about 1 to about 71 weight percent $C_4F_9OC_2H_5$ and about 99
to about 29 weight percent 2,2-dimethylbutane;
about 1 to about 77 weight percent $C_4F_9OC_2H_5$ and about 99
to about 23 weight percent 2,3-dimethylbutane;
10 about 52 to about 99 weight percent $C_4F_9OC_2H_5$ and about
48 to about 1 weight percent 2,3-dimethylpentane;
about 56 to about 99 weight percent $C_4F_9OC_2H_5$ and about
44 to about 1 weight percent 3-ethylpentane;
about 25 to about 99 weight percent $C_4F_9OC_2H_5$ and about
15 75 to about 1 weight percent methylcyclopentane;
about 51 to about 99 weight percent $C_4F_9OC_2H_5$ and about
49 to about 1 weight percent 2-methylhexane;
about 54 to about 99 weight percent $C_4F_9OC_2H_5$ and about
46 to about 1 weight percent 3-methylhexane;
20 about 1 to about 79 weight percent $C_4F_9OC_2H_5$ and about 99
to about 21 weight percent 2-methylpentane;
about 1 to about 82 weight percent $C_4F_9OC_2H_5$ and about 99
to about 18 weight percent 3-methylpentane; or
about 1 to about 62 weight percent $C_4F_9OC_2H_5$ and about 99
25 to about 38 weight percent n-pentane.
4. An azeotropic composition comprising:
29.6 weight percent $C_4F_9OC_2H_5$ and 70.4 weight percent
cyclopentane having a vapor pressure of about 14.7 psia (101 kPa)
30 at a temperature of about 48.1 °C;
32.6 weight percent $C_4F_9OC_2H_5$ and 67.4 weight percent 2,2-
dimethylbutane having a vapor pressure of about 14.7 psia (101
kPa) at a temperature of about 48.1 °C;
44.7 weight percent $C_4F_9OC_2H_5$ and 55.3 weight percent 2,3-
35 dimethylbutane having a vapor pressure of about 14.7 psia (101
kPa) at a temperature of about 54.8 °C;

82.2 weight percent $C_4F_9OC_2H_5$ and 17.8 weight percent 2,3-dimethylpentane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 72.2 °C;

86.0 weight percent $C_4F_9OC_2H_5$ and 14.0 weight percent 3-ethylpentane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 73.5 °C;

62.1 weight percent $C_4F_9OC_2H_5$ and 37.9 weight percent methylcyclopentane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 64.5 °C;

81.8 weight percent $C_4F_9OC_2H_5$ and 18.2 weight percent 2-methylhexane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 72.1 °C;

83.8 weight percent $C_4F_9OC_2H_5$ and 16.2 weight percent 3-methylhexane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 72.8 °C;

47.9 weight percent $C_4F_9OC_2H_5$ and 52.1 weight percent 2-methylpentane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 56.5 °C;

52.1 weight percent $C_4F_9OC_2H_5$ and 47.9 weight percent 3-methylpentane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 58.7 °C; or

9.2 weight percent $C_4F_9OC_2H_5$ and 90.8 weight percent n-pentane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 35.0 °C.

25

5. A process for producing cooling, said process comprising evaporating the composition of claim 1, 2, 3, or 4 in the vicinity of a body to be cooled, and thereafter condensing said composition.

30

6. A process for producing heat, said process comprising condensing the composition of claim 1, 2, 3, or 4 in the vicinity of a body to be heated, and thereafter evaporating said composition.


35

7. A method of using the compositions of claim 1, 2, 3, or 4, for heat transfer, said method comprising transferring said composition from a heat source to a heat sink.


8. The composition of claim 1, further comprising at least one ultra-violet fluorescent dye selected from the group consisting of naphthalimides, perylenes, coumarins, anthracenes, phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, and derivatives thereof.
9. The composition of claim 8, further comprising at least one solubilizing agent selected from the group consisting of hydrocarbons, dimethylether, polyoxyalkylene glycol ethers, amides, ketones, nitriles, chlorocarbons, esters, lactones, aryl ethers, fluoroethers, and 1,1,1-trifluoroalkanes; and wherein the refrigerant or heat transfer fluid may not be the same compound as the solubilizing agent.
10. The composition of claim 9, wherein said solubilizing agent is selected from the group consisting of:
- a) polyoxyalkylene glycol ethers represented by the formula $R^1[(OR^2)_xOR^3]_y$, wherein: x is an integer from 1 to 3; y is an integer from 1 to 4; R^1 is selected from hydrogen and aliphatic hydrocarbon radicals having 1 to 6 carbon atoms and y bonding sites; R^2 is selected from aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms; R^3 is selected from hydrogen, and aliphatic and alicyclic hydrocarbon radicals having from 1 to 6 carbon atoms; at least one of R^1 and R^3 is selected from said hydrocarbon radicals; and wherein said polyoxyalkylene glycol ethers have a molecular weight of from about 100 to about 300 atomic mass units;
 - b) amides represented by the formulae $R^1CONR^2R^3$ and cyclo- $[R^4CON(R^5)-]$, wherein R^1 , R^2 , R^3 and R^5 are independently selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms, and at most one aromatic radical having from 6 to 12 carbon atoms; R^4 is selected from aliphatic hydrocarbylene radicals having from 3 to 12 carbon atoms; and wherein said amides have a molecular weight of from about 100 to about 300 atomic mass units;
 - c) ketones represented by the formula R^1COR^2 , wherein R^1 and R^2 are independently selected from aliphatic, alicyclic and aryl hydrocarbon radicals having from 1 to 12 carbon atoms, and

wherein said ketones have a molecular weight of from about 70 to about 300 atomic mass units;


- 5 d) nitriles represented by the formula R^1CN , wherein R^1 is selected from aliphatic, alicyclic or aryl hydrocarbon radicals having from 5 to 12 carbon atoms, and wherein said nitriles have a molecular weight of from about 90 to about 200 atomic mass units;
- 10 e) chlorocarbons represented by the formula RCI_x , wherein; x is selected from the integers 1 or 2; R is selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms; and wherein said chlorocarbons have a molecular weight of from about 100 to about 200 atomic mass units;
- 15 f) aryl ethers represented by the formula R^1OR^2 , wherein: R^1 is selected from aryl hydrocarbon radicals having from 6 to 12 carbon atoms; R^2 is selected from aliphatic hydrocarbon radicals having from 1 to 4 carbon atoms; and wherein said aryl ethers have a molecular weight of from about 100 to about 150 atomic mass units;
- 20 g) 1,1,1-trifluoroalkanes represented by the formula CF_3R^1 , wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms;
- 25 h) fluoroethers represented by the formula $R^1OCF_2CF_2H$, wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms; or wherein said fluoroethers are derived from fluoro-olefins and polyols, wherein said fluoro-olefins are of the type $CF_2=CXY$, wherein X is hydrogen, chlorine or fluorine, and Y is chlorine, fluorine, CF_3 or OR_f , wherein R_f is CF_3 , C_2F_5 , or C_3F_7 ; and said polyols are linear or branched, wherein said linear polyols are of the type
30 $HOCH_2(CHOH)_x(CRR')_yCH_2OH$, wherein R and R' are hydrogen, CH_3 or C_2H_5 , x is an integer from 0-4, y is an integer from 0-3 and z is either zero or 1, and said branched polyols are of the type $C(OH)_t(R)_u(CH_2OH)_v[(CH_2)_mCH_2OH]_w$, wherein R may be hydrogen, CH_3 or C_2H_5 , m is an integer from 0 to 3, t and u are 0 or 1, v and w are integers from 0 to 4, and also
35 wherein $t + u + v + w = 4$;
- i) lactones represented by structures [B], [C], and [D]:



[B]



[C]



[D]

5

wherein, R_1 through R_8 are independently selected from hydrogen, linear, branched, cyclic, bicyclic, saturated and unsaturated hydrocarbonyl radicals; and the molecular weight is from about 100 to about 300 atomic mass units; and

10

- j) esters represented by the general formula $R^1CO_2R^2$, wherein R^1 and R^2 are independently selected from linear and cyclic, saturated and unsaturated, alkyl and aryl radicals; and wherein said esters have a molecular weight of from about 80 to about 550 atomic mass units.

15

11. A method for introducing an ultraviolet fluorescent dye into a compression refrigeration or air-conditioning apparatus, said method comprising dissolving the ultraviolet fluorescent dye in the composition of claim 1, 2, 3, or 4, in the presence of a solubilizing agent, and introducing the combination into said compression refrigeration or air-conditioning apparatus.

20

12. A method for solubilizing ultraviolet fluorescent dye in the composition of claim 1, 2, 3, or 4, said method comprising contacting the ultraviolet fluorescent dye with said composition, in the presence of a solubilizing agent.

25

13. A method for detecting leaks, said method comprising providing a compression refrigeration apparatus or air-conditioning apparatus, introducing the composition of claim 8 or 9 into said apparatus, and providing a suitable means for detecting said composition in the vicinity of said apparatus.

30

14. A method of producing cooling, said method comprising:
evaporating the refrigerant or heat transfer fluid component of the
composition of claim 8 in the vicinity of a body to be cooled and thereafter
condensing said refrigerant or heat transfer fluid component.
- 5
15. A method of producing heat, said method comprising: condensing
the refrigerant or heat transfer fluid component of the composition of claim
8 in the vicinity of the body to be heated and thereafter evaporating said
refrigerant or heat transfer fluid component.
- 10
16. The composition of claim 1, 2, 3, or 4 further comprising a stabilizer,
water scavenger, or odor masking agent.
17. The composition of claim 16 wherein said stabilizer is selected from
15 the group consisting of nitromethane, hindered phenols, hydroxylamines,
thiols, phosphites and lactones.
18. A method of using the composition of claim 1, 2, 3, or 4, wherein
said method comprises producing heat or cooling in a refrigeration or air-
20 conditioning apparatus employing a multi-stage centrifugal compressor.
19. The method of claim 18 wherein said multi-stage centrifugal
compressor is a two-stage centrifugal compressor.
- 25 20. The composition of claim 16 wherein said water scavenger is an
ortho ester.
21. A process to produce cooling comprising compressing a
composition of claim 1, 2, 3, or 4, in a mini-centrifugal compressor
30 powered by an engine exhaust gas driven turbine; condensing said
composition; and thereafter evaporating said composition in the vicinity of
a body to be cooled.
22. A process to produce cooling comprising compressing a
35 composition of claim 1, 2, 3, or 4 in a mini-centrifugal compressor
powered by a ratioed gear drive assembly with a ratioed belt drive;

condensing said composition; and thereafter evaporating said composition in the vicinity of a body to be cooled.

23. A method for replacing CFC-113 in existing refrigeration apparatus
5 or air-conditioning apparatus, said method comprising providing a composition of claim 1, 2, 3, or 4 as the replacement.