

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 April 2003 (10.04.2003)

PCT

(10) International Publication Number
WO 2003/029686 A3

(51) International Patent Classification⁷: **E01F 15/00**

(21) International Application Number:
PCT/US2002/027863

(22) International Filing Date:
3 September 2002 (03.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/325,729 28 September 2001 (28.09.2001) US
10/002,833 1 November 2001 (01.11.2001) US

(71) Applicant: **ENERGY ABSORPTION SYSTEMS, INC.**
[US/US]; One East Wacker Drive, Chicago, IL 60601 (US).

(72) Inventors: **LEONHARDT, Patrick, A.**; 3779 Hillside Drive, Rocklin, CA 95677 (US). **PORTERFIELD, Andrew, A.**; 2637 River Plaza Drive #215, Sacramento, CA 95833 (US).

(74) Agent: **STOVER, Andrew, D.**; Brinks, Hofer, Gilson & Lione, P.O.Box 10087, Chicago, IL 60610 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
31 December 2003

[Continued on next page]

(54) Title: VEHICLE MOUNTED CRASH ATTENUATOR CROSS REFERENCE TO RELATED PATENT APPLICATION

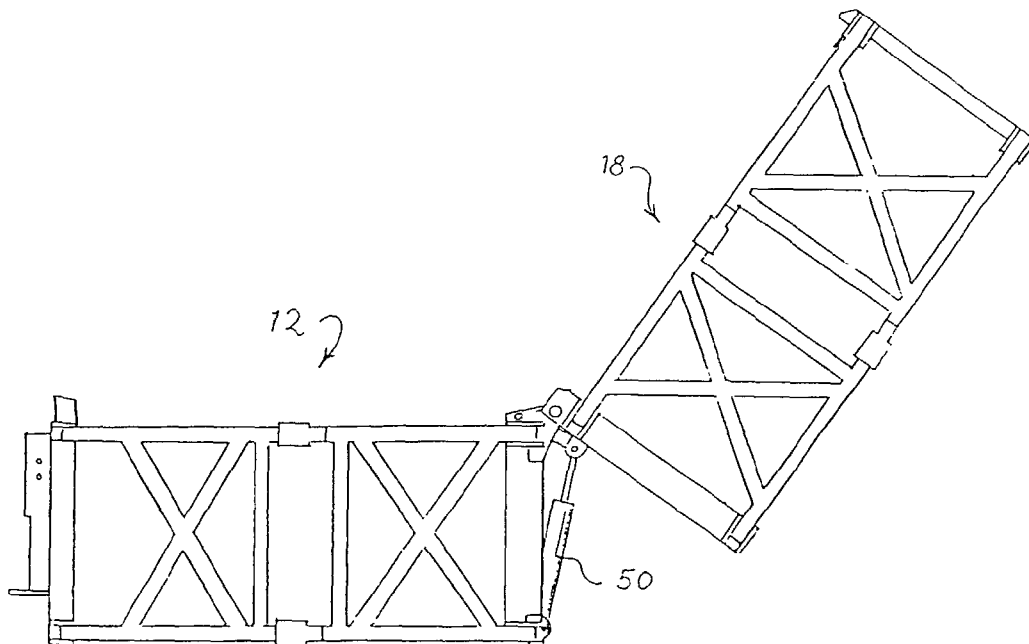

(57) Abstract: A vehicle mounted crash attenuator (10) includes first and second bays (12, 18) mounted at one end to a truck (T). The second bay is rotated from a horizontal, deployed position, disposed behind the first bay (12); to a retracted position disposed above the first bay (12). An actuator (50) rotates the second bay through an arc exceeding 90 degrees between the deployed and retracted positions.

WO 2003/029686 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.