

RTMP WDP

- 1 -

CLADDING UNITS FOR BUILDING AND SEAL STRUCTURE FOR JOINT THEREOFBACKGROUND OF THE INVENTION

1. Field of the Invention:

5 This invention relates to cladding units or facing units for forming the outer wall of a building and a structure for sealing a joint between adjoining cladding units.


2. Description of the Prior Art:

10 As one form of the outer wall of a building, the unit type curtain wall that is formed by joining curtain walls side by side vertically and laterally as attached to the skeleton frame of a building is known. Generally, the curtain wall units each comprise a framework, a panel or screen fitted to the framework, and a dry seal member fitted to the perimeter of the
15 framework.

When the curtain wall units mentioned above are attached as vertically and laterally adjoined to one another to the skeleton frame of a given building, the seal members of these adjoining curtain wall units are pressed against one another
20 and the joints consequently formed therebetween are sealed. It is, however, very difficult to press the seal members correctly against one another. Even when they are correctly pressed, the joints are not always sealed fully effectively. Usually, therefore, the joints between the adjoining curtain wall units
25 are sealed by filling the joints with a wet sealing material. This work of filling the joints with the wet sealing material turns out to be very irksome.

SUMMARY OF THE INVENTION

This Sheet Has Been Replaced

REPLACED SHEETS SG

☒ Description	: paged	1	to paged	27
☒ Claim(s)	: paged	28	to paged	34
☒ Drawing(s)	: paged	1	to paged	26
☒ Abstract	: paged	25	to paged	

It is, therefore, an object of the present invention to provide cladding units or facing units and a seal structure for the joints thereof which are liberated from the problems mentioned above.

5 In accordance with one aspect of the present invention, there is provided a cladding unit which comprises a cladding member comprised of a framework and a face member attached to one side face thereof and fastener stringers for a waterproof slide fastener attached one each to the outer lateral parts of
10 the cladding member, the fastener stringers mentioned above each comprising a waterproof tape and an engaging part provided with a multiplicity of coupling elements attached to the waterproof tape as spaced at fixed intervals along one longitudinal edge thereof, the end parts of the waterproof
15 tapes of all adjoining fastener stringers being integrally joined, and the joined corner parts of the waterproof tapes protruding from the corner parts of the framework. According to this structure, the joint between two adjoining cladding units can be infallibly sealed by uniting the opposed fastener stringers of the cladding units with a slider and the gap
20 between the framework and each of the fastener strings can be sealed so securely as to prevent rainwater from leaking through the corner parts of the framework.

In a preferred mode of this aspect of the invention, the
25 engaging part of the fastener stringers mentioned above is so formed that one end part thereof will protrude from one end part of the waterproof tape in the direction of length thereof. When the opposed fastener stringers of the adjoining



cladding units are to be united, therefore, the insertion thereof into a slider is facilitated because the relevant engaging parts protruding on one end side thereof from the corresponding waterproof tapes can be drawn out from between the adjoining cladding units and inserted into the slide groove of the slider.

Another aspect of the present invention consists in providing a seal structure for the joint to be formed between the opposed frameworks of the cladding units mutually adjoined and attached to the backing member of the building.

In a basic mode of this aspect of the invention, the joint formed between the adjoining cladding units is sealed by coupling the engaging parts of the opposed fastener stringers of the cladding units. The gaps formed between the end parts of the fastener stringers, for example, at the cruciform joint due to the intersection of a lateral joint and a vertical joint and at the T-shaped joint due to the T-shaped adjoining of three cladding units are sealed by either attaching the relevant waterproof sheets through the medium of an adhesive agent or by means of thermal welding to the joined corner parts of the waterproof tapes of the fastener stringers protruding from the corner parts of the frameworks of the cladding units or by further filling the joined corner parts with a wet sealing material.

As another mode of the seal structure, a seal structure is provided which is capable of sealing the end-part joint between the end parts of a first and a second cladding unit which adjoin each other and a wall in an opening of a building with a



wet sealing material. In one mode of this seal structure, the joint between the first and second cladding units is sealed by coupling the engaging parts of the opposed fastener stringers of the first and second cladding units. In the end part in which the joint between the first and second cladding units confronts the wall surface in the opening of the building, the end parts of a pair of opposed fastener stringers of the first and second cladding units are extended to the end parts of the waterproof tapes opposed to the wall of the building and joined integrally to the end parts of the waterproof tapes thereby connecting the waterproof tapes opposed to the wall of the building through the medium of the extended parts of the coupled fastener stringers. The waterproof tapes joined as described above and opposed to the wall of the building and the extended parts of the fastener stringers are bent so that the bent parts are opposed to the wall of the building. The gaps between the wall of the building and the bent parts of those of the waterproof tapes and the fastener stringers of the first and second cladding units that are opposed to the wall of the building are sealed by filling the gaps with the wet sealing material.

In another mode of the seal structure for the end-part joint, the waterproof tapes of the first and second cladding units which are opposed to the wall in the opening of the building are bent so that the bent parts of the waterproof tapes are opposed to the wall of the building. A waterproof sheet is disposed as tightly joined over the building wall side end parts of the waterproof tapes of the coupled fastener


This Sheet Has Been Replaced



stringers and the opposed end parts of the bent waterproof tapes opposed to the wall of the building so as to cover the gap between the opposed end parts of the bent waterproof tapes. The gaps between the wall of the building and the waterproof sheet and tapes of the first and second cladding units opposed to the wall of the building are sealed by filling the gaps with the wet sealing material.

According to yet another mode of the present invention, a seal structure is provided which is capable of sealing the joint to be formed where an obstacle thrusts out from between the first and second cladding units arranged in an adjoining state with a wet sealing material. In this seal structure, depressed parts adapted jointly to conform to the contour of the obstacle are formed one each in the first and second cladding units thereby interrupting the continuity of the fastener stringers in the depressed parts. The waterproof tapes are attached to the surfaces of the depressed parts. The end parts of the waterproof tapes of the depressed parts are joined to the waterproof tapes of the opposed fastener stringers mentioned above. The waterproof tapes are bent such that the bent parts thereof are opposed to the obstacle. The engaging parts of the opposed fastener stringers attached to the first and second cladding units mentioned above are mutually coupled thereby sealing the joints on the opposite sides across the obstacle as the boundary. The gaps between the obstacle and the end parts of the coupled fastener stringers mentioned above and the gaps of the obstacle and the waterproof tapes of the depressed parts are sealed by filling

This Sheet Has Been Replaced



the gaps with the wet sealing material.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features, and advantages of the invention will become apparent from the following description taken
5 together with the drawings, in which:

Fig. 1 is a schematic front view showing the state in which cladding units are fixed to the skeleton frame of a building;

Fig. 2 is a front view of one of such cladding units;

10 Fig. 3 is a front view of joined fastener stringers;

Fig. 4 and Fig. 5 are respectively a cross section taken through Fig. 2 along the line IV - IV and a cross section taken therethrough along the line V-V;

15 Fig. 6 is a cross-sectional view of a fixing part of the cladding units attached to a backing member of the skeleton frame of the building;

Fig. 7 is a fragmentary longitudinal section of a cruciform joint among cladding units;

20 Fig. 8 is a cross section taken through Fig. 7 along the line IIX - IIX;

Fig. 9 is a fragmentary longitudinal section of a T-shaped joint among cladding units;

Fig. 10 is a cross section taken through Fig. 9 along the line X - X;

25 Fig. 11 is a perspective view of the joined fastener stringers for a cladding unit adjoining an edge part of the wall in the opening of the building;

Fig. 12 is a fragmentary perspective view showing the



state of coupling the upper and the lower fastener stringer of the adjoining cladding units adjoining the edge part of the wall in the opening of the building;

Fig. 13 is a fragmentary side view showing the state of coupling vertically adjoining cladding units along the edge part of the wall in the opening of the building;

Fig. 14 is a fragmentary longitudinal section of an end part joint of vertically adjoining cladding units along the edge part of the wall in the opening of the building;

Fig. 15 is a cross section taken through Fig. 14 along the line XV - XV;

Fig. 16 is a front view of another embodiment of the joined fastener stringers for a cladding unit adjoining the edge part of the wall in the opening of the building;

Fig. 17 is a fragmentary perspective view of the state of coupling the upper and the lower fastener stringer of the adjoining cladding units adjoining the edge part of the wall in the opening of the building;

Fig. 18 is a fragmentary perspective view of the state of adhesion of a waterproof sheet to the end parts of the upper and lower waterproof tapes joined to the coupled fastener stringers as shown in Fig. 17;

Fig. 19 is a fragmentary longitudinal section of a joint along the periphery of an obstacle;

Fig. 20 is a front view of a cladding unit having a glass plate as a face member;

Fig. 21 is a cross section taken through Fig. 20 along the line XXI - XXI;



Fig. 22 is a cross section taken through Fig. 20 along the line XXII - XXII;

Fig. 23 and Fig. 24 are respectively a longitudinal section and a cross-sectional view showing a connecting part
5 between a cladding unit having a face material thereof formed of a board material and a cladding unit having a face material thereof formed of a glass plate; and

Fig. 25 and Fig. 26 are respectively a longitudinal section and a cross-sectional view showing an embodiment
10 having adjoining cladding units so united that their surfaces do not fall flush.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A plurality of lateral backing members 3 made of steel and a plurality of vertical backing members 4 made of steel are
15 fixed in an opening 2 in a skeleton frame of a building 1 and cladding units 5 are fixed to the outdoor sides of the upper and lower lateral backing members 3 and the left and right vertical backing members 4 as shown in Fig. 1. The end part joints between the cladding units 5 and vertical edge parts 6
20 and lateral edge parts 7 in the opening of the building and lateral joints and vertical joints between vertically and laterally adjoining cladding units 5 are severally sealed with a waterproof slide fastener and a waterproof sheet which will be specifically described hereinafter.

25 The cladding units 5 mentioned above, as shown in Fig. 2, each comprise a cladding member 15 consisting of a framework 13 formed by joining an upper frame member 10, a lower frame member 11, and laterally opposite vertical frame members 12 in



the shape of a square and a face member 14 fixed to the outdoor side surface of the framework 13 and fastener stringers 16 attached to the frame members 10, 11, and 12. The fastener stringers 16 are severally paired with those of the cladding units 5 which are adjoined as opposed thereto and, consequently, are enabled to form waterproof slide fasteners in cooperation therewith.

The fastener stringers 16 mentioned above, as shown in Fig. 3, each comprise a waterproof tape 17 and an engaging part 18 having a multiplicity of coupling elements 19 fixed to the waterproof tape 17 as regularly spaced along one longitudinal edge part thereof. One end part 18a of the engaging part 18 protrudes from one end part 17a of the waterproof tape 17 in the longitudinal direction thereof so as to permit easy insertion thereof into a slide groove of a slider 31, as shown in Fig. 2.

The opposite end parts of each waterproof tape 17 are cut at an angle of 45 degrees and the end parts of the adjoining waterproof tapes 17 are opposed and joined by thermal welding. While four fastener stringers 16 are consequently joined in the shape of a square, notches 16a are formed one each in corner parts 17b of the joined fastener stringers 16 so as to prevent the relevant engaging parts 18 from continuing and allow extraction of a slider. Optionally, the end parts of the adjoining waterproof tapes 17 may be allowed to overlap and are joined to each other by means of thermal welding or an adhesive agent.

The substance of which the waterproof tape 17 is made is

This Sheet Has Been Replaced



silicone rubber. The waterproof tape 17, therefore, excels in weatherability and durability and exhibits good fastness of adhesion to a waterproof sheet and the wet sealing material, a silicone sealant which will be specifically described
5 hereinbelow.

In the embodiment described above, the face member 14 has been depicted as formed of a plate material. Optionally, it may be made of a glass material, a screen, or other materials.

10 The frame members 10, 11, and 12 mentioned above, as shown in Fig. 4 and Fig. 5, each comprise an elongate inner wall part 20, an elongate outer wall part 22, and a connecting part 21 serving to connect the longitudinal edges of these wall parts, which are so joined as to form a cross section roughly in the
15 shape of three sides of a square. The outer edge part of the connecting part 21 is bent in the shape of a crank to form a tape fixing part 23 along the outer wall part 22. In the other longitudinal edge of the outer wall part 22, a plurality of outwardly protruding fixing pieces 24 are integrally formed as
20 spaced with prescribed intervals in the longitudinal direction thereof. To the connecting parts 21 of the frame members 10, 11, and 12, the face member is fixed with securing devices or fasteners 25. The rear side of the face member 14 is separated from the tape fixing part 23 to form a depressed part 26
25 therebetween. The fixing pieces 24 protrude outwardly from the peripheral edges of the face member 14.

The end parts of the frame members 10, 11, and 12 are cut at an angle of 45 degrees and abutted and connected by welding

This Sheet Has Been Replaced



or by means of a corner block or a connecting piece. The longitudinal edge part of each of the waterproof tapes 17 which form the fastener stringers 16 is secured to the tape fixing parts 23 with a securing device or fastener 28 through the medium of a retainer piece 27. The retainer pieces 27 and the securing devices 28 are disposed inside the depressed parts 26 and are covered with the face member 14 and therefore placed out of sight. The longitudinal edge part of each of the waterproof tapes 17 and the one end parts 18a of the engaging parts 18 protrude outwardly from the face member 14. The depressed parts 26 (the gaps between the face member 14 and the waterproof tapes 17) are each filled with a wet sealing material 29 such as silicone rubber through the medium of a backup member 29a formed of a plastic foam such as a hard polyurethane foam. Owing to the use of the wet sealing material 29 in this manner, the waterproof tapes 17 of the four squarely joined fastener stringers 16 are tightly secured to the framework 13 and the joined corner parts 17b of the adjoining waterproof tapes 17 are allowed to protrude outwardly from the corner parts of the framework 13.

The cladding unit 5 is assembled by fixing the four squarely joined fastener stringers 16 to the framework 13 and thereafter fixing the face member 14 thereto.

The cladding units 5 are assembled at a factory, for example, and then transported to a site for the fixation on a building. The fixing pieces 24 of the vertical frame members 12 of the laterally adjoining cladding units 5 are severally secured with a securing device or fastener 30 such as, for



example, a screw to the vertical backing member 4 as shown in Fig. 6 and, at the same time, the fixing pieces 24 of the upper and lower frame members 10, 11 of the vertically adjoining cladding units 5 are severally secured with a securing device such as, for example, a screw to the lateral backing member 3. The fixing pieces 24 each have an oblong hole 24a formed therein (see Fig. 2 and Fig. 6). Since the oblong holes 24a are so adapted that the securing device 30 may be inserted therethrough, the cladding units 5 are allowed to move in the direction of plane.

In the state in which the laterally adjoining cladding units 5 are fixed to the lateral backing members 3 and the vertical backing members 4 of the skeleton frame of the building 1, the engaging parts 18 of the fastener stringers 16 attached to the vertical frame members 12 are opposed to each other. The outwardly projecting one-end parts 18a of the paired engaging parts 18 are drawn out from between the laterally adjoining cladding units 5 and are inserted in a slider 31 as indicated by an imaginary line in Fig. 2. The slider 31 is moved in the direction of length of the paired engaging parts 18 to mesh the coupling elements 19 of the engaging parts 18 of the paired fastener stringers 16. Then, the slider 31 is extracted through the notch 16a in the other end part of the paired fastener stringers 16.

Since the waterproof tapes 17 of the pair of the fastener stringers 16 are airtightly and watertightly coupled as a result of the procedure described above, the vertical joint between the laterally adjoining cladding units 5 can be sealed



infallibly. Since the slider 31 is engaged with the engaging parts 18 on the outer side than between the laterally adjoining cladding units 5, the work of coupling of the fastener stringers is easy to perform.

5 Since the lateral joint between the vertically adjoining cladding units 5 is sealed in the same manner as described above, it can be sealed infallibly.

The outwardly projecting one-end parts of the engaging parts 18 of the fastener stringers 16 may be either cut off or
10 left per se after they have been coupled by means of the slider 31. In the illustrated embodiments, they are depicted in a cut state.

Now, the seal structure for the cruciform joint (the part indicated by A in Fig. 1) formed by the vertically and
15 laterally adjoining cladding units 5 will be described below.

Since the fastener stringers 16 have their continuity interrupted in the part of the cruciform joint resulting from the intersection of the lateral joint and the vertical joint as shown in Fig. 7, an opening S_1 of the shape of a square occurs
20 in the part mentioned above.

The opening S_1 mentioned above, therefore, is closed by joining a cruciform waterproof sheet 32 with an adhesive agent 33 to the joined corner parts 17b of the waterproof tapes 17 of the fastener stringers 16 protruding from the corner parts of
25 the framework 13 in the part of the cruciform joint as shown in Fig. 7 and Fig. 8 so that the part of the cruciform joint is sealed by continuing the joined corner parts 17b of the waterproof tapes 17 of the fastener stringers 16 through the



medium of the waterproof sheet 32. This sheet 32 may be joined to the joined corner parts 17b of the waterproof tapes 17 by means of thermal welding.

The waterproof sheet 32 is made of a material such as
5 silicone resin which excels in weatherability and durability and manifests fast adhesiveness to the waterproof tapes 17. It is appropriate to adopt an adhesive agent 33 using a silicone basis.

When the waterproof sheet 32 is to be joined by adhesion
10 as described above, it is difficult to implement this adhesion by depressing the sheet 32 with strong force against the waterproof tapes 17 because the waterproof tapes 17 are separated from the lateral backing members 3 and the vertical backing members 4. The present seal structure, therefore,
15 attains this adhesion infallibly by fixing a cruciform receiving block 34 to the lateral backing members 3 and the vertical backing members 4 and thereby causing this receiving block 34 to support the waterproof tapes 17 and allow the sheets 32 to be depressed with strong force against the
20 waterproof tapes 17, as shown in Fig. 7 and Fig. 8. This receiving block 34 is provided with a cruciform groove 34a for admitting the engaging parts 18.

Optionally, the seal aimed at may be obtained by filling the opening S₁ with a wet sealing material such as silicone
25 rubber instead of the adhesion of the waterproof sheet 32.

Next, the seal structure for the T-shaped joint (the part indicated by B in Fig. 1) to be formed among three cladding units 5 in such a manner that one of the cladding units 5 will

This Sheet Has Been Replaced



adjoin astraddle to the other two cladding units 5', 5'' disposed as adjoined to each other will be described below.

5 The laterally opposite fastener stringers 16', 16'' attached to the upper frame members 10', 10'' of the laterally adjoining cladding units 5', 5'' are severally coupled with the fastener stringer 16 attached to the lower frame member 11 of the upper cladding unit 5 as shown in Fig. 9. Since a gap occurs between the end parts of the laterally opposite fastener stringers 16', 16'', however, the fastener stringers 16', 16''
10 have the continuity thereof interrupted in the part of the T-shaped joint resulting from the intersection of the lateral joint and the vertical joint and consequently give rise to an opening S₂ of the shape of a square in the part mentioned above.

The opening S₂ mentioned above, therefore, is closed by
15 joining a generally T-shaped waterproof sheet 35 with an adhesive agent 36 to all the joined corner parts 17b of the waterproof tapes 17', 17'' of the laterally opposite fastener stringers 16', 16'' and the waterproof tape 17 of the upper fastener stringer 16 in the part of the T-shaped joint as shown
20 in Fig. 9 and Fig. 10 and, at the same time, the part of the T-shaped joint is sealed by continuing the fastener stringers 16, 16', and 16'' through the medium of the sheet 35.

In this case, as in the case of sealing the part of the cruciform joint mentioned above, a T-shaped receiving block 37
25 is disposed on the intersection of the lateral backing members 3 and the vertical blocking members 4 so that the waterproof sheet 35 will be infallibly joined to the waterproof tapes 17, 17', and 17'' by being depressed with strong force against the

This Sheet Has Been Replaced



waterproof tapes 17, 17', and 17''. This receiving block 37 likewise has a groove 37a incised in the surface thereof.

The fastener stringers 16', 16'' of the lower laterally adjoining cladding units 5', 5'' are severally coupled with the opposite one fastener stringer 16 attached to the lower frame member 11 of the upper cladding unit 5 on the opposite longitudinal edge portions relative to the medial portion as the boundary as shown in Fig. 9. The fastener stringer 16 attached to the lower frame member 11 of the upper cladding unit 5 mentioned above is, therefore, divided into a first fastener stringer 16-1 and a second fastener stringer 16-2 as shown in Fig. 9, the separated end parts of the waterproof tape 17 are joined by thermal welding, and an edge of the thermally welded part is partly notched to permit removal of the slider.

The one-end parts of the engaging parts 18 of the second fastener stringer 16-2 and the lower fastener stringer 16'' connected thereto are formed so as to protrude from the waterproof tapes 17 in the longitudinal direction thereof as indicated by an imaginary line in Fig. 9.

In such an arrangement, the lower left fastener stringer 16' attached to the upper frame member 10' of the left cladding unit 5' and the upper first fastener stringer 16-1 attached to the lower frame member 11 of the upper cladding unit 5 are coupled with each other by engaging the slider with the left end parts respectively of these fastener stringers and moving the slider along the joint length of these fastener stringers. This slider is removed in the opening S₂ in the T-shaped joint. The lower right fastener stringer 16'' attached to the



upper frame member 10'' of the right cladding unit 5'' and the upper second fastener stringer 16-2 are coupled with each other by engaging the slider with the medial end parts positioned in the part of the T-shaped joint (the one-end parts 18a of the longitudinal engaging parts 18) respectively of these fastener stringers and moving the slider along the joint length of the fastener stringers. Thus, the engagement of the slider with fastener stringers is easily performed. Optionally, the one-end parts 18a of the engaging parts 18 may be kept from protruding from the waterproof tapes 18 in their longitudinal direction.

The T-shaped joint formed by the lower cladding unit 5 and the laterally paired upper cladding units 5 indicated by C in Fig. 1 is sealed in the same manner as described above. The seal aimed at may be attained by filling the opening S_2 with a wet sealing material instead of the adhesion of the waterproof sheet 35.

Now, the seal structure for the end part joint to be formed between the vertically adjoining cladding units 5 and the vertical edge part 6 of the wall in the opening of the building (the part indicated by D in Fig. 1) will be described below.

First, the end part structure of the lateral joint between the vertically adjoining cladding units on the side of the wall in the opening of the building will be explained.

The end parts 16b on the wall side of the building of the upper and lower fastener stringers 16 attached to the cladding unit 5 opposed to the vertical edge part 6 of the wall in the

This Sheet Has Been Replaced




opening of the building 1 are bent as shown in Fig. 11. The longitudinal edge of the vertical waterproof tape 17 opposed to the vertical edge part 6 of the wall in the opening of the building 1 is bent and consequently brought into contact with the outer wall part 22 of the vertical frame member 12 and the upper and lower end parts thereof are joined to the end parts 16b of the upper and lower fastener stringers 16 mentioned above by thermal welding or adhesion. In the embodiment shown in Fig. 11, the waterproof tapes 17 are exclusively attached to the vertical frame members of the cladding units 5 opposed to the vertical edge part 6 of the wall in the opening of the building 1. The fastener stringers provided with an engaging part 18 may be used in the place of the waterproof tapes 17.

Owing to the structure described above, the waterproof tapes 17 are continued in the vertical direction in the longitudinal edges thereof opposed to the vertical edge parts 6 of the wall in the opening of the building 1 and, at the same time, continued also to the fastener stringers 16 in the part of the lateral joint through the medium of the end parts 16b thereof as shown in Fig. 12 when the upper fastener stringers 16 attached to the lower frame member 11 of the upper one of the vertically adjoining cladding units 5 and the lower fastener stringer 16 attached to the upper frame member 10 of the lower cladding unit 5 are coupled with the slider as mentioned above.

As a result, the upper and lower fastener stringers 16 which serve to seal the lateral joint between the vertically adjoining cladding units 5 are continued as far as the one-side

This Sheet Has Been Replaced



end parts thereof and, at the same time, the waterproof tapes 17 thereof are continued to the vertical waterproof tapes 17 of the upper and lower cladding units 5 and the waterproof tapes 17 are attached as continued to the one-side parts of the 5 vertically adjoining cladding units throughout the entire length thereof as shown in Fig. 13.

Now, the seal structure for the gap between the upper and lower cladding units and the lateral edges of the wall in the opening of the building will be described below.

10 The seal aimed at is accomplished by fixing the fixing pieces 24 of one of the vertical frame members 12 with a securing device or a fastener 40 to the vertical backing member 4 attached to the end part of the skeleton frame in the opening of the building 1 and filling the vertical joints formed 15 between the vertical edge part 6 of the wall and the vertical backing member 4 of the skeleton frame of the building 1 and one of the vertical frame members 12 with a wet sealing material 42 through the medium of a backup member 41 disposed on the fixing piece 24 along the vertical edge part 6 of the 20 wall throughout the upper and lower cladding units 5 as shown in Fig. 14 and Fig. 15.

Now, the second embodiment of the seal structure for the end part joint mentioned above will be described below.

25 The one-end parts of the upper and lower fastener stringers 16 are given a length for reaching the bending line 17c of the vertical waterproof tape 17 as shown in Fig. 16. In the state in which the opposed upper and lower fastener stringers 16 of the upper and lower cladding units 5 are

This Sheet Has Been Replaced



mutually coupled, the waterproof tapes 17 of the coupled fastener stringers 16 and the upper and lower end parts of the vertical waterproof tapes 17 of the upper and lower cladding units 5 are deprived of their continuity as shown in Fig.17.

5 Then, as shown in Fig. 18, a waterproof sheet 43 is joined by thermal welding or with an adhesive agent to the end parts of the waterproof tapes 17 of the coupled fastener stringers 16 and the vertical waterproof tapes 17 of the upper and lower cladding units 5 to establish continuity between the vertical
10 waterproof tapes 17 of the vertically adjoining cladding units 5 and the waterproof tapes 17 of the coupled fastener stringers 16 serving to seal the lateral joint and the gap formed with the longitudinal edge parts 6 of the wall in the opening of the building 1 is filled with the wet sealing material.

15 Incidentally, the end part joint which is formed between the lateral edge part 7 of the wall in the opening of the building 1 and the laterally adjoining cladding units 5 as indicated by E in Fig. 1 is sealed in the same manner as described above.

20 Now, the structure for sealing the joint to be formed between the adjoining cladding units 5 and an obstacle 50 such as the post for an arcade, which is indicated by F in Fig. 1, will be described below on the assumption that the obstacle 50 thrusts from between the adjoining cladding units 5.

25 The lower frame member 11 of the upper cladding unit 5 is divided by the obstacle 50 as a boundary into a first and a second frame member, 11-1 and 11-2, as shown in Fig. 19 and the first and the second frame member, 11-1 and 11-2, are connected

through the medium of an auxiliary frame member 51 of the shape of three sides of a square to give rise to a depressed part 52 generally conforming to the cross section of the upper half of the obstacle 50.

5 The auxiliary frame member 51 is obtained by connecting three frame members having the same cross-sectional shape as the lower frame member 11 end to end in the shape of three sides of a square with a lower open side. One edge part of the waterproof tape 17 in the same shape of three sides of a square
10 is attached to the auxiliary frame member 51 and the other edge part of the waterproof tape 17 is belt along the bent line 17c and joined to the bent end parts of the waterproof tapes 17 of the fastener stringers 16 attached to the first and second frame members 11-1 and 11-2 by thermal welding or adhesion.

15 The upper frame member 10 of the lower cladding unit 5 is also divided by the obstacle 50 as a boundary into a first and a second frame member, 10-1 and 10-2, in the same manner as above, and the first and the second frame member, 10-1 and 10-2, are connected through the medium of an auxiliary frame
20 member 53 of the shape of three sides of a square to give rise to a depressed part 54 generally conforming to the cross section of the lower half of the obstacle 50.

 The auxiliary frame member 53 is also obtained by connecting three frame members having the same cross-sectional
25 shape as the upper frame member 10 end to end in the shape of three sides of a square with an upper open side. One edge part of the waterproof tape 17 in the same shape of three sides of a square is attached to the auxiliary frame member 53 and the



other edge part of the waterproof tape 17 is belt along the bent line 17c and joined to the bent end parts of the waterproof tapes 17 of the fastener stringers 16 attached to the first and second frame members 10-1 and 10-2 by thermal
5 welding or adhesion.

Owing to the structure described above, when the engaging parts 18 of the vertically adjoining lateral fastener stringers 16 are mutually coupled, the vertical waterproof tapes 17 attached to the upper auxiliary frame member 51 and the
10 vertical waterproof tape 17 attached to the lower auxiliary frame member 53 are connected to the end parts of the waterproof tapes 17 of the coupled lateral fastener stringers 16 in the same manner as the seal structure for the end part joint mentioned above (Fig. 13).

15 Then, the gap between an outer surface 50a of the obstacle 50 opposed to the depressed parts 52, 54 of the upper and lower cladding units 5 and the waterproof tapes 17 is sealed by filling the gap with a wet sealing material 55 through the medium of a backup member. Incidentally, the fixing pieces 24
20 are integrally provided for the component frame members of the upper and lower auxiliary frame members 51, 53 as connected in the direction of length of the edge parts thereof. The fixing pieces 24 serve as receiving means for the backup member. Alternatively, platelike receiving members may be fixed to the
25 outer surface 50a of the obstacle 50 or to the lateral backing member 3 and the vertical backing member 4.

Now, an embodiment of the cladding unit 5 using the face member 14 made of glass will be described below.

This Sheet Has Been Replaced



The framework 13 is formed, as shown in Fig. 20, by abutting and connecting the opposite ends of the upper frame member 10 to the upper parts of the left and right vertical frame members 12 and the opposite ends of the lower frame member 11 to the lower parts of the left and right vertical frame members 12.

Hooklike tape fixing members 80 are fixed one each closely to the outdoor edge parts of the outdoor side surfaces 10a, 11a, and 12a of the frame members 10, 11, and 12 in the in-face direction in such a manner as to protrude from the surfaces. The tape fixing members 80, as shown in Fig. 21 and Fig. 22, are each formed of an attaching piece 81 and an outwardly turned piece 82 which are joined to form a cross section of the shape of the letter L. The fixing pieces 81 are severally fixed to the outer surfaces 10a, 11a, and 12a respectively of the frame members 10, 11, and 12 with screws 83. Repressing pieces 85 are fixed one each to the outwardly turned pieces 82 with screws 84. Cover members 86 are fixed in the manner of the snap-in engagement to the retaining pieces 85 to give rise to depressed parts 87 which open toward the outdoor side between the outer faces 10a, 11a, and 12a of the frame members 10, 11, and 12 and the relevant cover members 86.

The opposite end parts of the tape fixing members 80, the repressing pieces, and the cover members 86 are cut at an angle of 45 degrees and butt joined. The depressed parts 87 are filled throughout their combined length with a wet sealing material 88 to seal the gaps between the framework 13 and the tape fixing members 80.

This Sheet Has Been Replaced



The face member 14 is formed of a glass plate and, as shown in Fig. 21 and Fig. 22, is attached through the medium of a sealing member 90 to inwardly open groove 89 of the upper frame member 10, the lower frame member 11, and the left and right vertical frame members 12. The cladding unit 5 is an ordinary fixed fit sash.

The one-side edge parts of the waterproof tapes 17 of the component fastener stringers 16 of the waterproof slide fastener are attached as depressed with the depressing pieces 85 to the outwardly turned pieces 82 of the tape fixing members 80 and the gaps between the waterproof tapes 17 and the cover members 86 are sealed with a wet sealing material 91 so as to keep rainwater from infiltrating the waterproof tape fixing parts.

A frame material intended to form an ordinary fixed fit sash can be applied for the frame members 10, 11, and 12. It suffices specifically to fix the tape fixing members 80 one each to the outer faces 10a, 11a, and 12a of the frame members 10, 11, and 12 and attach the waterproof tapes 17 of the fastener stringers 16 to the tape fixing members 80.

For the purpose of adjoining the cladding unit 5 having the face member 14 formed of a glass plate to the cladding unit 5 of the first embodiment having the face member 14 formed of a board as shown in Fig. 2, it suffices to join the fixing pieces 24 of the frame members 10, 11, and 12 through the medium of fasteners 94 to the edge parts of an opening 93 of a skeleton frame 92 of a building by means of bolts 95, oppose the cladding units 5 to the opening 93 and fix the cladding units 5



in one plane, and unite the engaging parts 18 of the adjoining fastener stringers 16 by means of the slider as shown in Fig. 23 and Fig. 24. The cladding unit 5 having the face member 14 formed of a glass plate is fixed by causing flange parts 99 of the frame members 10, 11, and 12 to be nipped between a retaining member 97 and a bracket 96 secured to the skeleton frame 92 of the building so as to thrust out from the opening 93 and tying them with screws 98.

Optionally, the tape fixing members 80 may be integrally formed on the outer faces 10a, 11a, and 12a of the frame members 10, 11, and 12.

Now, an embodiment of fixing adjoining cladding units 5 in such a manner that their surfaces will not fall flush.

The fixing pieces 24 of the frame members 10, 11, and 12 of the cladding unit 5 having the face member 14 formed of a board are severally coupled to the fasteners 94 and fixed so as to thrust further on the outdoor side than the skeleton frame 92 of the building as shown in Fig. 25 and Fig. 26.

An ordinary cladding member 15 such as, for example, a fixed fitting sash or an open-close sash is disposed inside the opening 93 of the skeleton frame 92 of the building. Outer frames 100 are fixed one each through the medium of a fixing piece 101 to outdoor surfaces 10b, 11b, and 12b in the out-face direction respectively of the frame members 10, 11, and 12 of the cladding member 15 and the fixing parts thereof are sealed with a wet sealing material 102.

The outer frames 100 each comprise a first plate 103 extended in the out-face direction and a second plate 104



extended in the in-face direction and assume a substantially hook-shaped cross section. A tape fixing member 105 is fixed jointly to the first plate 103 and the second plate 104 by means of bolts 106. The tape fixing member 105 is provided with a fixing piece 107 and a hooklike projecting piece 108. The one-side edge parts of the waterproof tapes 17 of the component fastener stringers 16 are attached as depressed with the depressing pieces 109 by means of screws 110 to the hooklike pieces 108a of the hooklike projecting pieces 108 in the same manner as mentioned above. A wet sealing material 111 is filled in the gap between the second plates 104 and the waterproof tapes 17 of the fastener stringers 16.

As the fixing piece 107 of the tape fixing member 105 is fixed to the fastener 94, the second plate 104 falls flush with the face member 14 and the adjoining fastener stringers 16 are opposed to each other. The engaging parts 18 of the adjoining fastener stringers 16 are meshed with each other by means of the slider.

Owing to the structure described above, the gaps between the ordinary cladding member 15 and four cladding units 5 can be sealed with the waterproof slide fasteners when the ordinary cladding member 15 is fixed in the opening 93 of the skeleton frame 92 of the building and fixing the cladding units 5 having the face member 14 thereof formed of a board one each to the vertical and lateral edge parts of the opening 93.

While certain specific embodiments have been disclosed herein, the invention may be embodied in other specific forms without departing from the spirit or essential characteristics

This Sheet Has Been Replaced



thereof. The described embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing description and all changes
5 which come within the meaning and range of equivalency of the claims are, therefore, intended to be embraced therein.

This Sheet Has Been Replaced





WHAT IS CLAIMED IS:

1. A cladding unit for a building, comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework.

2. The cladding unit according to claim 1, wherein one-end part of said engaging part of each of said fastener stringers protrudes from one-end part of said waterproof tape in the longitudinal direction of the tape.

3. The cladding unit according to claim 1 or 2, which has notches formed one each in said joined corner parts of the waterproof tapes so as to interrupt the continuity of said engaging parts of adjoining fastener stringers.

4. A seal structure for a cruciform joint of four vertically and laterally adjoining cladding units attached to a backing member of a building,

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of





- 29 -

said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said
5 waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

a lateral joint of said cruciform joint being sealed by
10 coupling said engaging parts of said fastener stringers of vertically adjoining cladding units and a vertical joint thereof being sealed by coupling said engaging parts of said fastener stringers of laterally adjoining cladding units; and

said cruciform joint due to the intersection of said
15 lateral joint and said vertical joint having a waterproof sheet disposed as tightly attached over joined corner parts of said waterproof tapes of said fastener stringers.


5. The seal structure according to claim 4, wherein said waterproof sheet is a cruciform sheet made of a silicone resin.

20 6. A seal structure for a T-shaped joint formed by first and second cladding units arranged as mutually adjoined and a third cladding unit arranged astraddle said two adjoining cladding units, all cladding units being attached to a backing member of a building;

25 said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of

This Sheet Has Been Replaced





said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said
5 waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

a first joint between said first and second cladding units
10 being sealed by coupling the engaging parts of opposed fastener stringers of said adjoining first and second cladding units, a second joint between said first and third cladding units and a third joint between said second and third cladding units being severally sealed by coupling the engaging parts of said
15 fastener stringers of said first and second cladding units to the opposite engaging part of said fastener stringer of said third cladding unit; and

said T-shaped joint due to the intersection of said first, second, and third joints having a waterproof sheet disposed as
20 tightly attached over joined corner parts of said waterproof tapes of said fastener stringers.

7. The seal structure according to claim 6, wherein said waterproof sheet is a T-shaped sheet made of a silicone resin.

8. The seal structure according to claim 6 or 7, wherein
25 the fastener stringer of said third cladding unit has a notch positioned in the intersection of said first, second, and third joints.

9. A seal structure for an end-part joint between a wall

This Sheet Has Been Replaced





in an opening of the building and end parts of first and second cladding units attached as mutually adjoined to a backing member of said building,

5 said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework, at least one waterproof tape attached to an outer lateral part of said cladding member to be opposed to the wall in the opening of the building, and fastener stringers of a waterproof slide fastener attached severally to remaining
10 outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said waterproof tapes being
15 integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

the end parts of opposed fastener stringers of said first and second cladding units being extended to end parts of the
20 waterproof tapes opposed to said wall in the opening of said building and joined integrally to the end parts of the waterproof tapes;

a joint between said first and second cladding units being sealed by coupling the engaging parts of opposed fastener
25 stringers of said first and second cladding units;

said waterproof tapes opposed to said wall in the opening of said building and said extended parts of said coupled fastener stringers being bent so that the bent parts are

This Sheet Has Been Replaced





opposed to said wall in the opening of said building; and

the gap between said wall in the opening of said building and said bent parts of said waterproof tapes and coupled fastener stringers being sealed by filling said gap with a wet
5 sealing material.

10. The seal structure according to claim 9, wherein said waterproof tape attached to said cladding member is replaced by said fastener stringer.

11. A seal structure for an end-part joint between a wall
10 in an opening of a building and end parts of first and second cladding units attached as mutually adjoined to a backing member of said building,

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side
15 face of the framework, at least one waterproof tape attached to an outer lateral part of said cladding member to be opposed to the wall in the opening of the building, and fastener stringers of a waterproof slide fastener attached severally to remaining outer lateral parts of said cladding member, said fastener
20 stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said adjoining waterproof tapes being integrally connected, and joined corner parts of said
25 waterproof tapes protruding outwardly from the corner parts of said framework;

a joint between said first and second cladding units being sealed by coupling the engaging parts of opposed fastener

This Sheet Has Been Replaced





stringers of said first and second cladding units;

those of said waterproof tapes of said first and second cladding units that are opposed to said wall in the opening of said building being bent so that the bent parts are opposed to
5 said wall in the opening of said building;

a waterproof sheet being disposed as tightly attached to at least end parts of opposed fastener stringers of said first and second cladding units adjoining said waterproof tapes and
of said waterproof tapes; and


10 the gap between said wall in the opening of said building and said waterproof tapes and said waterproof sheet being sealed by filling said gap with a wet sealing material.

12. The seal structure according to claim 11, wherein said waterproof tape attached to said cladding member is
15 replaced by said fastener stringer.

13. A seal structure for a joint to be formed where an obstacle thrusts out from between a first and a second cladding unit attached as mutually adjoined to a backing member of a building,

20 said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of said cladding member, said fastener stringers each comprising a
25 waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said adjoining waterproof tapes being integrally connected, and

This Sheet Has Been Replaced





- 34 -

joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

said first and second cladding units each having a depressed part jointly conforming to the contour of said
5 obstacle and being provided on the opposite parts thereof across said depressed parts with fastener stringers having the continuity thereof interrupted in said depressed part;

waterproof tapes being attached to surfaces of said depressed parts;

10 said waterproof tapes being bent so that the bent parts are opposed to said obstacle;

said waterproof tapes in said depressed parts being joined to end parts of the waterproof tapes of said fastener stringers;

joints on the opposite sides across said obstacle as a
15 boundary being severally sealed by coupling the engaging parts of said opposed fastener stringers attached to said first and second cladding units; and

gaps between said obstacle and end parts of said connected fastener stringers and said waterproof tapes in said depressed
20 parts being sealed by filling said gaps with a wet sealing material.

This Sheet Has Been Replaced



ABSTRACT OF THE DISCLOSURE


Cladding units (5) for a building (1) and a seal structure for the joints thereof are disclosed. A cladding unit (5) comprises a cladding member (15) comprised of a framework (13) and a face member (14) attached to one side face thereof and fastener stringers (16) for a waterproof slide fastener attached one each to the outer lateral parts of the cladding member (15), the fastener stringers (16) each comprising a waterproof tape (17) and an engaging part (18) provided with a multiplicity of coupling elements (19) attached to the waterproof tape (17) as spaced at fixed intervals along one longitudinal edge thereof, the end parts of the waterproof tapes (17) of all adjoining fastener stringers (16) being integrally joined, and the joined corner parts (17b) of the waterproof tapes (17) protruding from the corner parts of the framework (13). The joint formed between the adjoining cladding units (5) is sealed by coupling the engaging parts (18) of the opposed fastener stringers (16) of the cladding units (5). The gaps formed between the end parts of the fastener stringers are sealed by attaching the relevant waterproof sheets (32, 35, 43) through the medium of an adhesive agent (33, 36) or by means of thermal welding to the joined corner parts (17b) of the waterproof tapes (17) of the fastener stringers (16) protruding from the corner parts of the frameworks (13) of the cladding units (5).

(Fig. 2)

This Sheet Has Been Replaced




FIG. 1

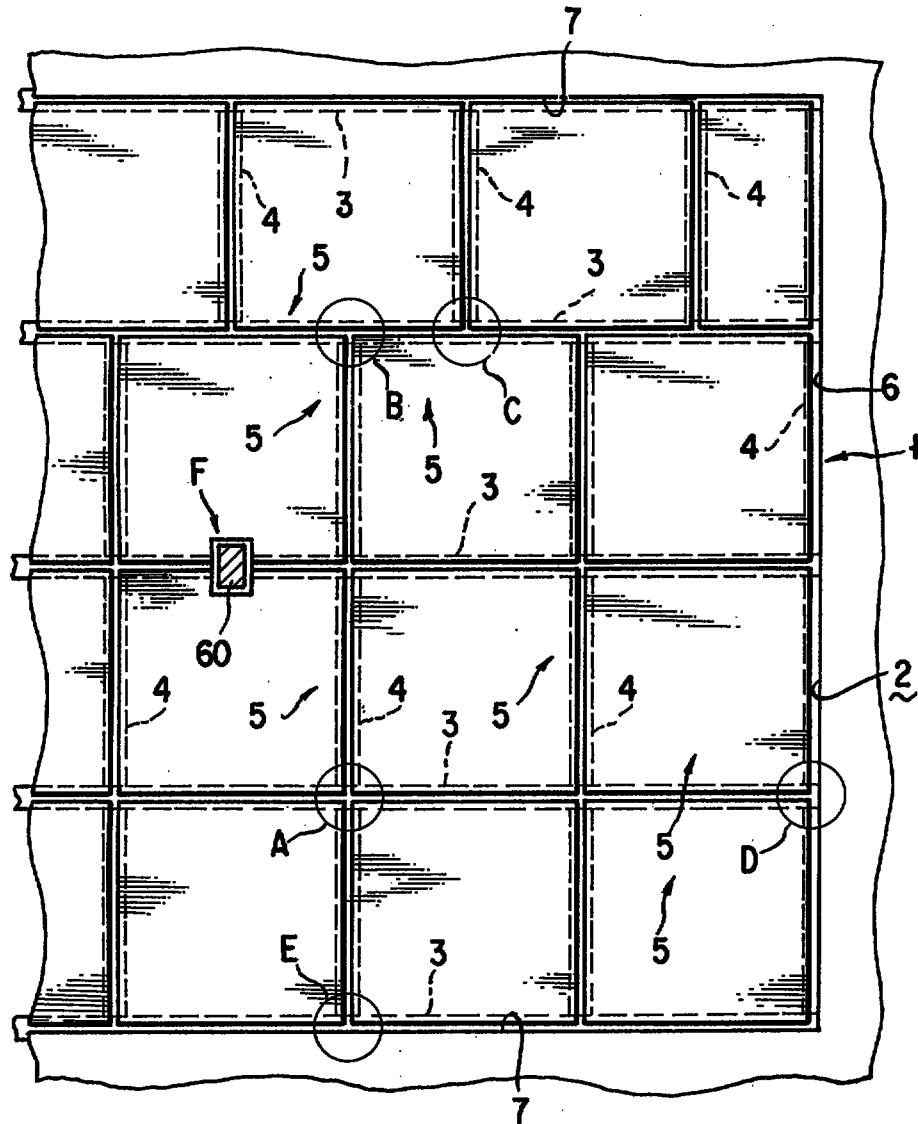

This Sheet Has Been Replaced




FIG. 2

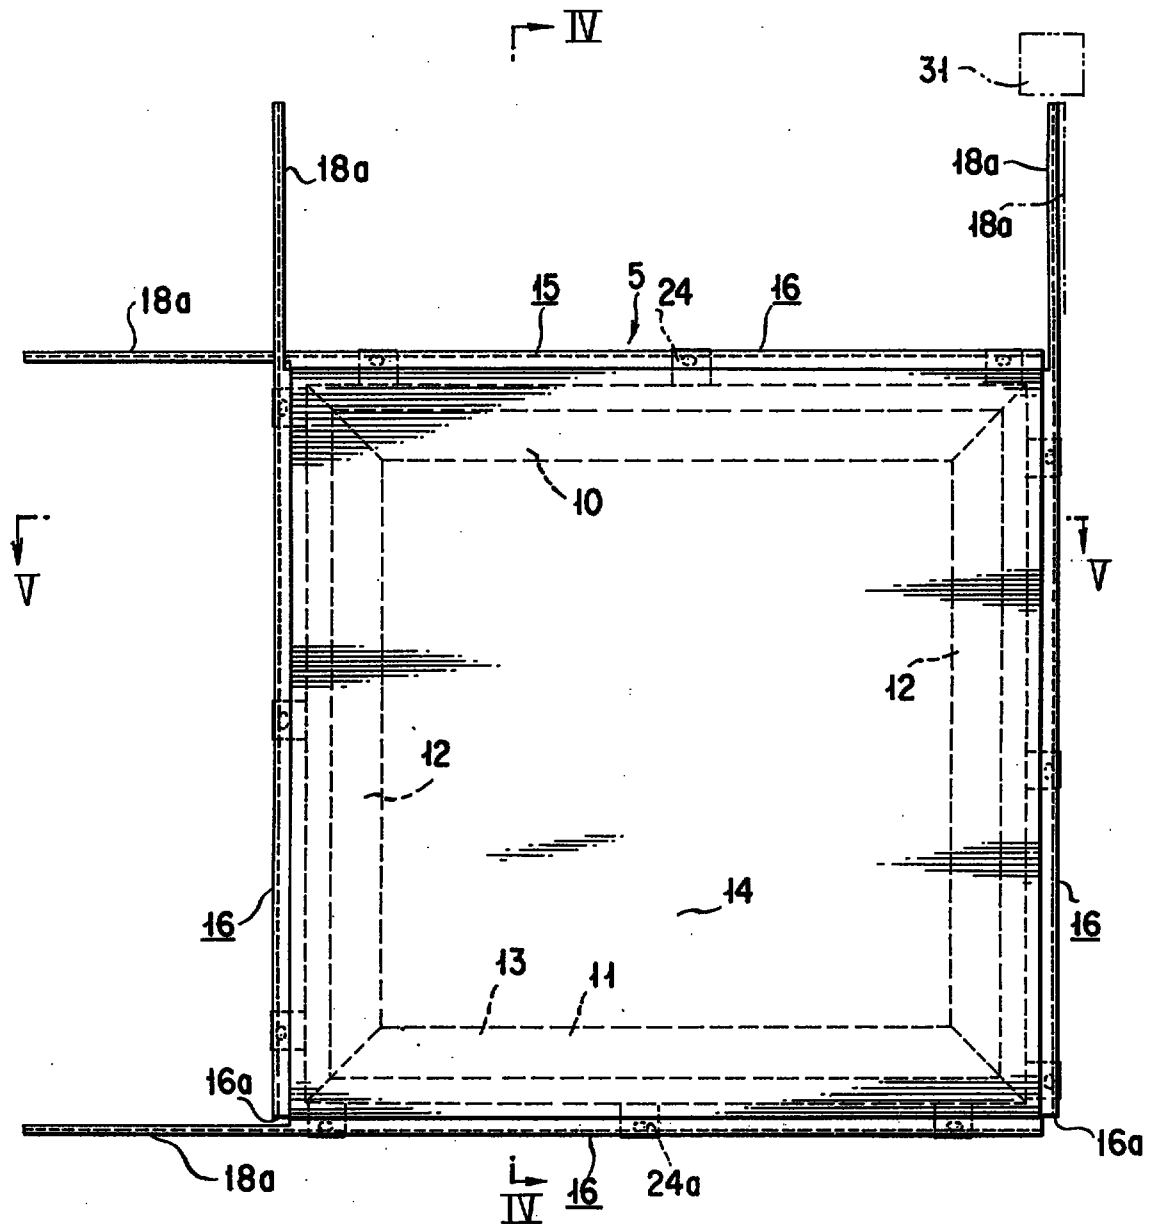

This Sheet Has Been Replaced




FIG. 3

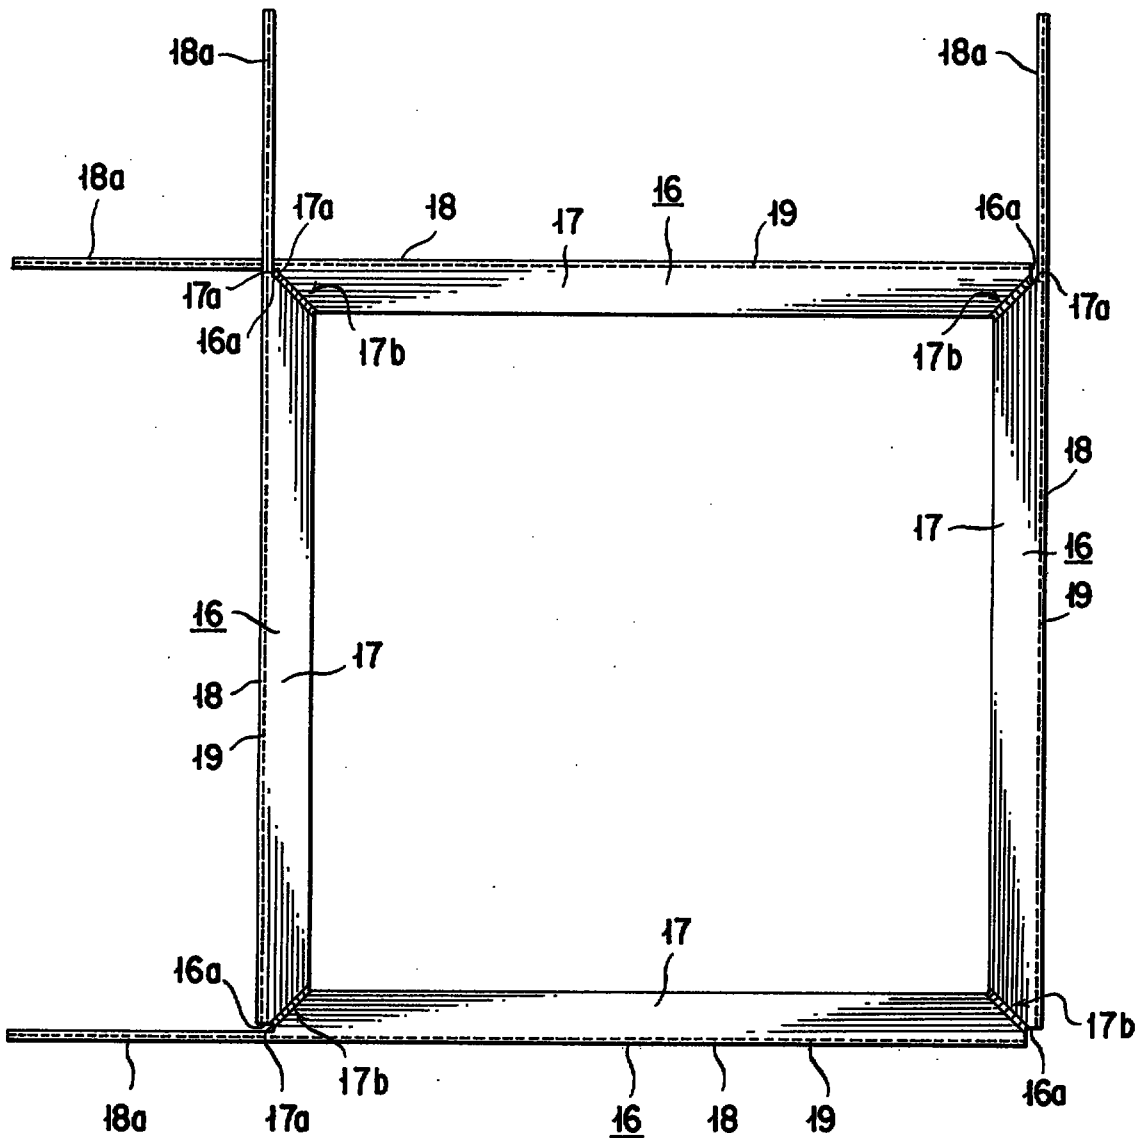

This Sheet Has Been Replaced




FIG. 4

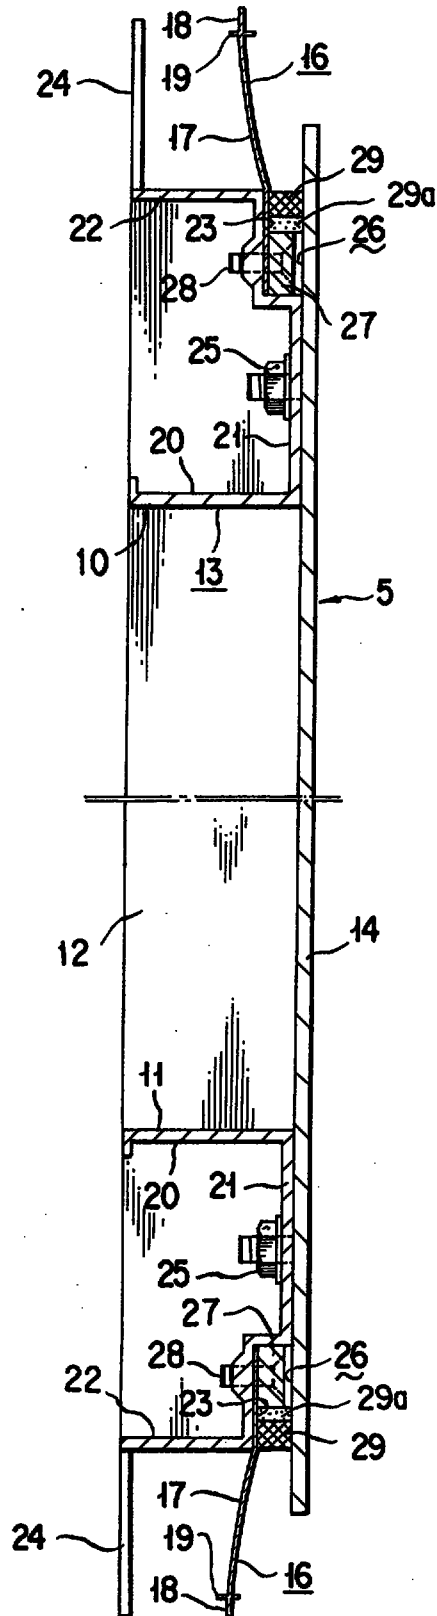

This Sheet Has Been Replaced




FIG. 5

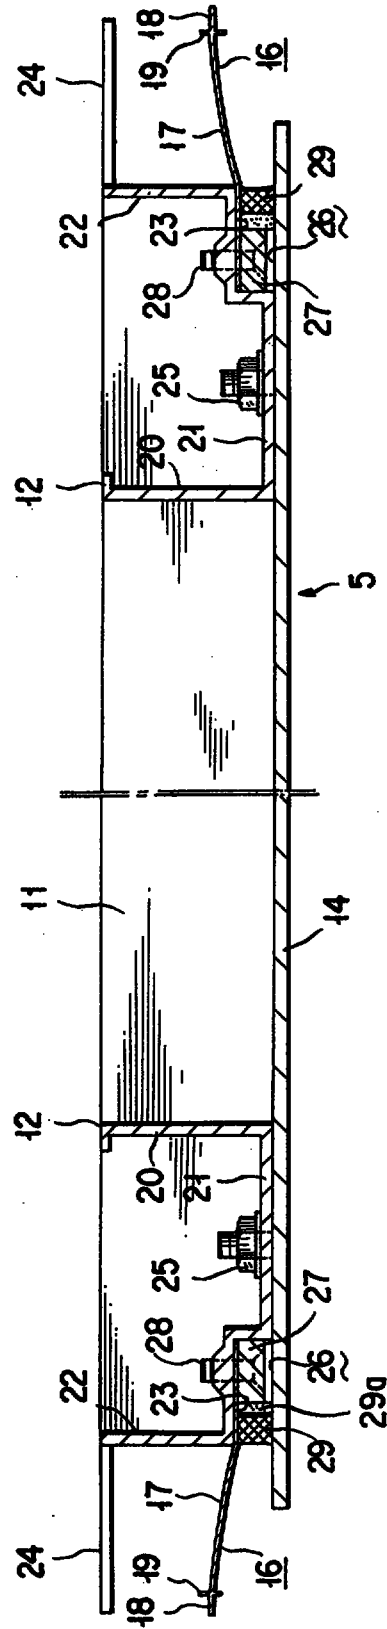

This Sheet Has Been Replaced




FIG. 6

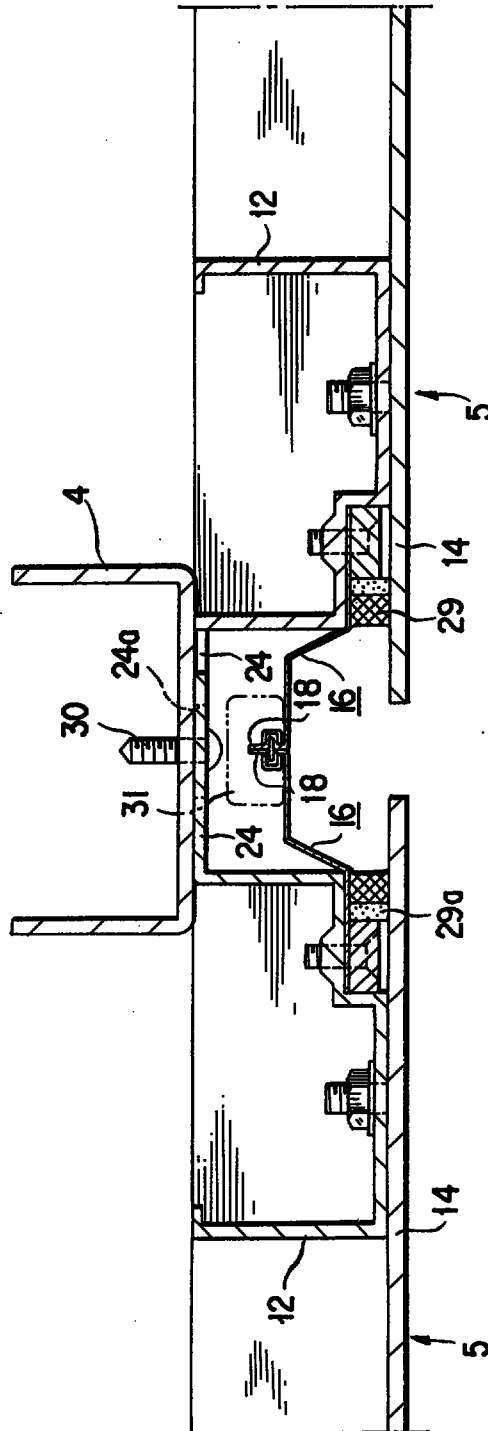

This Sheet Has Been Replaced




FIG. 7

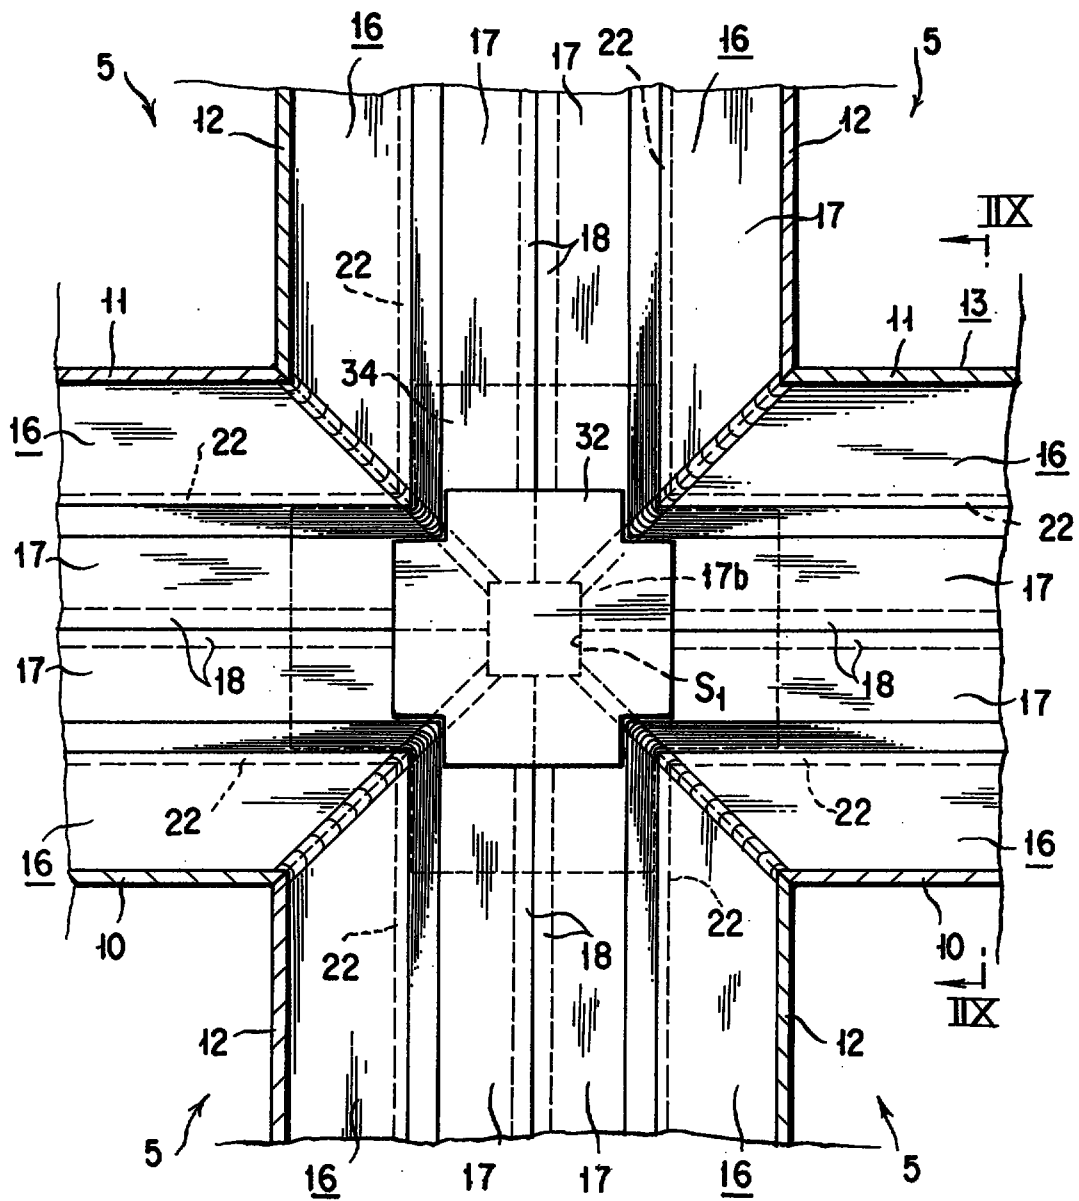

This Sheet Has Been Replaced




FIG. 8

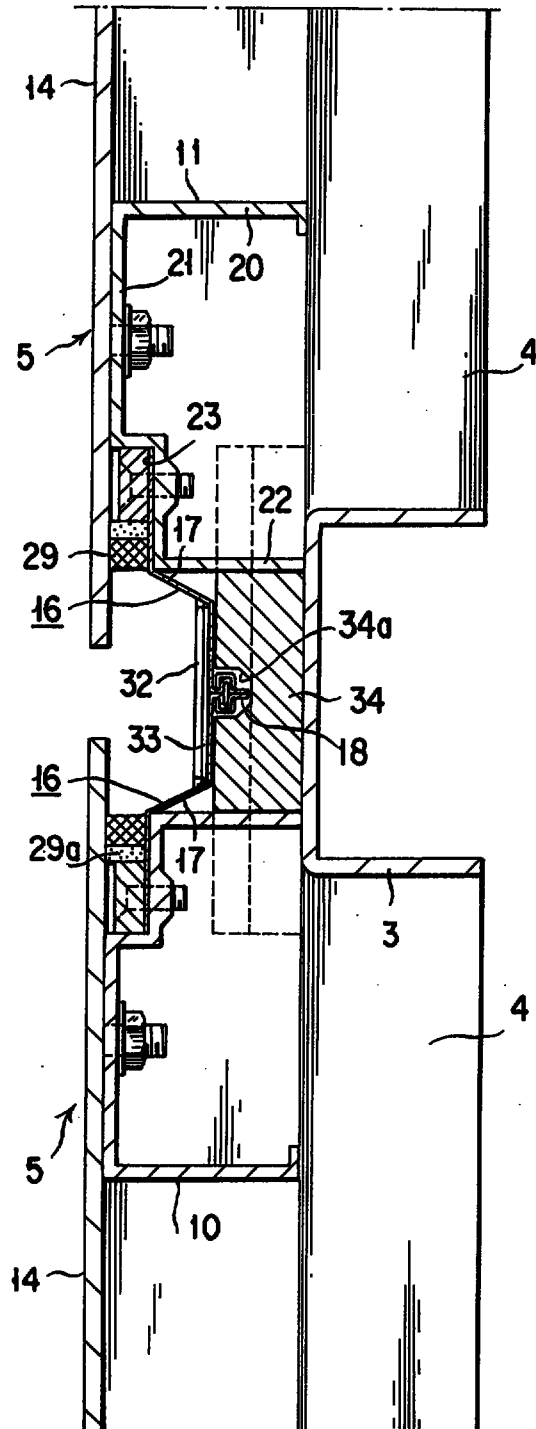

This Sheet Has Been Replaced




FIG. 9

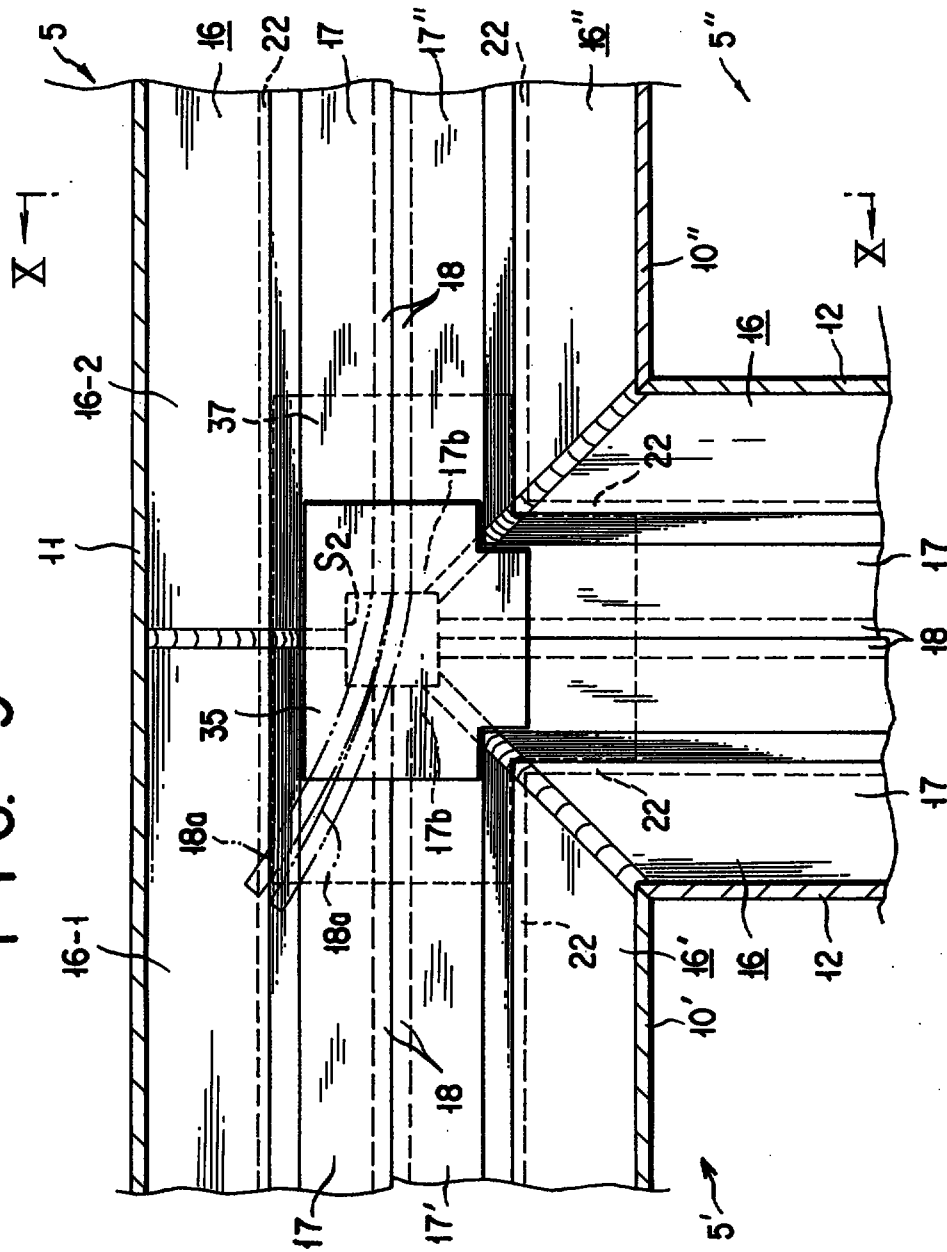

This Sheet Has Been Replaced




FIG. 10

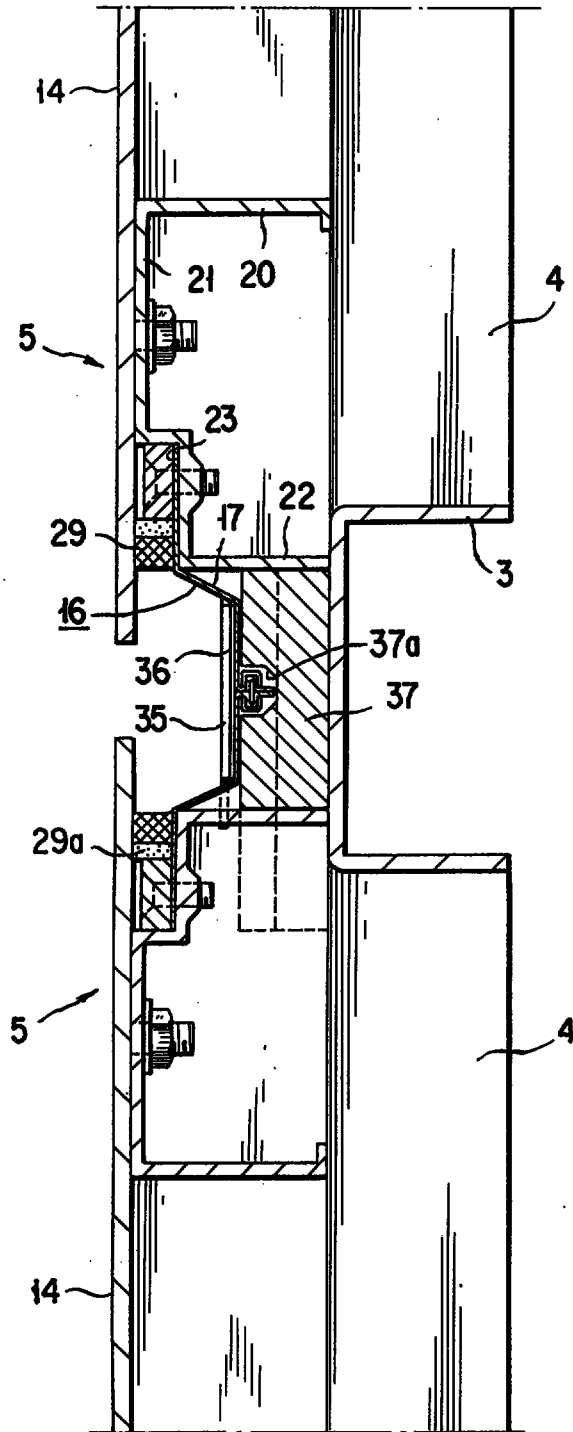

This Sheet Has Been Replaced




FIG. 11

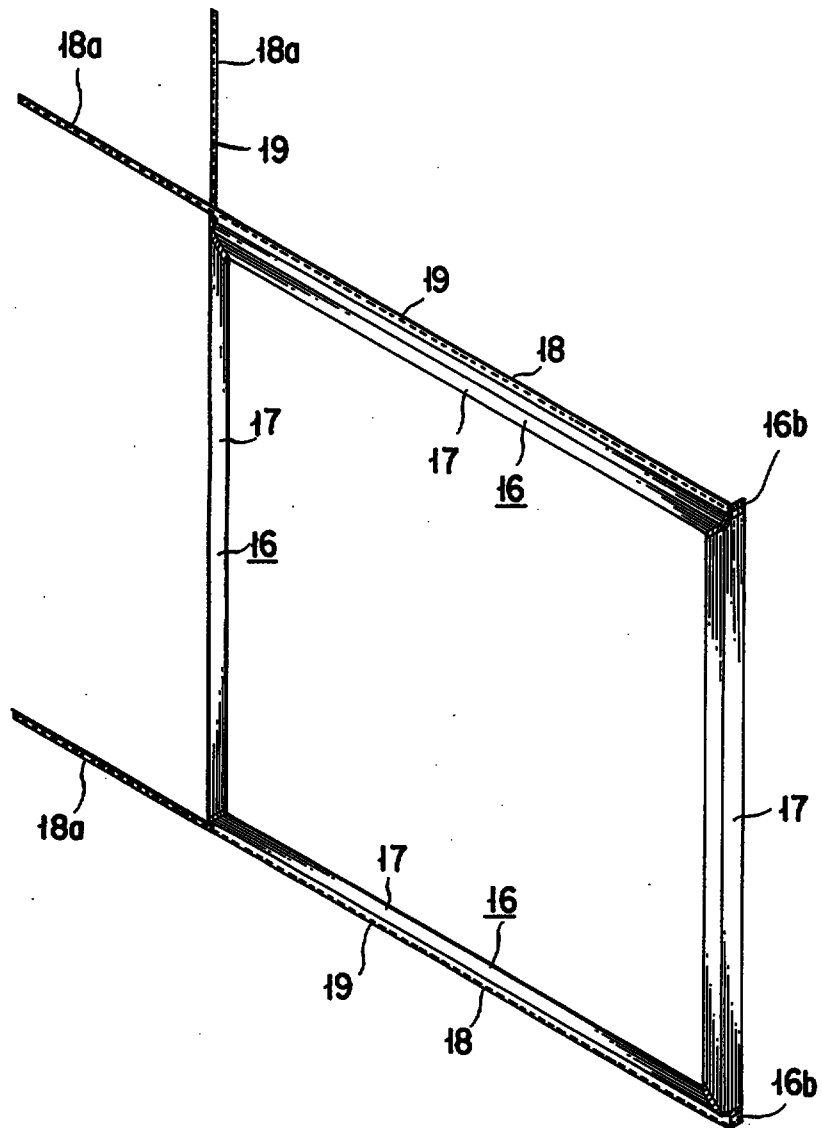

This Sheet Has Been Replaced




FIG. 12

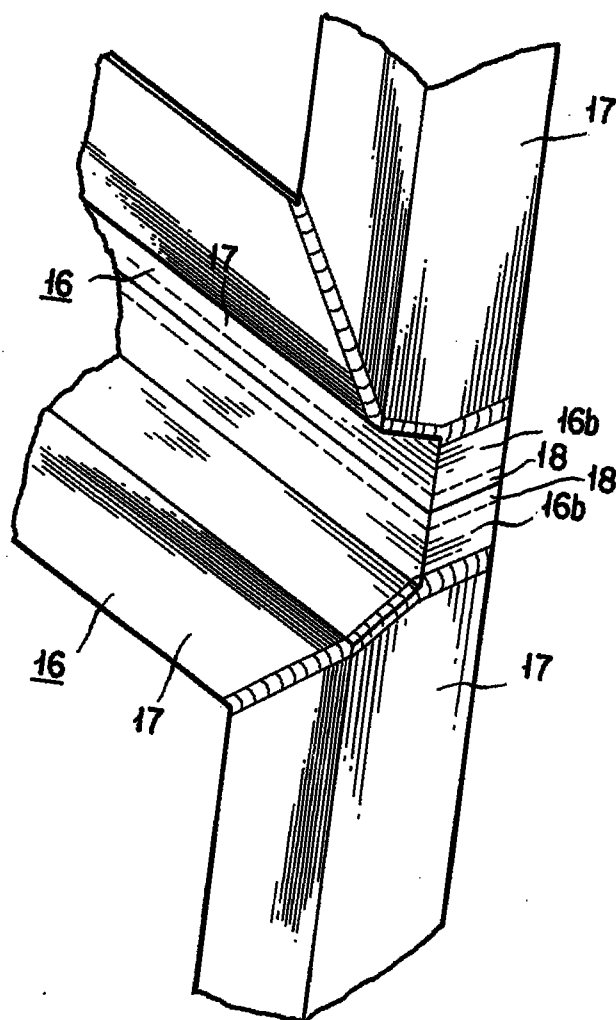

This Sheet Has Been Replaced




FIG. 13

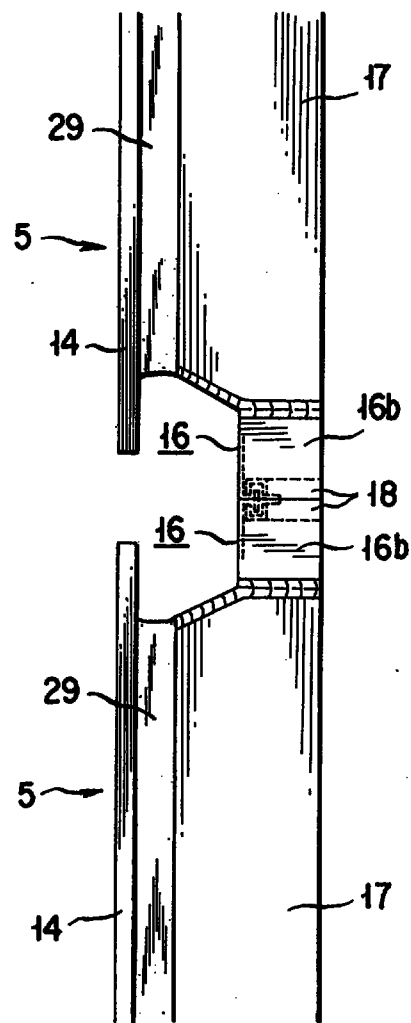

This Sheet Has Been Replaced




FIG. 14

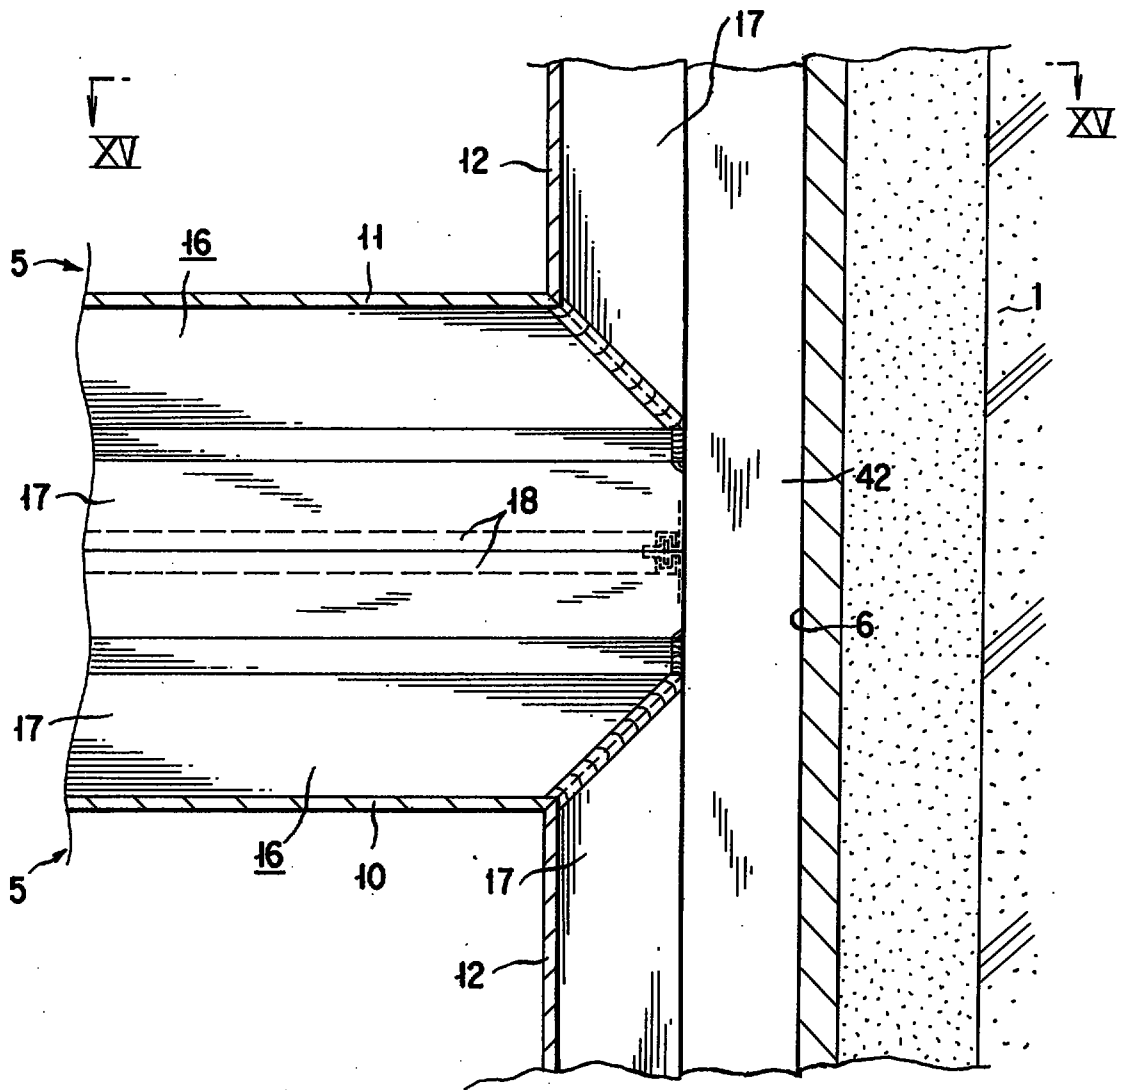

This Sheet Has Been Replaced




FIG. 15

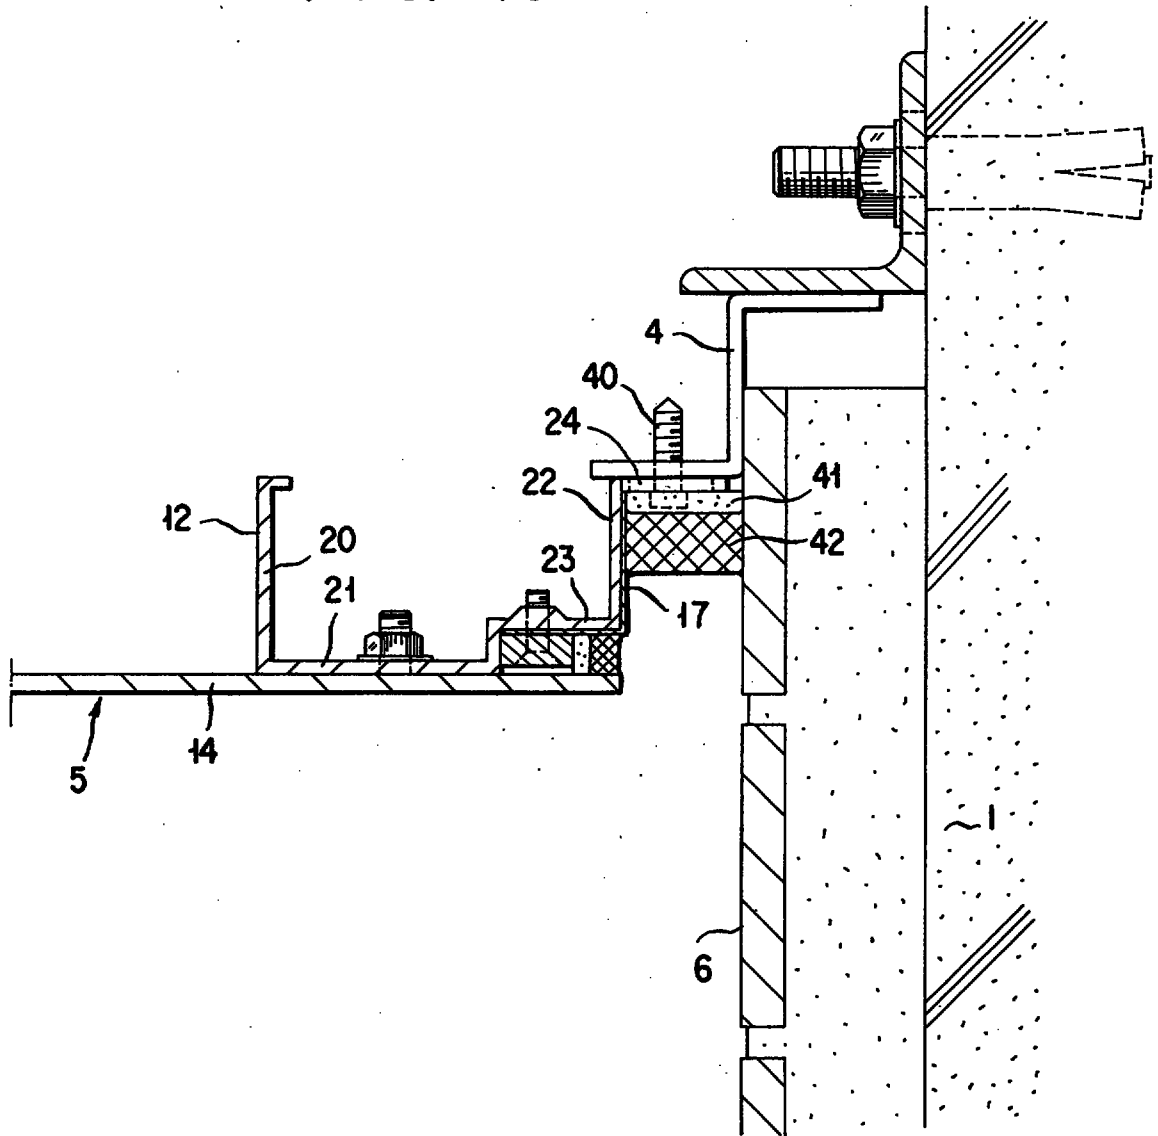

This Sheet Has Been Replaced




FIG. 16

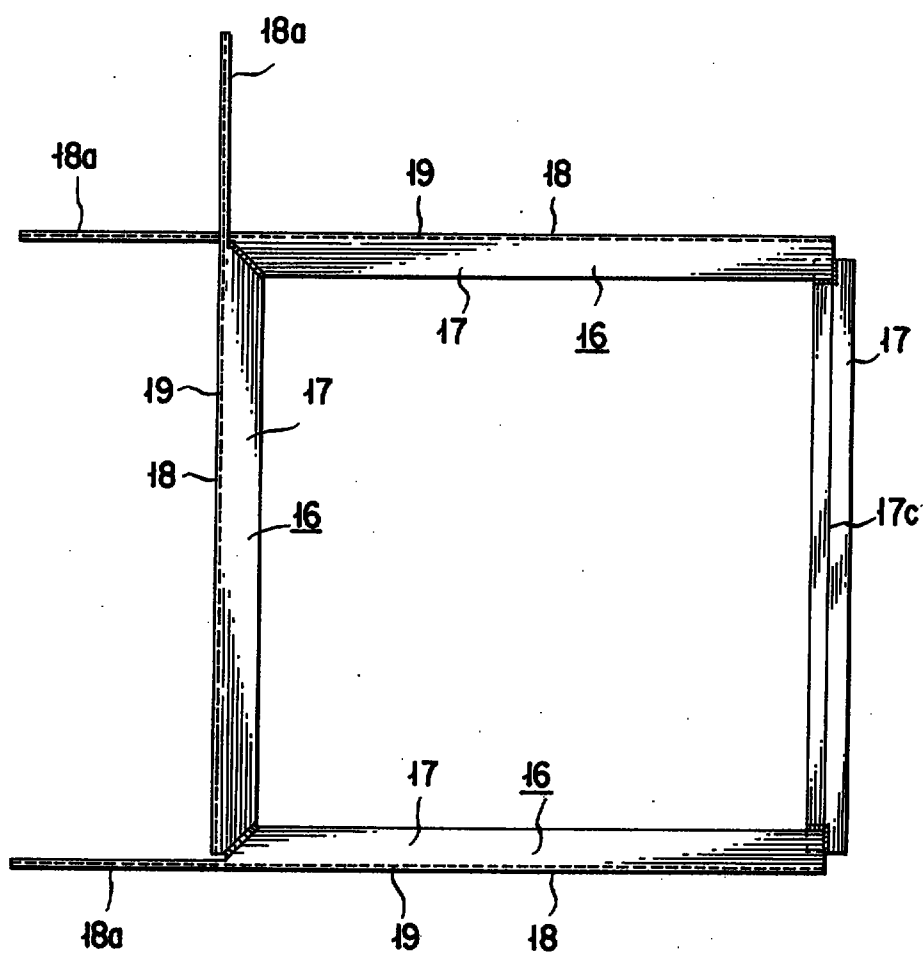

This Sheet Has Been Replaced




FIG. 17

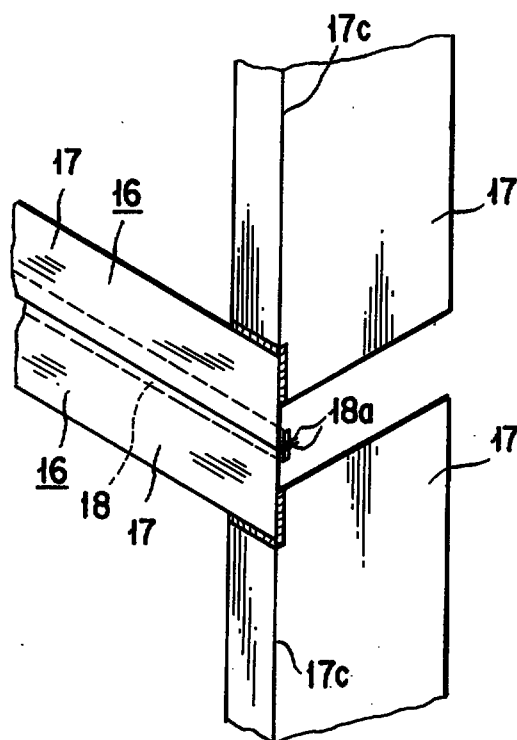

This Sheet Has Been Replaced




FIG. 18

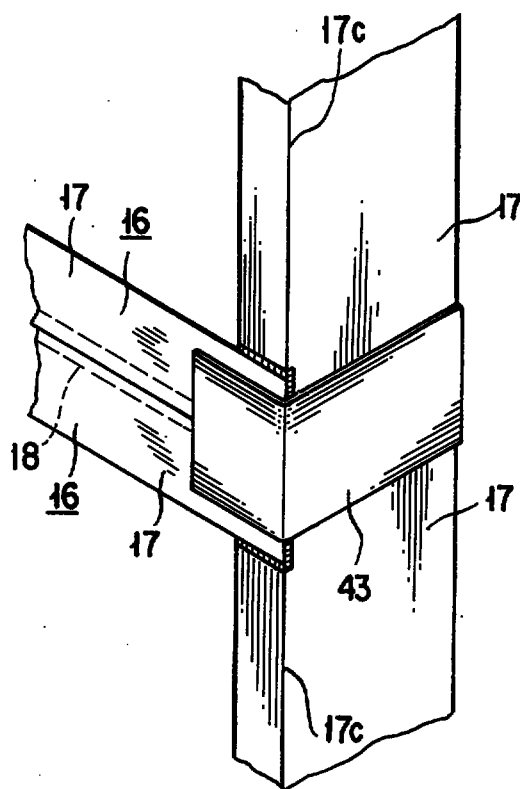

This Sheet Has Been Replaced




FIG. 19

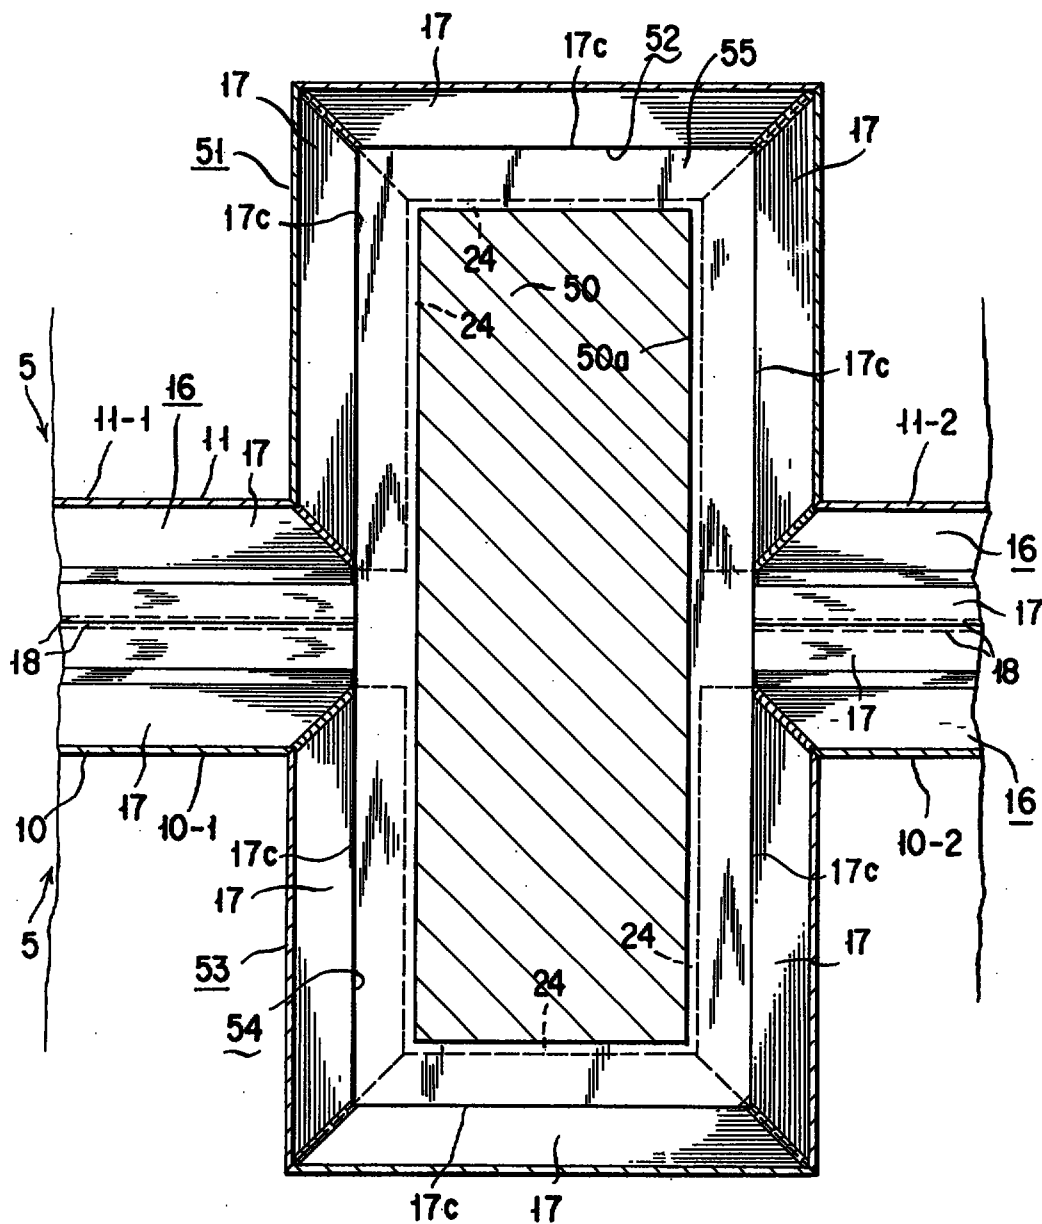

This Sheet Has Been Replaced




FIG. 20

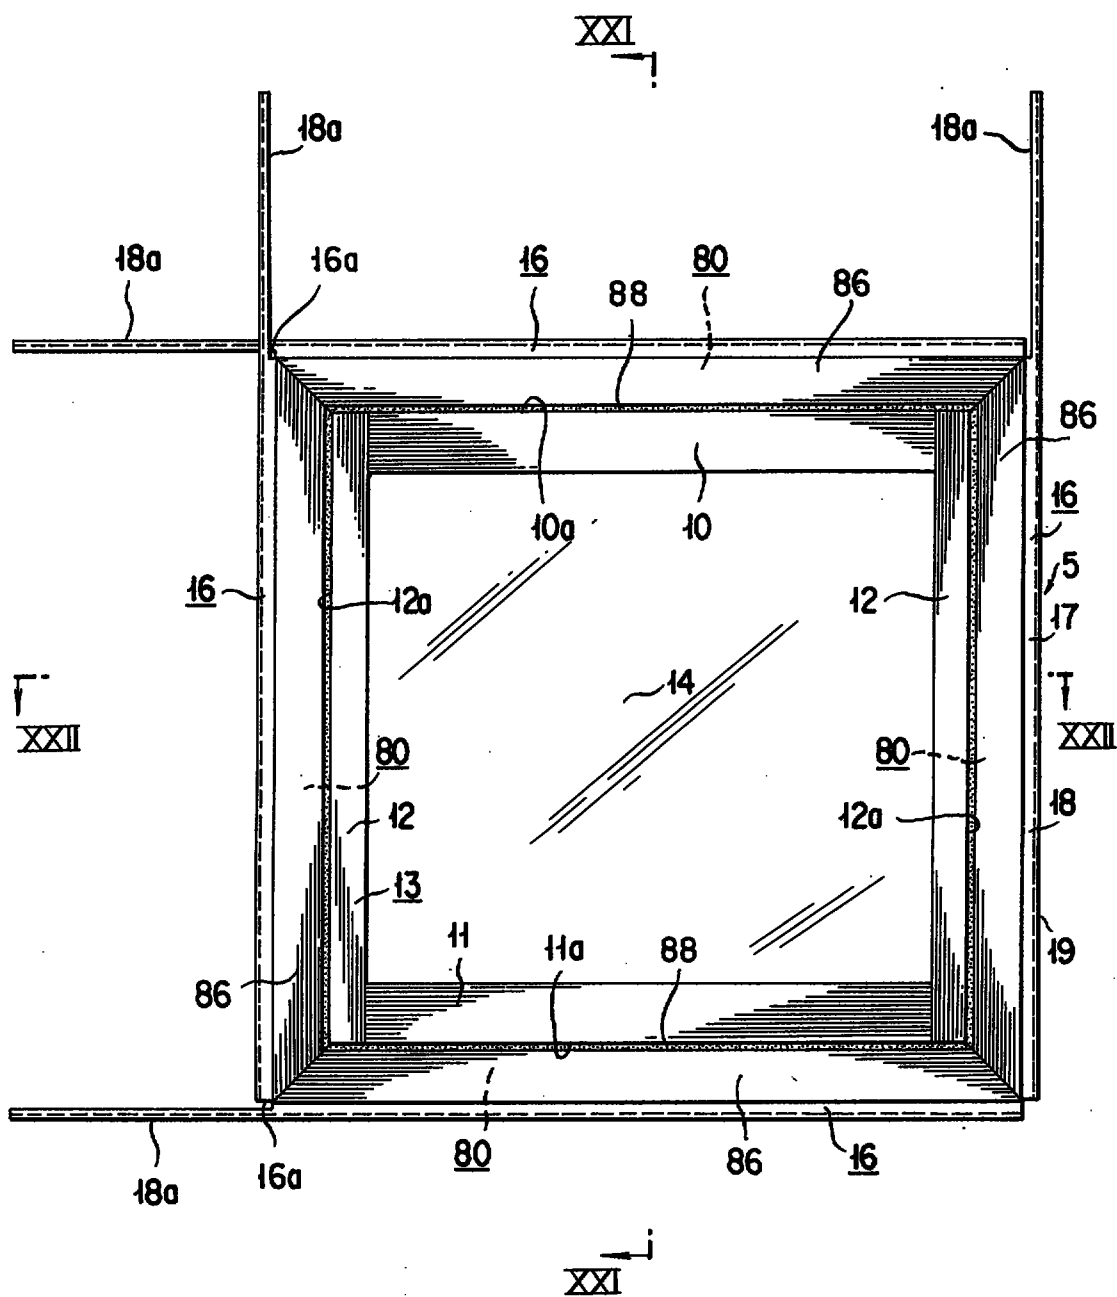

This Sheet Has Been Replaced




FIG. 21

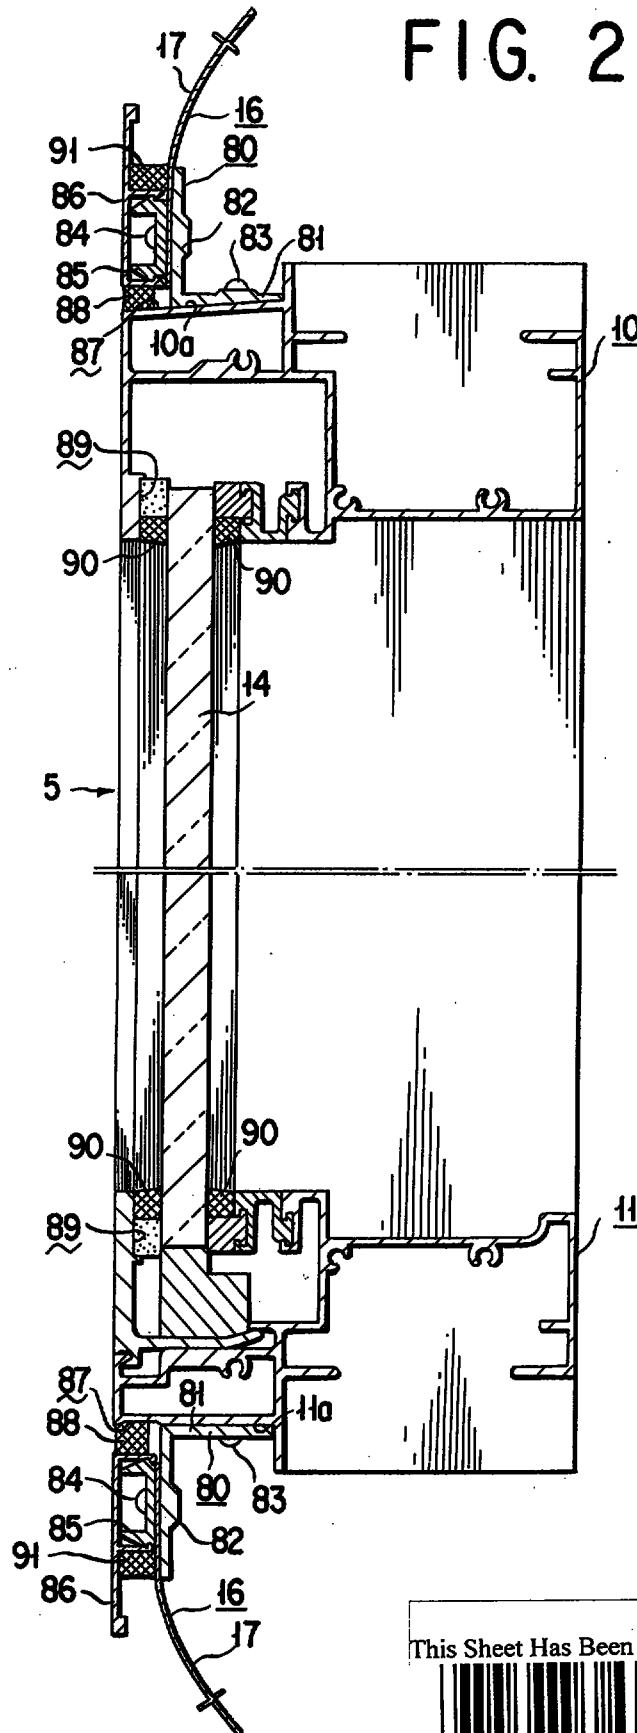

This Sheet Has Been Replaced



FIG. 22

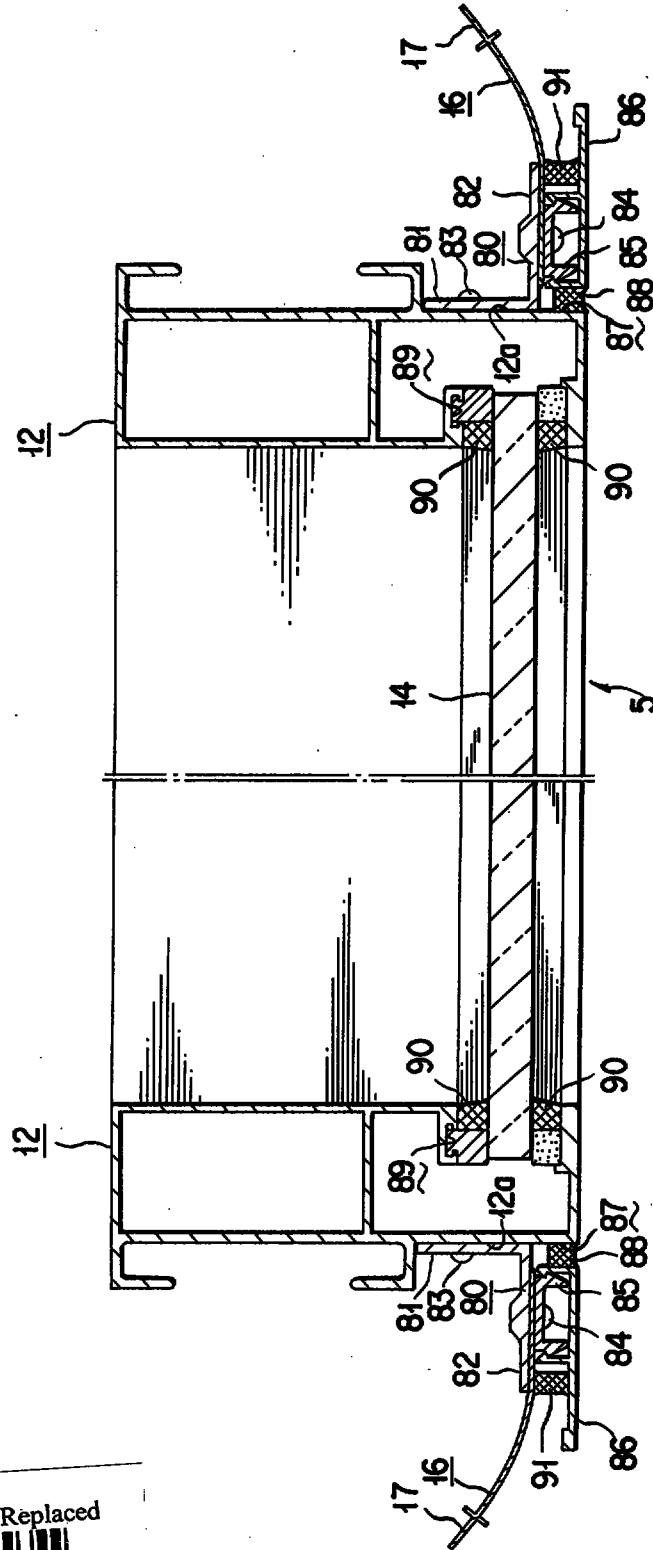

This Sheet Has Been Replaced



FIG. 23


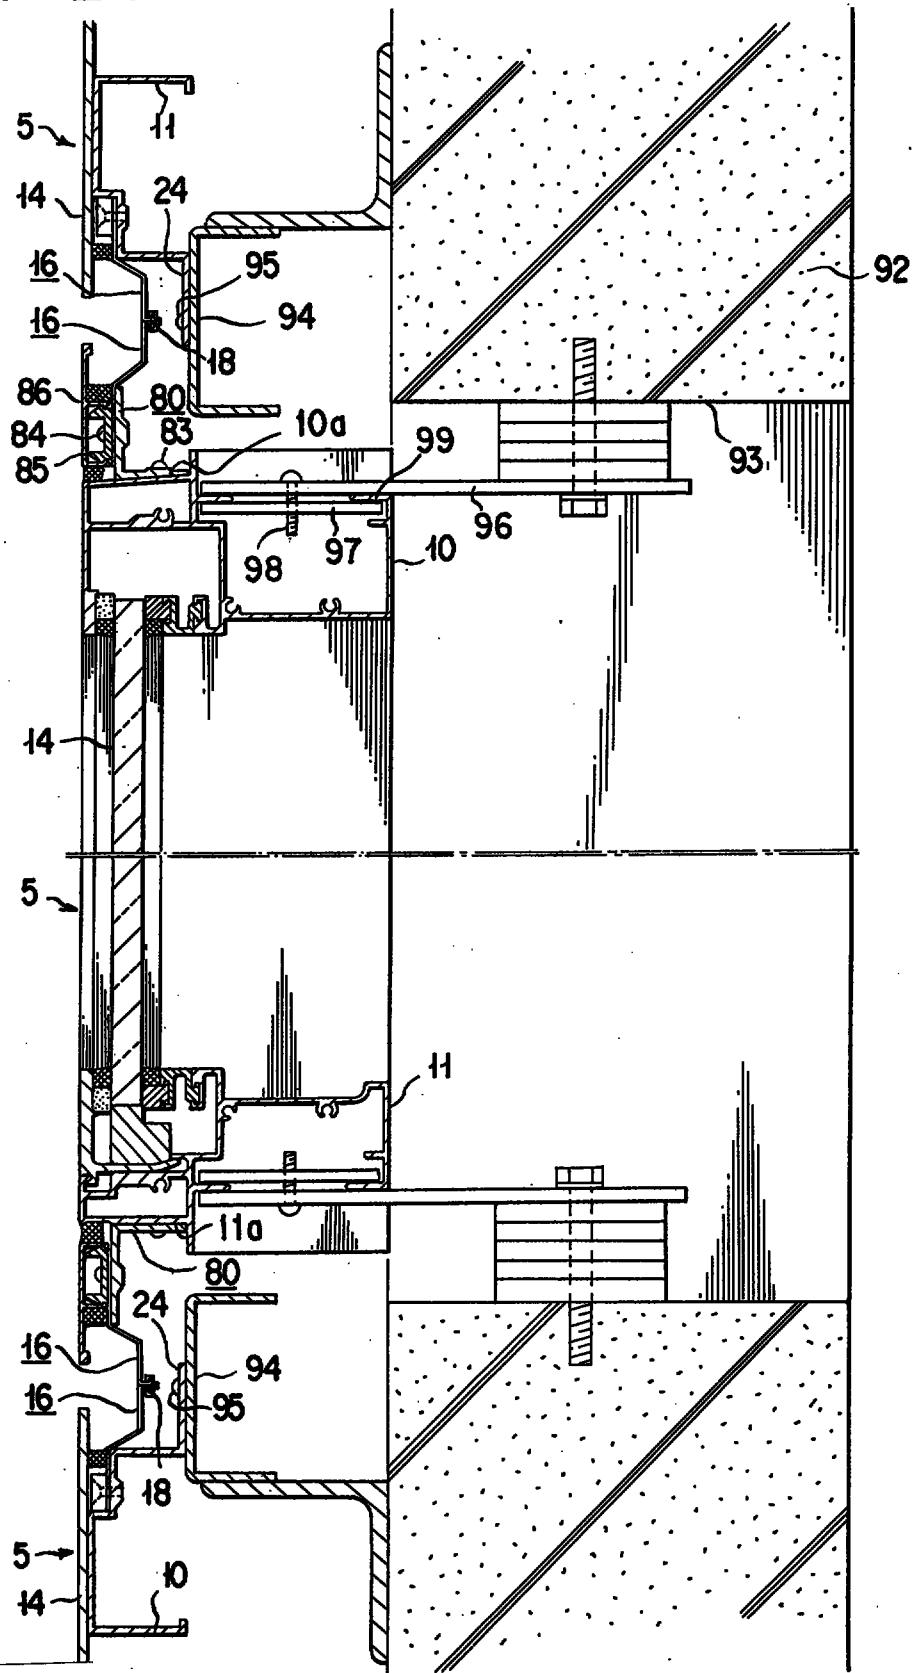



FIG. 24

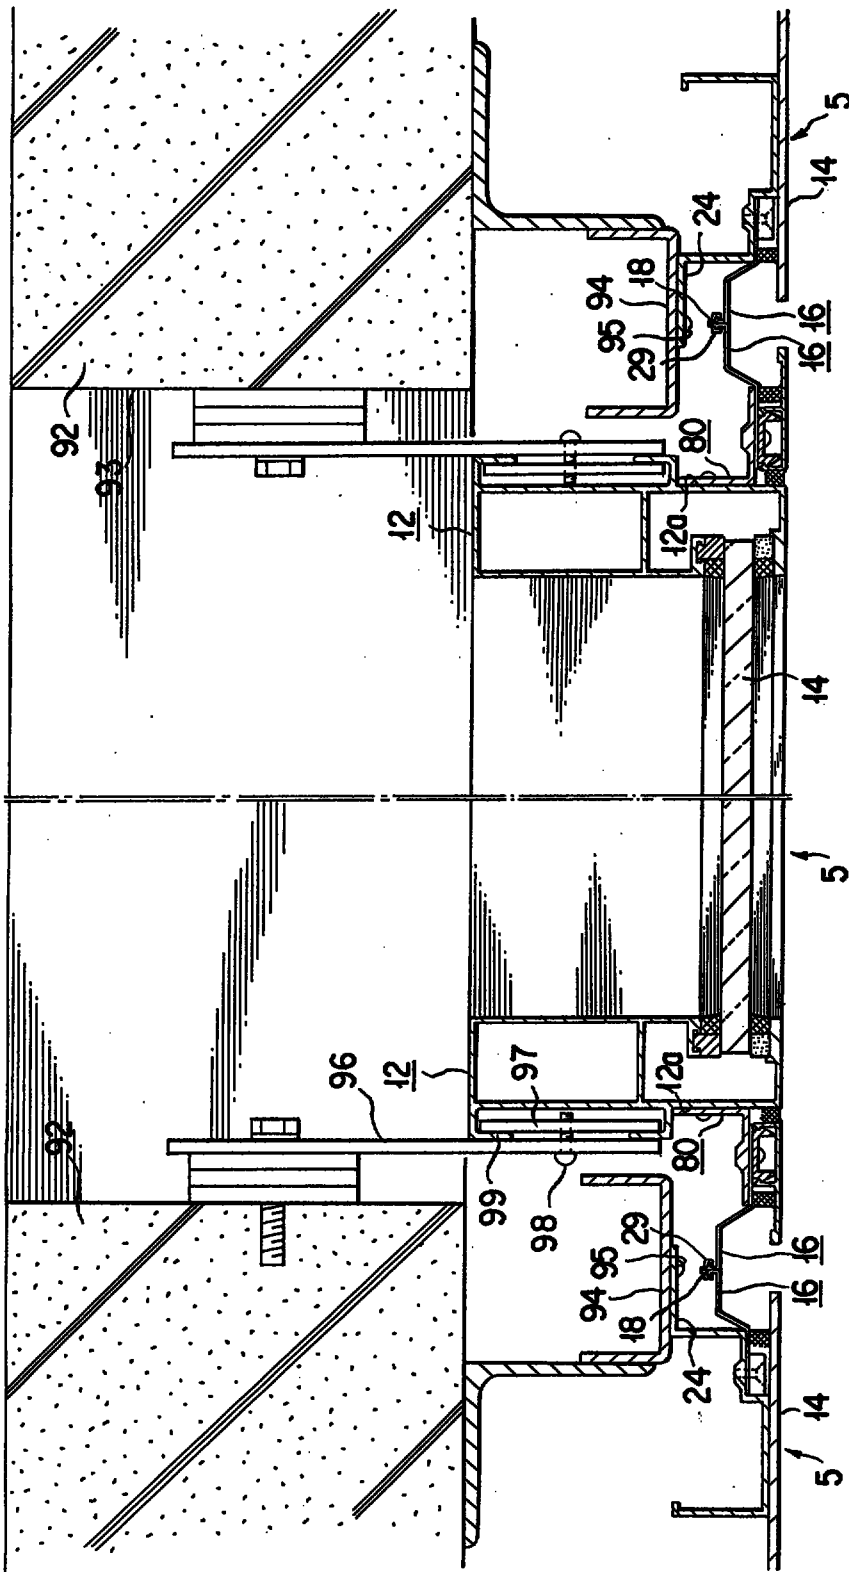

This Sheet Has Been Replaced




FIG. 25

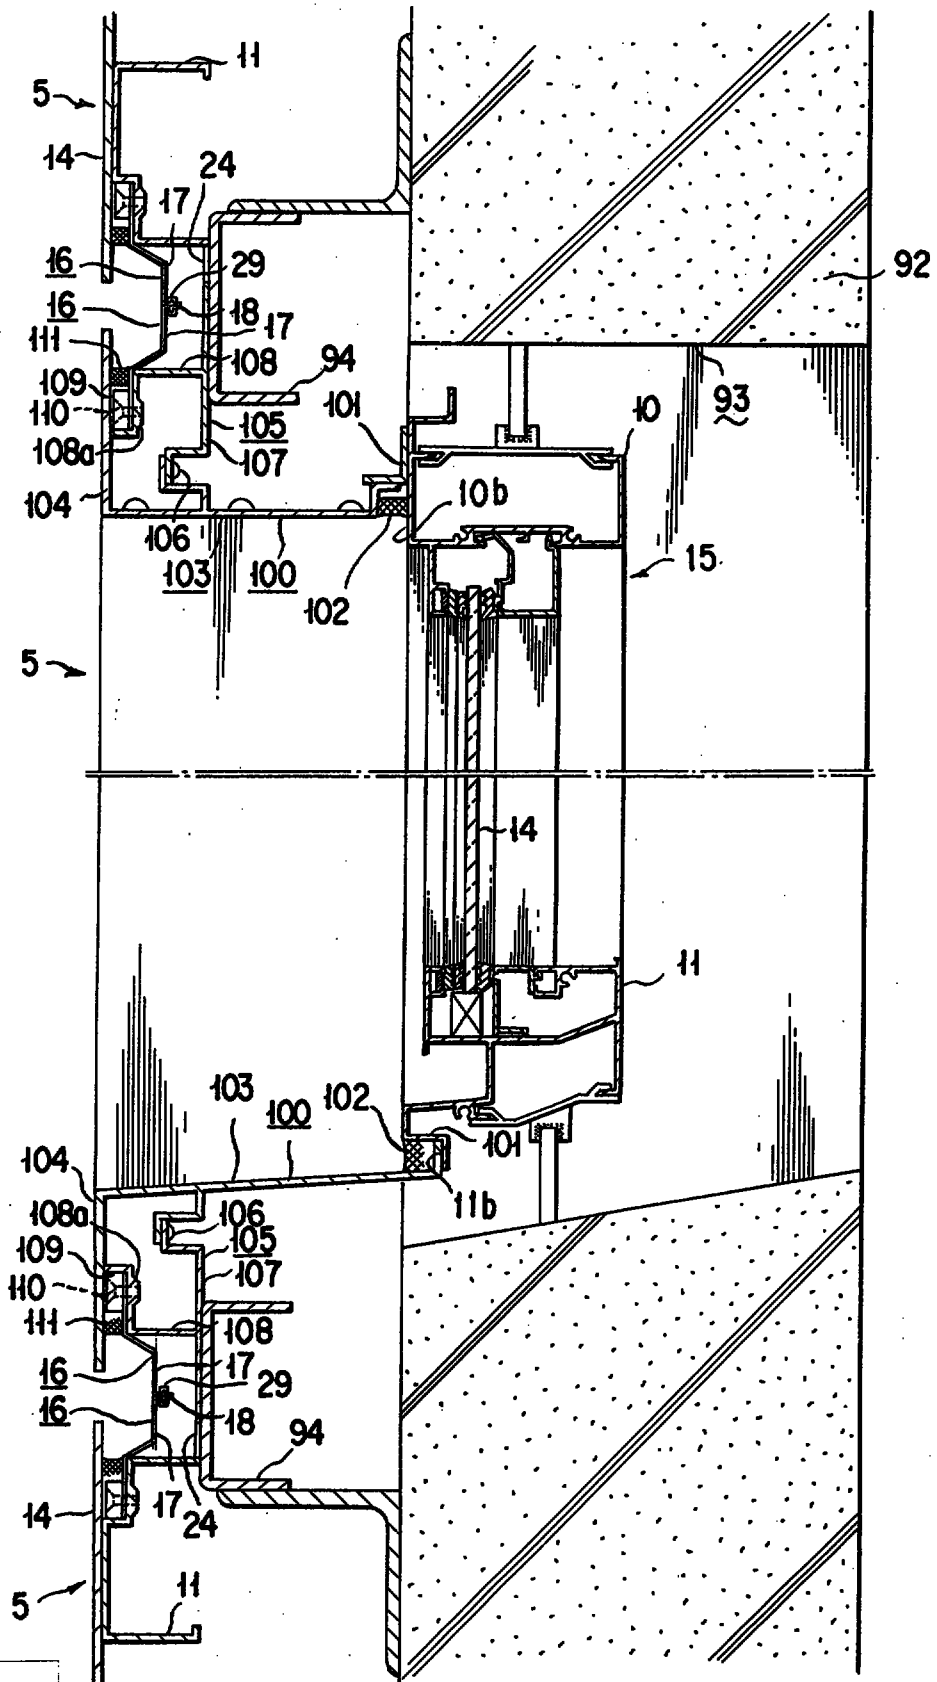

This Sheet Has Been Replaced



FIG. 26

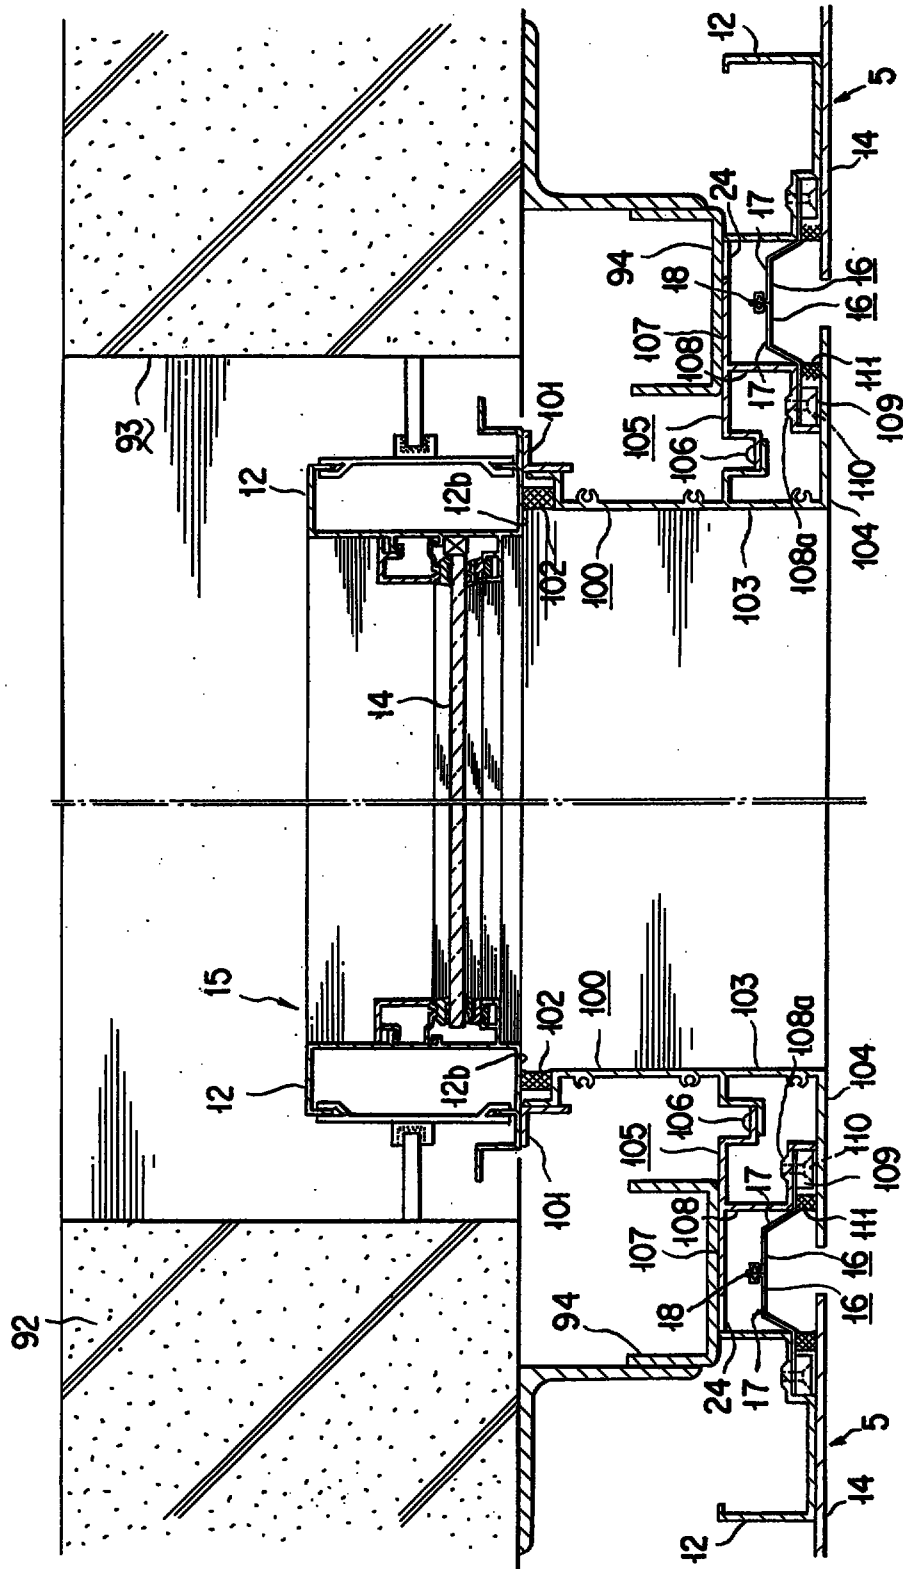

This Sheet Has Been Replaced.



REPLACEMENT SHEETS		SG
☒	Description : paged 1 to paged 27	
☒	Claim(s) : paged 28 to paged 34	
☒	Drawing(s) : paged 1 to paged 26	
☒	Abstract : paged 35 to paged 35	
DATE OF RECEIPT		18 MAR 1997

- 1 -

CLADDING UNITS FOR BUILDING AND SEAL STRUCTURE FOR JOINT THEREOF

BACKGROUND OF THE INVENTION

1. Field of the Invention:

This invention relates to cladding units or facing units for forming the outer wall of a building and a structure for sealing a joint between adjoining cladding units.

2. Description of the Prior Art:

As one form of the outer wall of a building, the unit type curtain wall that is formed by joining curtain walls side by side vertically and laterally as attached to the skeleton frame of a building is known. Generally, the curtain wall units each comprise a framework, a panel or screen fitted to the framework, and a dry seal member fitted to the perimeter of the framework.

When the curtain wall units mentioned above are attached as vertically and laterally adjoined to one another to the skeleton frame of a given building, the seal members of these adjoining curtain wall units are pressed against one another and the joints consequently formed therebetween are sealed. It is, however, very difficult to press the seal members correctly against one another. Even when they are correctly pressed, the joints are not always sealed fully effectively. Usually, therefore, the joints between the adjoining curtain wall units are sealed by filling the joints with a wet sealing material. This work of filling the joints with the wet sealing material turns out to be very irksome.

SUMMARY OF THE INVENTION

REPLACEMENT SHEET
18 MAR 1997

REPLACED SHEETS		SG
☒	Description : paged 1 to paged 5	
☒	Claim(s) : paged 28 to paged 34	
☐	Drawing(s) : paged 1 to paged 26	
☒	Abstract : paged 35 to paged 35	

18 MAR 1997

- 2 -

It is, therefore, an object of the present invention to provide cladding units or facing units and a seal structure for the joints thereof which are liberated from the problems mentioned above.

In accordance with one aspect of the present invention, there is provided a cladding unit which comprises a cladding member comprised of a framework and a face member attached to one side face thereof and fastener stringers for a waterproof slide fastener attached one each to the outer lateral parts of the cladding member, the fastener stringers mentioned above each comprising a waterproof tape and an engaging part provided with a multiplicity of coupling elements attached to the waterproof tape as spaced at fixed intervals along one longitudinal edge thereof, the end parts of the waterproof tapes of all adjoining fastener stringers being integrally joined, and the joined corner parts of the waterproof tapes protruding from the corner parts of the framework. According to this structure, the joint between two adjoining cladding units can be infallibly sealed by uniting the opposed fastener stringers of the cladding units with a slider and the gap between the framework and each of the fastener strings can be sealed so securely as to prevent rainwater from leaking through the corner parts of the framework.

In a preferred mode of this aspect of the invention, the engaging part of the fastener stringers mentioned above is so formed that one end part thereof will protrude from one end part of the waterproof tape in the direction of length thereof. When the opposed fastener stringers of the adjoining

This Sheet Has Been Replaced



18 MAR 1997

- 3 -

cladding units are to be united, therefore, the insertion thereof into a slider is facilitated because the relevant engaging parts protruding on one end side thereof from the corresponding waterproof tapes can be drawn out from between the adjoining cladding units and inserted into the slide groove of the slider.

Another aspect of the present invention consists in providing a seal structure for the joint to be formed between the opposed frameworks of the cladding units mutually adjoined and attached to the backing member of the building.

In a basic mode of this aspect of the invention, the joint formed between the adjoining cladding units is sealed by coupling the engaging parts of the opposed fastener stringers of the cladding units. The gaps formed between the end parts of the fastener stringers, for example, at the cruciform joint due to the intersection of a lateral joint and a vertical joint and at the T-shaped joint due to the T-shaped adjoining of three cladding units are sealed by either attaching the relevant waterproof sheets through the medium of an adhesive agent or by means of thermal welding to the joined corner parts of the waterproof tapes of the fastener stringers protruding from the corner parts of the frameworks of the cladding units or by further filling the joined corner parts with a wet sealing material.

As another mode of the seal structure, a seal structure is provided which is capable of sealing the end-part joint between the end parts of a first and a second cladding unit which adjoin each other and a wall in an opening of a building with a

This Sheet Has Been Replaced.



REPLACEMENT SHEET


18 MAR 1997


- 4 -

wet sealing material. In one mode of this seal structure, the joint between the first and second cladding units is sealed by coupling the engaging parts of the opposed fastener stringers of the first and second cladding units. In the end part in which the joint between the first and second cladding units confronts the wall surface in the opening of the building, the end parts of a pair of opposed fastener stringers of the first and second cladding units are extended to the end parts of the waterproof tapes opposed to the wall of the building and joined integrally to the end parts of the waterproof tapes thereby connecting the waterproof tapes opposed to the wall of the building through the medium of the extended parts of the coupled fastener stringers. The waterproof tapes joined as described above and opposed to the wall of the building and the extended parts of the fastener stringers are bent so that the bent parts are opposed to the wall of the building. The gaps between the wall of the building and the bent parts of those of the waterproof tapes and the fastener stringers of the first and second cladding units that are opposed to the wall of the building are sealed by filling the gaps with the wet sealing material.

In another mode of the seal structure for the end-part joint, the waterproof tapes of the first and second cladding units which are opposed to the wall in the opening of the building are bent so that the bent parts of the waterproof tapes are opposed to the wall of the building. A waterproof sheet is disposed as tightly joined over the building wall side end parts of the waterproof tapes of the coupled fastener

This Sheet Has Been Replaced



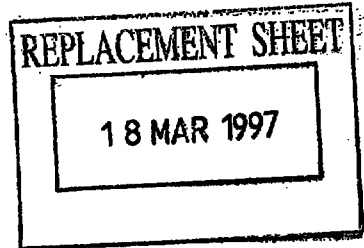


- 5 -

stringers and the opposed end parts of the bent waterproof tapes opposed to the wall of the building so as to cover the gap between the opposed end parts of the bent waterproof tapes. The gaps between the wall of the building and the waterproof sheet and tapes of the first and second cladding units opposed to the wall of the building are sealed by filling the gaps with the wet sealing material.

According to yet another mode of the present invention, a seal structure is provided which is capable of sealing the joint to be formed where an obstacle thrusts out from between the first and second cladding units arranged in an adjoining state with a wet sealing material. In this seal structure, depressed parts adapted jointly to conform to the contour of the obstacle are formed one each in the first and second cladding units thereby interrupting the continuity of the fastener stringers in the depressed parts. The waterproof tapes are attached to the surfaces of the depressed parts. The end parts of the waterproof tapes of the depressed parts are joined to the waterproof tapes of the opposed fastener stringers mentioned above. The waterproof tapes are bent such that the bent parts thereof are opposed to the obstacle. The engaging parts of the opposed fastener stringers attached to the first and second cladding units mentioned above are mutually coupled thereby sealing the joints on the opposite sides across the obstacle as the boundary. The gaps between the obstacle and the end parts of the coupled fastener stringers mentioned above and the gaps of the obstacle and the waterproof tapes of the depressed parts are sealed by filling

This Sheet Has Been Replaced



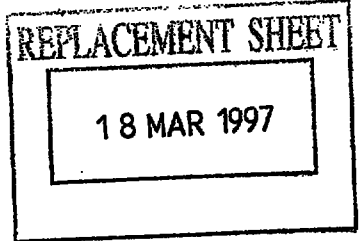

- 6 -

the gaps with the wet sealing material.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features, and advantages of the invention will become apparent from the following description taken together with the drawings, in which:

Fig. 1 is a schematic front view showing the state in which cladding units are fixed to the skeleton frame of a building;

Fig. 2 is a front view of one of such cladding units;

Fig. 3 is a front view of joined fastener stringers;

Fig. 4 and Fig. 5 are respectively a cross section taken through Fig. 2 along the line IV - IV and a cross section taken therethrough along the line V-V;

Fig. 6 is a cross-sectional view of a fixing part of the cladding units attached to a backing member of the skeleton frame of the building;

Fig. 7 is a fragmentary longitudinal section of a cruciform joint among cladding units;

Fig. 8 is a cross section taken through Fig. 7 along the line IIX - IIX;

Fig. 9 is a fragmentary longitudinal section of a T-shaped joint among cladding units;

Fig. 10 is a cross section taken through Fig. 9 along the line X - X;

Fig. 11 is a perspective view of the joined fastener stringers for a cladding unit adjoining an edge part of the wall in the opening of the building;

Fig. 12 is a fragmentary perspective view showing the

state of coupling the upper and the lower fastener stringer of the adjoining cladding units adjoining the edge part of the wall in the opening of the building;

Fig. 13 is a fragmentary side view showing the state of coupling vertically adjoining cladding units along the edge part of the wall in the opening of the building;

Fig. 14 is a fragmentary longitudinal section of an end part joint of vertically adjoining cladding units along the edge part of the wall in the opening of the building;

Fig. 15 is a cross section taken through Fig. 14 along the line XV - XV;

Fig. 16 is a front view of another embodiment of the joined fastener stringers for a cladding unit adjoining the edge part of the wall in the opening of the building;

Fig. 17 is a fragmentary perspective view of the state of coupling the upper and the lower fastener stringer of the adjoining cladding units adjoining the edge part of the wall in the opening of the building;

Fig. 18 is a fragmentary perspective view of the state of adhesion of a waterproof sheet to the end parts of the upper and lower waterproof tapes joined to the coupled fastener stringers as shown in Fig. 17;

Fig. 19 is a fragmentary longitudinal section of a joint along the periphery of an obstacle;

Fig. 20 is a front view of a cladding unit having a glass plate as a face member;

Fig. 21 is a cross section taken through Fig. 20 along the line XXI - XXI;

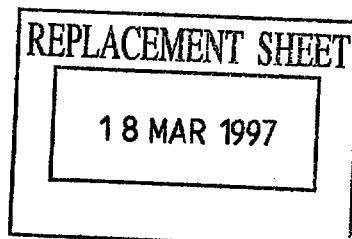


Fig. 22 is a cross section taken through Fig. 20 along the line XXII - XXII;

Fig. 23 and Fig. 24 are respectively a longitudinal section and a cross-sectional view showing a connecting part between a cladding unit having a face material thereof formed of a board material and a cladding unit having a face material thereof formed of a glass plate; and

Fig. 25 and Fig. 26 are respectively a longitudinal section and a cross-sectional view showing an embodiment having adjoining cladding units so united that their surfaces do not fall flush.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A plurality of lateral backing members 3 made of steel and a plurality of vertical backing members 4 made of steel are fixed in an opening 2 in a skeleton frame of a building 1 and cladding units 5 are fixed to the outdoor sides of the upper and lower lateral backing members 3 and the left and right vertical backing members 4 as shown in Fig. 1. The end part joints between the cladding units 5 and vertical edge parts 6 and lateral edge parts 7 in the opening of the building and lateral joints and vertical joints between vertically and laterally adjoining cladding units 5 are severally sealed with a waterproof slide fastener and a waterproof sheet which will be specifically described hereinafter.

The cladding units 5 mentioned above, as shown in Fig. 2, each comprise a cladding member 15 consisting of a framework 13 formed by joining an upper frame member 10, a lower frame member 11, and laterally opposite vertical frame members 12 in

the shape of a square and a face member 14 fixed to the outdoor side surface of the framework 13 and fastener stringers 16 attached to the frame members 10, 11, and 12. The fastener stringers 16 are severally paired with those of the cladding units 5 which are adjoined as opposed thereto and, consequently, are enabled to form waterproof slide fasteners in cooperation therewith.

The fastener stringers 16 mentioned above, as shown in Fig. 3, each comprise a waterproof tape 17 and an engaging part 18 having a multiplicity of coupling elements 19 fixed to the waterproof tape 17 as regularly spaced along one longitudinal edge part thereof. One end part 18a of the engaging part 18 protrudes from one end part 17a of the waterproof tape 17 in the longitudinal direction thereof so as to permit easy insertion thereof into a slide groove of a slider 31, as shown in Fig. 2.

The opposite end parts of each waterproof tape 17 are cut at an angle of 45 degrees and the end parts of the adjoining waterproof tapes 17 are opposed and joined by thermal welding. While four fastener stringers 16 are consequently joined in the shape of a square, notches 16a are formed one each in corner parts 17b of the joined fastener stringers 16 so as to prevent the relevant engaging parts 18 from continuing and allow extraction of a slider. Optionally, the end parts of the adjoining waterproof tapes 17 may be allowed to overlap and are joined to each other by means of thermal welding or an adhesive agent.

The substance of which the waterproof tape 17 is made is

REPLACEMENT SHEET

18 MAR 1991


- 10 -

silicone rubber. The waterproof tape 17, therefore, excels in weatherability and durability and exhibits good fastness of adhesion to a waterproof sheet and the wet sealing material, a silicone sealant which will be specifically described hereinbelow.

In the embodiment described above, the face member 14 has been depicted as formed of a plate material. Optionally, it may be made of a glass material, a screen, or other materials.

The frame members 10, 11, and 12 mentioned above, as shown in Fig. 4 and Fig. 5, each comprise an elongate inner wall part 20, an elongate outer wall part 22, and a connecting part 21 serving to connect the longitudinal edges of these wall parts, which are so joined as to form a cross section roughly in the shape of three sides of a square. The outer edge part of the connecting part 21 is bent in the shape of a crank to form a tape fixing part 23 along the outer wall part 22. In the other longitudinal edge of the outer wall part 22, a plurality of outwardly protruding fixing pieces 24 are integrally formed as spaced with prescribed intervals in the longitudinal direction thereof. To the connecting parts 21 of the frame members 10, 11, and 12, the face member is fixed with securing devices or fasteners 25. The rear side of the face member 14 is separated from the tape fixing part 23 to form a depressed part 26 therebetween. The fixing pieces 24 protrude outwardly from the peripheral edges of the face member 14.

The end parts of the frame members 10, 11, and 12 are cut at an angle of 45 degrees and abutted and connected by welding

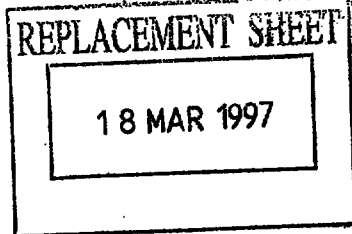

- 11 -

or by means of a corner block or a connecting piece. The longitudinal edge part of each of the waterproof tapes 17 which form the fastener stringers 16 is secured to the tape fixing parts 23 with a securing device or fastener 28 through the medium of a retainer piece 27. The retainer pieces 27 and the securing devices 28 are disposed inside the depressed parts 26 and are covered with the face member 14 and therefore placed out of sight. The longitudinal edge part of each of the waterproof tapes 17 and the one end parts 18a of the engaging parts 18 protrude outwardly from the face member 14. The depressed parts 26 (the gaps between the face member 14 and the waterproof tapes 17) are each filled with a wet sealing material 29 such as silicone rubber through the medium of a backup member 29a formed of a plastic foam such as a hard polyurethane foam. Owing to the use of the wet sealing material 29 in this manner, the waterproof tapes 17 of the four squarely joined fastener stringers 16 are tightly secured to the framework 13 and the joined corner parts 17b of the adjoining waterproof tapes 17 are allowed to protrude outwardly from the corner parts of the framework 13.

The cladding unit 5 is assembled by fixing the four squarely joined fastener stringers 16 to the framework 13 and thereafter fixing the face member 14 thereto.

The cladding units 5 are assembled at a factory, for example, and then transported to a site for the fixation on a building. The fixing pieces 24 of the vertical frame members 12 of the laterally adjoining cladding units 5 are severally secured with a securing device or fastener 30 such as, for


18 MAR 1997

- 12 -

example, a screw to the vertical backing member 4 as shown in Fig. 6 and, at the same time, the fixing pieces 24 of the upper and lower frame members 10, 11 of the vertically adjoining cladding units 5 are severally secured with a securing device such as, for example, a screw to the lateral backing member 3. The fixing pieces 24 each have an oblong hole 24a formed therein (see Fig. 2 and Fig. 6). Since the oblong holes 24a are so adapted that the securing device 30 may be inserted therethrough, the cladding units 5 are allowed to move in the direction of plane.

In the state in which the laterally adjoining cladding units 5 are fixed to the lateral backing members 3 and the vertical backing members 4 of the skeleton frame of the building 1, the engaging parts 18 of the fastener stringers 16 attached to the vertical frame members 12 are opposed to each other. The outwardly projecting one-end parts 18a of the paired engaging parts 18 are drawn out from between the laterally adjoining cladding units 5 and are inserted in a slider 31 as indicated by an imaginary line in Fig. 2. The slider 31 is moved in the direction of length of the paired engaging parts 18 to mesh the coupling elements 19 of the engaging parts 18 of the paired fastener stringers 16. Then, the slider 31 is extracted through the notch 16a in the other end part of the paired fastener stringers 16.

Since the waterproof tapes 17 of the pair of the fastener stringers 16 are airtightly and watertightly coupled as a result of the procedure described above, the vertical joint between the laterally adjoining cladding units 5 can be sealed



- 13 -

infallibly. Since the slider 31 is engaged with the engaging parts 18 on the outer side than between the laterally adjoining cladding units 5, the work of coupling of the fastener stringers is easy to perform.


Since the lateral joint between the vertically adjoining cladding units 5 is sealed in the same manner as described above, it can be sealed infallibly.

The outwardly projecting one-end parts of the engaging parts 18 of the fastener stringers 16 may be either cut off or left per se after they have been coupled by means of the slider 31. In the illustrated embodiments, they are depicted in a cut state.

Now, the seal structure for the cruciform joint (the part indicated by A in Fig. 1) formed by the vertically and laterally adjoining cladding units 5 will be described below.

Since the fastener stringers 16 have their continuity interrupted in the part of the cruciform joint resulting from the intersection of the lateral joint and the vertical joint as shown in Fig. 7, an opening S_1 of the shape of a square occurs in the part mentioned above.

The opening S_1 mentioned above, therefore, is closed by joining a cruciform waterproof sheet 32 with an adhesive agent 33 to the joined corner parts 17b of the waterproof tapes 17 of the fastener stringers 16 protruding from the corner parts of the framework 13 in the part of the cruciform joint as shown in Fig. 7 and Fig. 8 so that the part of the cruciform joint is sealed by continuing the joined corner parts 17b of the waterproof tapes 17 of the fastener stringers 16 through the

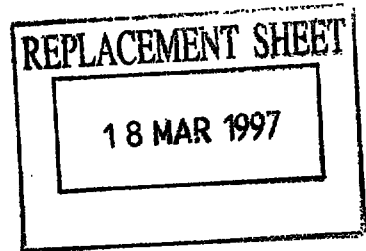

- 14 -


medium of the waterproof sheet 32. This sheet 32 may be joined to the joined corner parts 17b of the waterproof tapes 17 by means of thermal welding.

The waterproof sheet 32 is made of a material such as silicone resin which excels in weatherability and durability and manifests fast adhesiveness to the waterproof tapes 17. It is appropriate to adopt an adhesive agent 33 using a silicone basis.

When the waterproof sheet 32 is to be joined by adhesion as described above, it is difficult to implement this adhesion by depressing the sheet 32 with strong force against the waterproof tapes 17 because the waterproof tapes 17 are separated from the lateral backing members 3 and the vertical backing members 4. The present seal structure, therefore, attains this adhesion infallibly by fixing a cruciform receiving block 34 to the lateral backing members 3 and the vertical backing members 4 and thereby causing this receiving block 34 to support the waterproof tapes 17 and allow the sheets 32 to be depressed with strong force against the waterproof tapes 17, as shown in Fig. 7 and Fig. 8. This receiving block 34 is provided with a cruciform groove 34a for admitting the engaging parts 18.

Optionally, the seal aimed at may be obtained by filling the opening S₁ with a wet sealing material such as silicone rubber instead of the adhesion of the waterproof sheet 32.

Next, the seal structure for the T-shaped joint (the part indicated by B in Fig. 1) to be formed among three cladding units 5 in such a manner that one of the cladding units 5 will

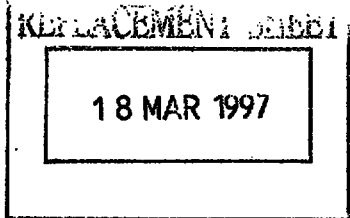


- 15 -

adjoin astraddle to the other two cladding units 5', 5'' disposed as adjoined to each other will be described below.

The laterally opposite fastener stringers 16', 16'' attached to the upper frame members 10', 10'' of the laterally adjoining cladding units 5', 5'' are severally coupled with the fastener stringer 16 attached to the lower frame member 11 of the upper cladding unit 5 as shown in Fig. 9. Since a gap occurs between the end parts of the laterally opposite fastener stringers 16', 16'', however, the fastener stringers 16', 16'' have the continuity thereof interrupted in the part of the T-shaped joint resulting from the intersection of the lateral joint and the vertical joint and consequently give rise to an opening S_2 of the shape of a square in the part mentioned above.

The opening S_2 mentioned above, therefore, is closed by joining a generally T-shaped waterproof sheet 35 with an adhesive agent 36 to all the joined corner parts 17b of the waterproof tapes 17', 17'' of the laterally opposite fastener stringers 16', 16'' and the waterproof tape 17 of the upper fastener stringer 16 in the part of the T-shaped joint as shown in Fig. 9 and Fig. 10 and, at the same time, the part of the T-shaped joint is sealed by continuing the fastener stringers 16, 16', and 16'' through the medium of the sheet 35.

In this case, as in the case of sealing the part of the cruciform joint mentioned above, a T-shaped receiving block 37 is disposed on the intersection of the lateral backing members 3 and the vertical blocking members 4 so that the waterproof sheet 35 will be infallibly joined to the waterproof tapes 17, 17', and 17'' by being depressed with strong force against the



- 16 -

waterproof tapes 17, 17', and 17''. This receiving block 37 likewise has a groove 37a incised in the surface thereof.

The fastener stringers 16', 16'' of the lower laterally adjoining cladding units 5', 5'' are severally coupled with the opposite one fastener stringer 16 attached to the lower frame member 11 of the upper cladding unit 5 on the opposite longitudinal edge portions relative to the medial portion as the boundary as shown in Fig. 9. The fastener stringer 16 attached to the lower frame member 11 of the upper cladding unit 5 mentioned above is, therefore, divided into a first fastener stringer 16-1 and a second fastener stringer 16-2 as shown in Fig. 9, the separated end parts of the waterproof tape 17 are joined by thermal welding, and an edge of the thermally welded part is partly notched to permit removal of the slider. The one-end parts of the engaging parts 18 of the second fastener stringer 16-2 and the lower fastener stringer 16'' connected thereto are formed so as to protrude from the waterproof tapes 17 in the longitudinal direction thereof as indicated by an imaginary line in Fig. 9.

In such an arrangement, the lower left fastener stringer 16' attached to the upper frame member 10' of the left cladding unit 5' and the upper first fastener stringer 16-1 attached to the lower frame member 11 of the upper cladding unit 5 are coupled with each other by engaging the slider with the left end parts respectively of these fastener stringers and moving the slider along the joint length of these fastener stringers. This slider is removed in the opening S_2 in the T-shaped joint. The lower right fastener stringer 16'' attached to the

18 MAR 1997

- 17 -


upper frame member 10'' of the right cladding unit 5'' and the upper second fastener stringer 16-2 are coupled with each other by engaging the slider with the medial end parts positioned in the part of the T-shaped joint (the one-end parts 18a of the longitudinal engaging parts 18) respectively of these fastener stringers and moving the slider along the joint length of the fastener stringers. Thus, the engagement of the slider with fastener stringers is easily performed. Optionally, the one-end parts 18a of the engaging parts 18 may be kept from protruding from the waterproof tapes 18 in their longitudinal direction.

The T-shaped joint formed by the lower cladding unit 5 and the laterally paired upper cladding units 5 indicated by C in Fig. 1 is sealed in the same manner as described above. The seal aimed at may be attained by filling the opening S_2 with a wet sealing material instead of the adhesion of the waterproof sheet 35.

Now, the seal structure for the end part joint to be formed between the vertically adjoining cladding units 5 and the vertical edge part 6 of the wall in the opening of the building (the part indicated by D in Fig. 1) will be described below.

First, the end part structure of the lateral joint between the vertically adjoining cladding units on the side of the wall in the opening of the building will be explained.

The end parts 16b on the wall side of the building of the upper and lower fastener stringers 16 attached to the cladding unit 5 opposed to the vertical edge part 6 of the wall in the

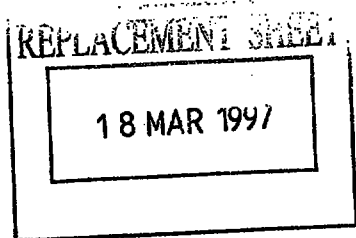


- 18 -

opening of the building 1 are bent as shown in Fig. 11. The longitudinal edge of the vertical waterproof tape 17 opposed to the vertical edge part 6 of the wall in the opening of the building 1 is bent and consequently brought into contact with the outer wall part 22 of the vertical frame member 12 and the upper and lower end parts thereof are joined to the end parts 16b of the upper and lower fastener stringers 16 mentioned above by thermal welding or adhesion. In the embodiment shown in Fig. 11, the waterproof tapes 17 are exclusively attached to the vertical frame members of the cladding units 5 opposed to the vertical edge part 6 of the wall in the opening of the building 1. The fastener stringers provided with an engaging part 18 may be used in the place of the waterproof tapes 17.

Owing to the structure described above, the waterproof tapes 17 are continued in the vertical direction in the longitudinal edges thereof opposed to the vertical edge parts 6 of the wall in the opening of the building 1 and, at the same time, continued also to the fastener stringers 16 in the part of the lateral joint through the medium of the end parts 16b thereof as shown in Fig. 12 when the upper fastener stringers 16 attached to the lower frame member 11 of the upper one of the vertically adjoining cladding units 5 and the lower fastener stringer 16 attached to the upper frame member 10 of the lower cladding unit 5 are coupled with the slider as mentioned above.

As a result, the upper and lower fastener stringers 16 which serve to seal the lateral joint between the vertically adjoining cladding units 5 are continued as far as the one-side

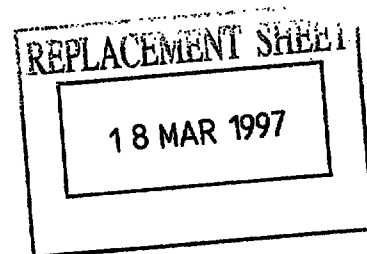

- 19 -


end parts thereof and, at the same time, the waterproof tapes 17 thereof are continued to the vertical waterproof tapes 17 of the upper and lower cladding units 5 and the waterproof tapes 17 are attached as continued to the one-side parts of the vertically adjoining cladding units throughout the entire length thereof as shown in Fig. 13.

Now, the seal structure for the gap between the upper and lower cladding units and the lateral edges of the wall in the opening of the building will be described below.

The seal aimed at is accomplished by fixing the fixing pieces 24 of one of the vertical frame members 12 with a securing device or a fastener 40 to the vertical backing member 4 attached to the end part of the skeleton frame in the opening of the building 1 and filling the vertical joints formed between the vertical edge part 6 of the wall and the vertical backing member 4 of the skeleton frame of the building 1 and one of the vertical frame members 12 with a wet sealing material 42 through the medium of a backup member 41 disposed on the fixing piece 24 along the vertical edge part 6 of the wall throughout the upper and lower cladding units 5 as shown in Fig. 14 and Fig. 15.

Now, the second embodiment of the seal structure for the end part joint mentioned above will be described below.

The one-end parts of the upper and lower fastener stringers 16 are given a length for reaching the bending line 17c of the vertical waterproof tape 17 as shown in Fig. 16. In the state in which the opposed upper and lower fastener stringers 16 of the upper and lower cladding units 5 are

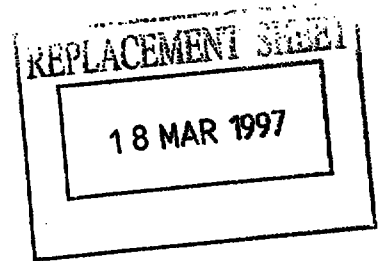

- 20 -


mutually coupled, the waterproof tapes 17 of the coupled fastener stringers 16 and the upper and lower end parts of the vertical waterproof tapes 17 of the upper and lower cladding units 5 are deprived of their continuity as shown in Fig.17.

Then, as shown in Fig. 18, a waterproof sheet 43 is joined by thermal welding or with an adhesive agent to the end parts of the waterproof tapes 17 of the coupled fastener stringers 16 and the vertical waterproof tapes 17 of the upper and lower cladding units 5 to establish continuity between the vertical waterproof tapes 17 of the vertically adjoining cladding units 5 and the waterproof tapes 17 of the coupled fastener stringers 16 serving to seal the lateral joint and the gap formed with the longitudinal edge parts 6 of the wall in the opening of the building 1 is filled with the wet sealing material.

Incidentally, the end part joint which is formed between the lateral edge part 7 of the wall in the opening of the building 1 and the laterally adjoining cladding units 5 as indicated by E in Fig. 1 is sealed in the same manner as described above.

Now, the structure for sealing the joint to be formed between the adjoining cladding units 5 and an obstacle 50 such as the post for an arcade, which is indicated by F in Fig. 1, will be described below on the assumption that the obstacle 50 thrusts from between the adjoining cladding units 5.

The lower frame member 11 of the upper cladding unit 5 is divided by the obstacle 50 as a boundary into a first and a second frame member, 11-1 and 11-2, as shown in Fig. 19 and the first and the second frame member, 11-1 and 11-2, are connected




- 21 -

through the medium of an auxiliary frame member 51 of the shape of three sides of a square to give rise to a depressed part 52 generally conforming to the cross section of the upper half of the obstacle 50.

The auxiliary frame member 51 is obtained by connecting three frame members having the same cross-sectional shape as the lower frame member 11 end to end in the shape of three sides of a square with a lower open side. One edge part of the waterproof tape 17 in the same shape of three sides of a square is attached to the auxiliary frame member 51 and the other edge part of the waterproof tape 17 is belt along the bent line 17c and joined to the bent end parts of the waterproof tapes 17 of the fastener stringers 16 attached to the first and second frame members 11-1 and 11-2 by thermal welding or adhesion.

The upper frame member 10 of the lower cladding unit 5 is also divided by the obstacle 50 as a boundary into a first and a second frame member, 10-1 and 10-2, in the same manner as above, and the first and the second frame member, 10-1 and 10-2, are connected through the medium of an auxiliary frame member 53 of the shape of three sides of a square to give rise to a depressed part 54 generally conforming to the cross section of the lower half of the obstacle 50.

The auxiliary frame member 53 is also obtained by connecting three frame members having the same cross-sectional shape as the upper frame member 10 end to end in the shape of three sides of a square with an upper open side. One edge part of the waterproof tape 17 in the same shape of three sides of a square is attached to the auxiliary frame member 53 and the

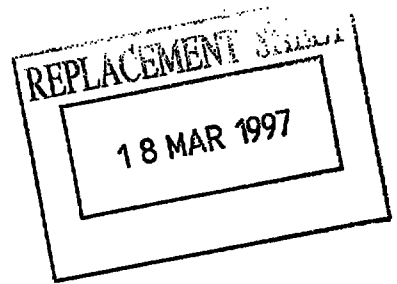


- 22 -

other edge part of the waterproof tape 17 is belt along the bent line 17c and joined to the bent end parts of the waterproof tapes 17 of the fastener stringers 16 attached to the first and second frame members 10-1 and 10-2 by thermal welding or adhesion.

Owing to the structure described above, when the engaging parts 18 of the vertically adjoining lateral fastener stringers 16 are mutually coupled, the vertical waterproof tapes 17 attached to the upper auxiliary frame member 51 and the vertical waterproof tape 17 attached to the lower auxiliary frame member 53 are connected to the end parts of the waterproof tapes 17 of the coupled lateral fastener stringers 16 in the same manner as the seal structure for the end part joint mentioned above (Fig. 13).

Then, the gap between an outer surface 50a of the obstacle 50 opposed to the depressed parts 52, 54 of the upper and lower cladding units 5 and the waterproof tapes 17 is sealed by filling the gap with a wet sealing material 55 through the medium of a backup member. Incidentally, the fixing pieces 24 are integrally provided for the component frame members of the upper and lower auxiliary frame members 51, 53 as connected in the direction of length of the edge parts thereof. The fixing pieces 24 serve as receiving means for the backup member. Alternatively, platelike receiving members may be fixed to the outer surface 50a of the obstacle 50 or to the lateral backing member 3 and the vertical backing member 4.

Now, an embodiment of the cladding unit 5 using the face member 14 made of glass will be described below.



- 23 -

The framework 13 is formed, as shown in Fig. 20, by abutting and connecting the opposite ends of the upper frame member 10 to the upper parts of the left and right vertical frame members 12 and the opposite ends of the lower frame member 11 to the lower parts of the left and right vertical frame members 12.

Hooklike tape fixing members 80 are fixed one each closely to the outdoor edge parts of the outdoor side surfaces 10a, 11a, and 12a of the frame members 10, 11, and 12 in the in-face direction in such a manner as to protrude from the surfaces. The tape fixing members 80, as shown in Fig. 21 and Fig. 22, are each formed of an attaching piece 81 and an outwardly turned piece 82 which are joined to form a cross section of the shape of the letter L. The fixing pieces 81 are severally fixed to the outer surfaces 10a, 11a, and 12a respectively of the frame members 10, 11, and 12 with screws 83. Repressing pieces 85 are fixed one each to the outwardly turned pieces 82 with screws 84. Cover members 86 are fixed in the manner of the snap-in engagement to the retaining pieces 85 to give rise to depressed parts 87 which open toward the outdoor side between the outer faces 10a, 11a, and 12a of the frame members 10, 11, and 12 and the relevant cover members 86.

The opposite end parts of the tape fixing members 80, the repressing pieces, and the cover members 86 are cut at an angle of 45 degrees and butt joined. The depressed parts 87 are filled throughout their combined length with a wet sealing material 88 to seal the gaps between the framework 13 and the tape fixing members 80.

18 MAR 1997


- 24 -

The face member 14 is formed of a glass plate and, as shown in Fig. 21 and Fig. 22, is attached through the medium of a sealing member 90 to inwardly open groove 89 of the upper frame member 10, the lower frame member 11, and the left and right vertical frame members 12. The cladding unit 5 is an ordinary fixed fit sash.

The one-side edge parts of the waterproof tapes 17 of the component fastener stringers 16 of the waterproof slide fastener are attached as depressed with the depressing pieces 85 to the outwardly turned pieces 82 of the tape fixing members 80 and the gaps between the waterproof tapes 17 and the cover members 86 are sealed with a wet sealing material 91 so as to keep rainwater from infiltrating the waterproof tape fixing parts.

A frame material intended to form an ordinary fixed fit sash can be applied for the frame members 10, 11, and 12. It suffices specifically to fix the tape fixing members 80 one each to the outer faces 10a, 11a, and 12a of the frame members 10, 11, and 12 and attach the waterproof tapes 17 of the fastener stringers 16 to the tape fixing members 80.

For the purpose of adjoining the cladding unit 5 having the face member 14 formed of a glass plate to the cladding unit 5 of the first embodiment having the face member 14 formed of a board as shown in Fig. 2, it suffices to join the fixing pieces 24 of the frame members 10, 11, and 12 through the medium of fasteners 94 to the edge parts of an opening 93 of a skeleton frame 92 of a building by means of bolts 95, oppose the cladding units 5 to the opening 93 and fix the cladding units 5

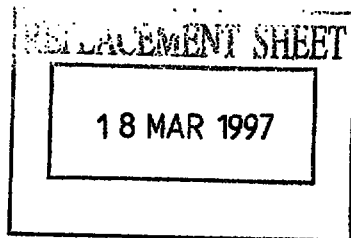

- 25 -

in one plane, and unite the engaging parts 18 of the adjoining fastener stringers 16 by means of the slider as shown in Fig. 23 and Fig. 24. The cladding unit 5 having the face member 14 formed of a glass plate is fixed by causing flange parts 99 of the frame members 10, 11, and 12 to be nipped between a retaining member 97 and a bracket 96 secured to the skeleton frame 92 of the building so as to thrust out from the opening 93 and tying them with screws 98.

Optionally, the tape fixing members 80 may be integrally formed on the outer faces 10a, 11a, and 12a of the frame members 10, 11, and 12.

Now, an embodiment of fixing adjoining cladding units 5 in such a manner that their surfaces will not fall flush.

The fixing pieces 24 of the frame members 10, 11, and 12 of the cladding unit 5 having the face member 14 formed of a board are severally coupled to the fasteners 94 and fixed so as to thrust further on the outdoor side than the skeleton frame 92 of the building as shown in Fig. 25 and Fig. 26.

An ordinary cladding member 15 such as, for example, a fixed fitting sash or an open-close sash is disposed inside the opening 93 of the skeleton frame 92 of the building. Outer frames 100 are fixed one each through the medium of a fixing piece 101 to outdoor surfaces 10b, 11b, and 12b in the out-face direction respectively of the frame members 10, 11, and 12 of the cladding member 15 and the fixing parts thereof are sealed with a wet sealing material 102.

The outer frames 100 each comprise a first plate 103 extended in the out-face direction and a second plate 104

18 MAR 1997

- 26 -


extended in the in-face direction and assume a substantially hook-shaped cross section. A tape fixing member 105 is fixed jointly to the first plate 103 and the second plate 104 by means of bolts 106. The tape fixing member 105 is provided with a fixing piece 107 and a hooklike projecting piece 108. The one-side edge parts of the waterproof tapes 17 of the component fastener stringers 16 are attached as depressed with the depressing pieces 109 by means of screws 110 to the hooklike pieces 108a of the hooklike projecting pieces 108 in the same manner as mentioned above. A wet sealing material 111 is filled in the gap between the second plates 104 and the waterproof tapes 17 of the fastener stringers 16.


As the fixing piece 107 of the tape fixing member 105 is fixed to the fastener 94, the second plate 104 falls flush with the face member 14 and the adjoining fastener stringers 16 are opposed to each other. The engaging parts 18 of the adjoining fastener stringers 16 are meshed with each other by means of the slider.

Owing to the structure described above, the gaps between the ordinary cladding member 15 and four cladding units 5 can be sealed with the waterproof slide fasteners when the ordinary cladding member 15 is fixed in the opening 93 of the skeleton frame 92 of the building and fixing the cladding units 5 having the face member 14 thereof formed of a board one each to the vertical and lateral edge parts of the opening 93.

While certain specific embodiments have been disclosed herein, the invention may be embodied in other specific forms without departing from the spirit or essential characteristics

thereof. The described embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing description and all changes which come within the meaning and range of equivalency of the claims are, therefore, intended to be embraced therein.

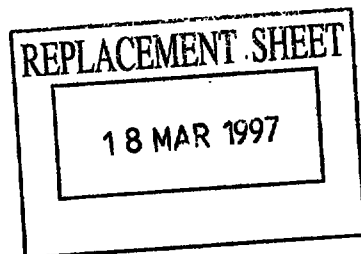



- 28 -

WHAT IS CLAIMED IS:

1. A cladding unit for a building, comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework.


2. The cladding unit according to claim 1, wherein one-end part of said engaging part of each of said fastener stringers protrudes from one-end part of said waterproof tape in the longitudinal direction of the tape.

3. The cladding unit according to claim 1 or 2, which has notches formed one each in said joined corner parts of the waterproof tapes so as to interrupt the continuity of said engaging parts of adjoining fastener stringers.

4. A seal structure for a cruciform joint of four vertically and laterally adjoining cladding units attached to a backing member of a building,

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of

This Sheet Has Been Replaced

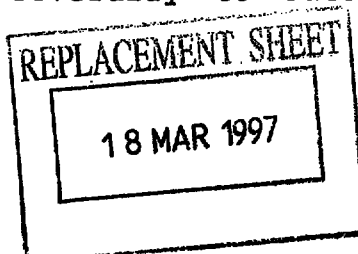



- 29 -

said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;


a lateral joint of said cruciform joint being sealed by coupling said engaging parts of said fastener stringers of vertically adjoining cladding units and a vertical joint thereof being sealed by coupling said engaging parts of said fastener stringers of laterally adjoining cladding units; and

said cruciform joint due to the intersection of said lateral joint and said vertical joint having a waterproof sheet disposed as tightly attached over joined corner parts of said waterproof tapes of said fastener stringers.

5. The seal structure according to claim 4, wherein said waterproof sheet is a cruciform sheet made of a silicone resin.

6. A seal structure for a T-shaped joint formed by first and second cladding units arranged as mutually adjoined and a third cladding unit arranged astraddle said two adjoining cladding units, all cladding units being attached to a backing member of a building;

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of

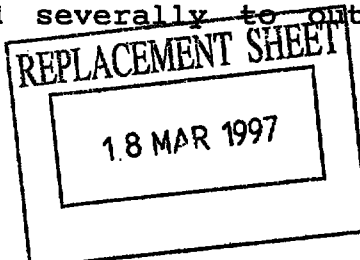



- 30 -

said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;


a first joint between said first and second cladding units being sealed by coupling the engaging parts of opposed fastener stringers of said adjoining first and second cladding units, a second joint between said first and third cladding units and a third joint between said second and third cladding units being severally sealed by coupling the engaging parts of said fastener stringers of said first and second cladding units to the opposite engaging part of said fastener stringer of said third cladding unit; and

said T-shaped joint due to the intersection of said first, second, and third joints having a waterproof sheet disposed as tightly attached over joined corner parts of said waterproof tapes of said fastener stringers.

7. The seal structure according to claim 6, wherein said waterproof sheet is a T-shaped sheet made of a silicone resin.

8. The seal structure according to claim 6 or 7, wherein the fastener stringer of said third cladding unit has a notch positioned in the intersection of said first, second, and third joints.

9. A seal structure for an end-part joint between a wall

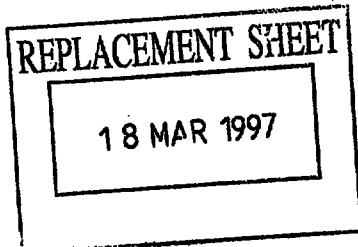

This Sheet Has Been Replaced





- 31 -

in an opening of the building and end parts of first and second cladding units attached as mutually adjoined to a backing member of said building,

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework, at least one waterproof tape attached to an outer lateral part of said cladding member to be opposed to the wall in the opening of the building, and fastener stringers of a waterproof slide fastener attached severally to remaining outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said waterproof tapes being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

the end parts of opposed fastener stringers of said first and second cladding units being extended to end parts of the waterproof tapes opposed to said wall in the opening of said building and joined integrally to the end parts of the waterproof tapes;

a joint between said first and second cladding units being sealed by coupling the engaging parts of opposed fastener stringers of said first and second cladding units;

said waterproof tapes opposed to said wall in the opening of said building and said extended parts of said coupled fastener stringers being bent so that the bent parts are

This Sheet Has Been Replaced



REPLACEMENT SHEET

18 MAR 1997



- 32 -

opposed to said wall in the opening of said building; and

the gap between said wall in the opening of said building and said bent parts of said waterproof tapes and coupled fastener stringers being sealed by filling said gap with a wet sealing material.

10. The seal structure according to claim 9, wherein said waterproof tape attached to said cladding member is replaced by said fastener stringer.

11. A seal structure for an end-part joint between a wall in an opening of a building and end parts of first and second cladding units attached as mutually adjoined to a backing member of said building,

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework, at least one waterproof tape attached to an outer lateral part of said cladding member to be opposed to the wall in the opening of the building, and fastener stringers of a waterproof slide fastener attached severally to remaining outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said adjoining waterproof tapes being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

a joint between said first and second cladding units being sealed by coupling the engaging parts of opposed fastener

This Sheet Has Been Replaced



REPLACEMENT SHEET

18 MAR 1997



- 33 -

stringers of said first and second cladding units;

those of said waterproof tapes of said first and second cladding units that are opposed to said wall in the opening of said building being bent so that the bent parts are opposed to said wall in the opening of said building;

a waterproof sheet being disposed as tightly attached to at least end parts of opposed fastener stringers of said first and second cladding units adjoining said waterproof tapes and of said waterproof tapes; and

the gap between said wall in the opening of said building and said waterproof tapes and said waterproof sheet being sealed by filling said gap with a wet sealing material.

12. The seal structure according to claim 11, wherein said waterproof tape attached to said cladding member is replaced by said fastener stringer.

13. A seal structure for a joint to be formed where an obstacle thrusts out from between a first and a second cladding unit attached as mutually adjoined to a backing member of a building,

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape as spaced at fixed intervals along one longitudinal edge of the tape, said adjoining waterproof tapes being integrally connected, and

This Sheet Has Been Replaced



REPLACEMENT SHEET

18 MAR 1997



- 34 -

joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

said first and second cladding units each having a depressed part jointly conforming to the contour of said obstacle and being provided on the opposite parts thereof across said depressed parts with fastener stringers having the continuity thereof interrupted in said depressed part;

waterproof tapes being attached to surfaces of said depressed parts;

said waterproof tapes being bent so that the bent parts are opposed to said obstacle;

said waterproof tapes in said depressed parts being joined to end parts of the waterproof tapes of said fastener stringers;

joints on the opposite sides across said obstacle as a boundary being severally sealed by coupling the engaging parts of said opposed fastener stringers attached to said first and second cladding units; and

gaps between said obstacle and end parts of said connected fastener stringers and said waterproof tapes in said depressed parts being sealed by filling said gaps with a wet sealing material.

This Sheet Has Been Replaced



REPLACEMENT SHEET

18 MAR 1997

CLADDING UNITS FOR BUILDING AND SEAL STRUCTURE FOR JOINT THEREOF

ABSTRACT

Cladding units for a building and a seal structure for the joints thereof are disclosed. A cladding unit (5) comprises a cladding member (15) comprised of a framework (13) and a face member (14) attached to one side face thereof and fastener stringers (16) for a waterproof slide fastener attached one each to the outer lateral parts of the cladding member (15), the fastener stringers each comprising a waterproof tape (17) and an engaging part (18) provided with a multiplicity of coupling elements (19) attached to the waterproof tape along one longitudinal edge thereof, the end parts of the waterproof tapes of all adjoining fastener stringers being integrally joined, and the joined corner parts (17b) of the waterproof tapes protruding from the corner parts of the framework. The joint formed between the adjoining cladding units is sealed by coupling the engaging parts of the opposed fastener stringers.

(Fig 2)


This Sheet Has Been Replaced



REPLACEMENT SHEET

18 MAR 1997


FIG. 1

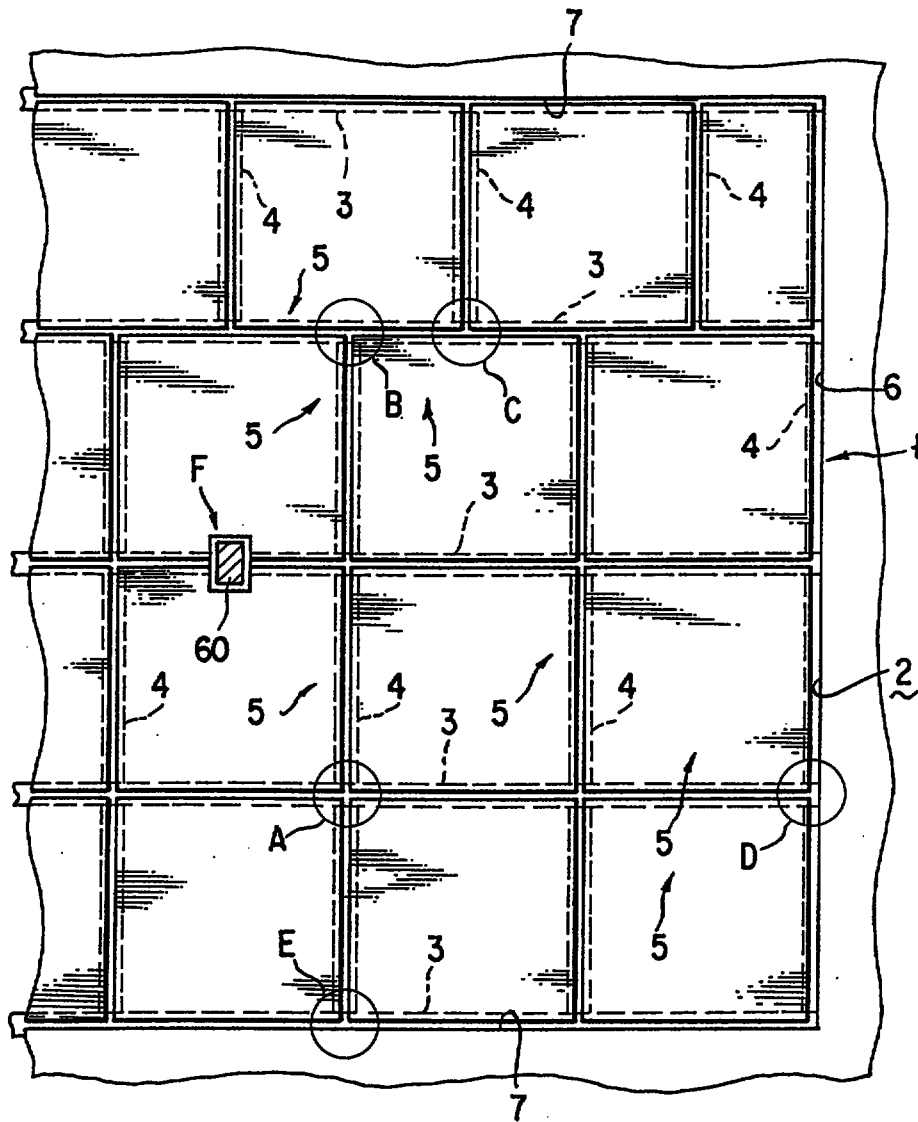

REPLACEMENT SHEET

18 MAR 1997


FIG. 3

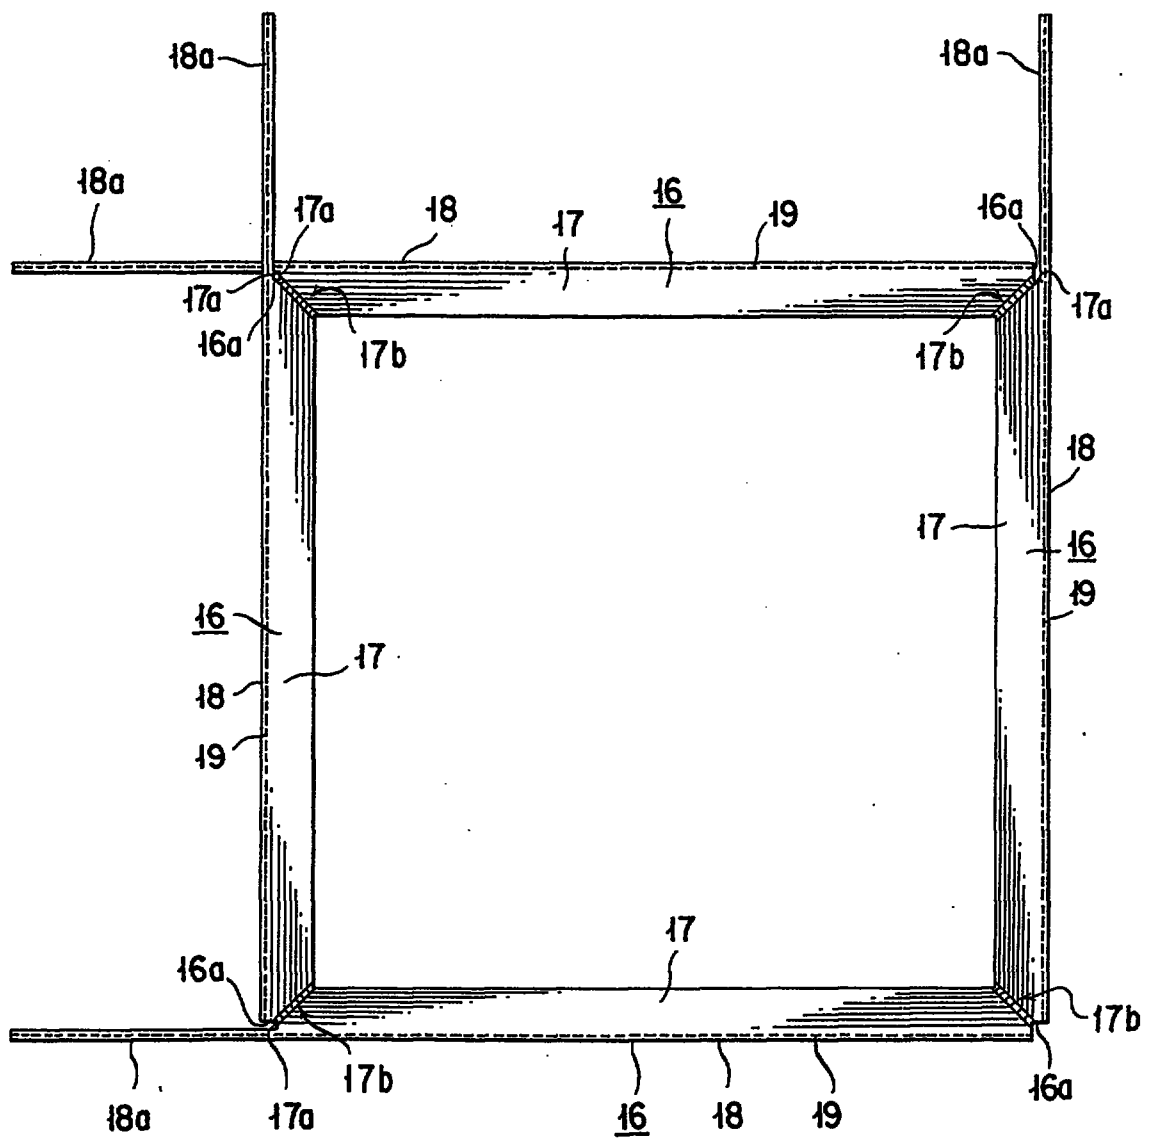

REPLACEMENT SHEET

18 MAR 1997


FIG. 4

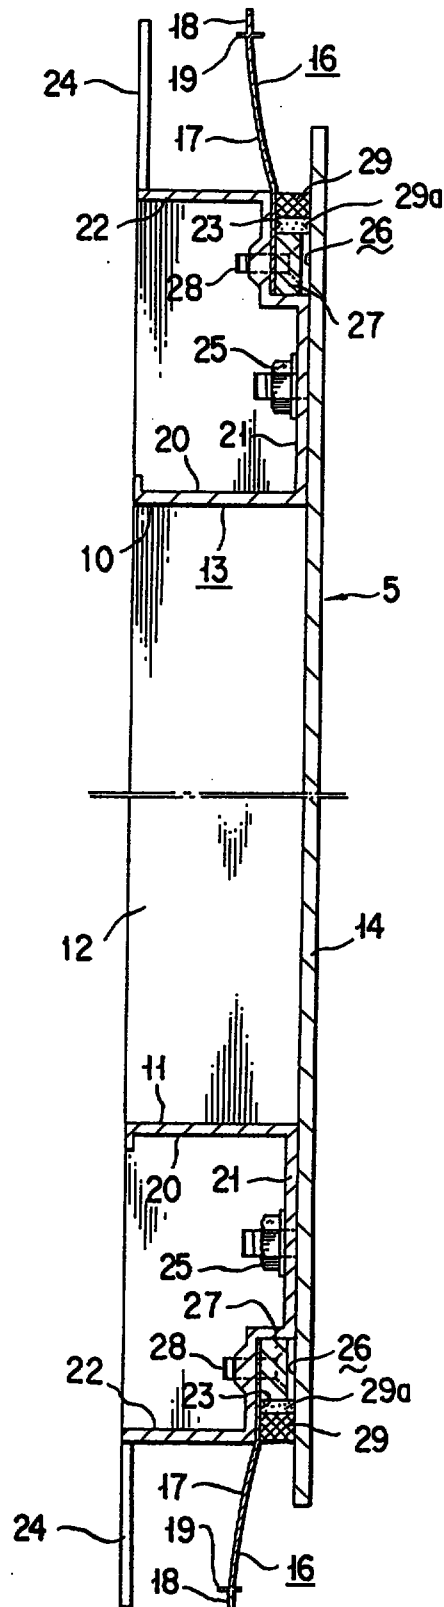

REPLACEMENT SHEET

18 MAR 1997


FIG. 5

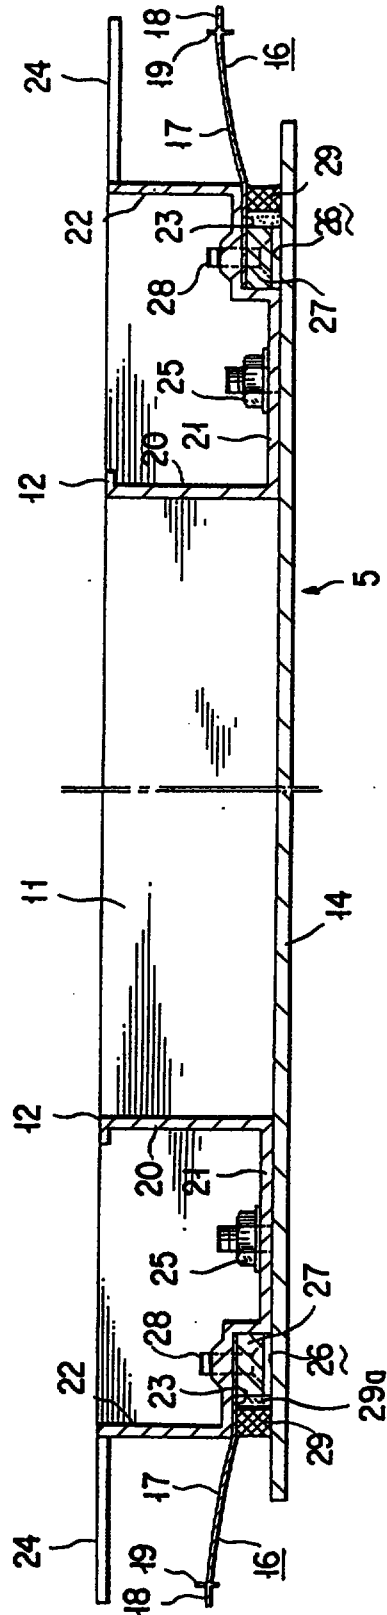

REPLACEMENT SHEET


18 MAR 1997

FIG. 6

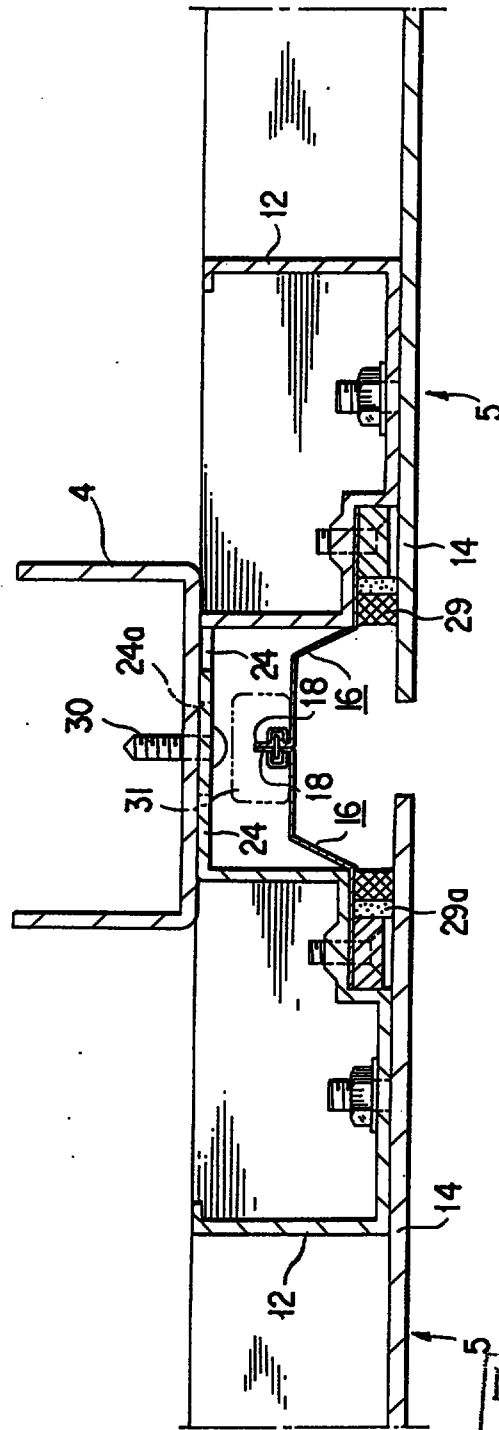


REPLACEMENT SHEET
18 MAR 1997

FIG. 8

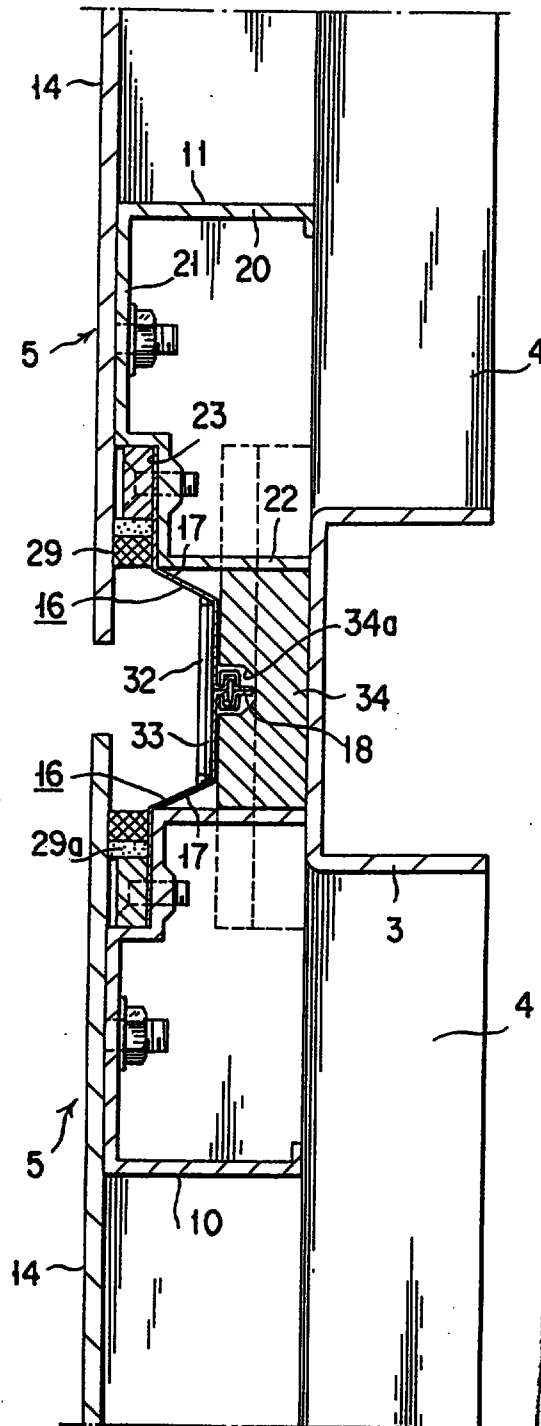

REPLACEMENT SHEET
18 MAR 1997

FIG. 10

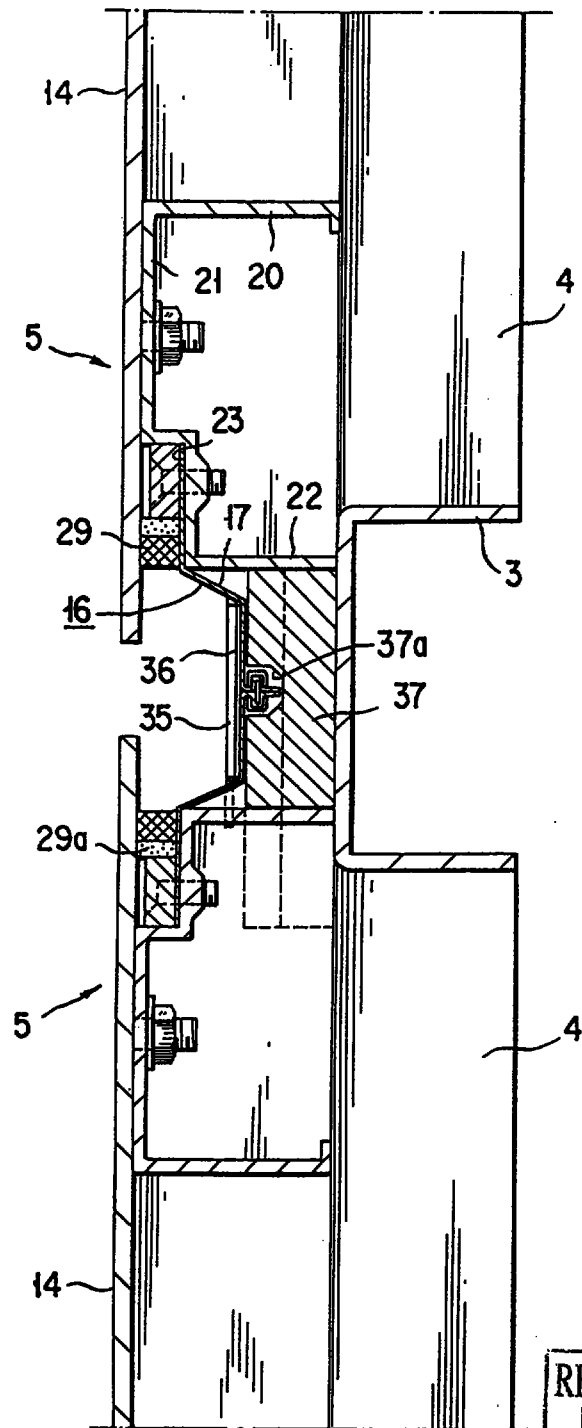

REPLACEMENT SHEET

18 MAR 1997

FIG. 11



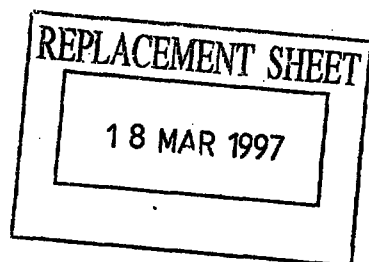



FIG. 12

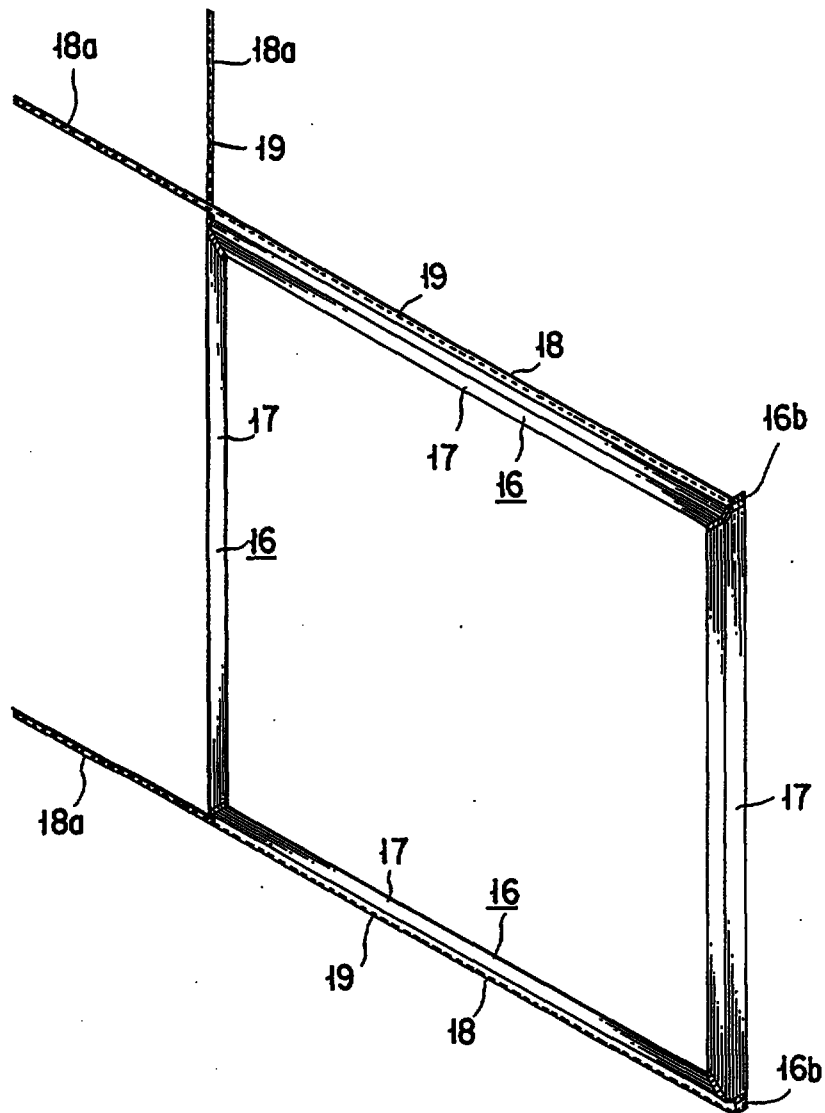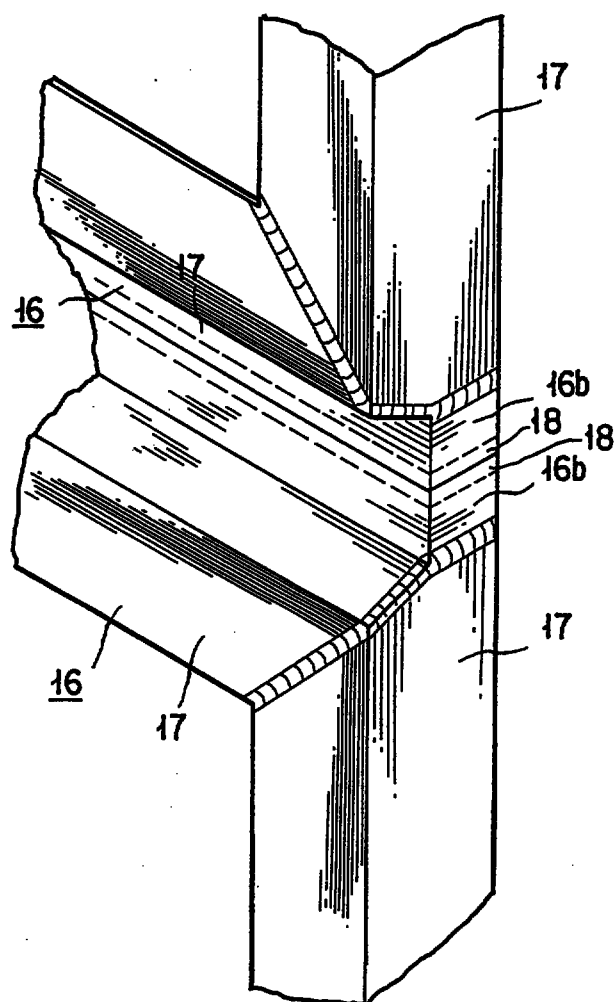

REPLACEMENT SHEET

18 MAR 1997


FIG. 13

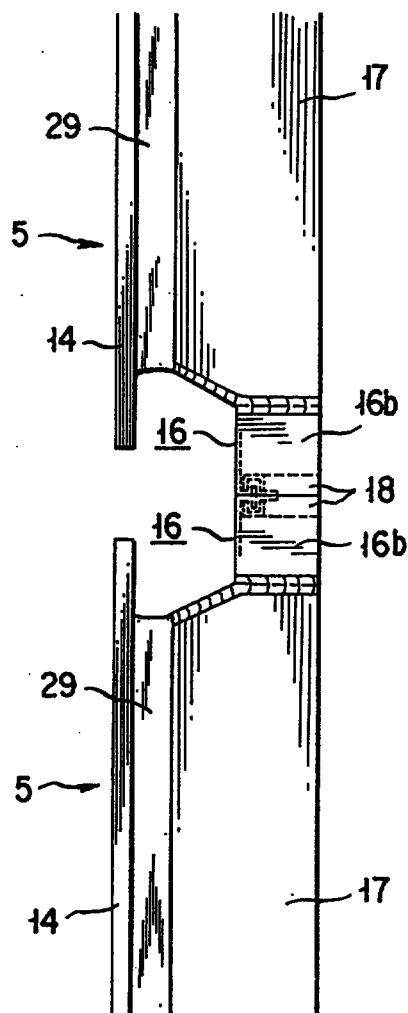

REPLACEMENT SHEET

18 MAR 1997


FIG. 14

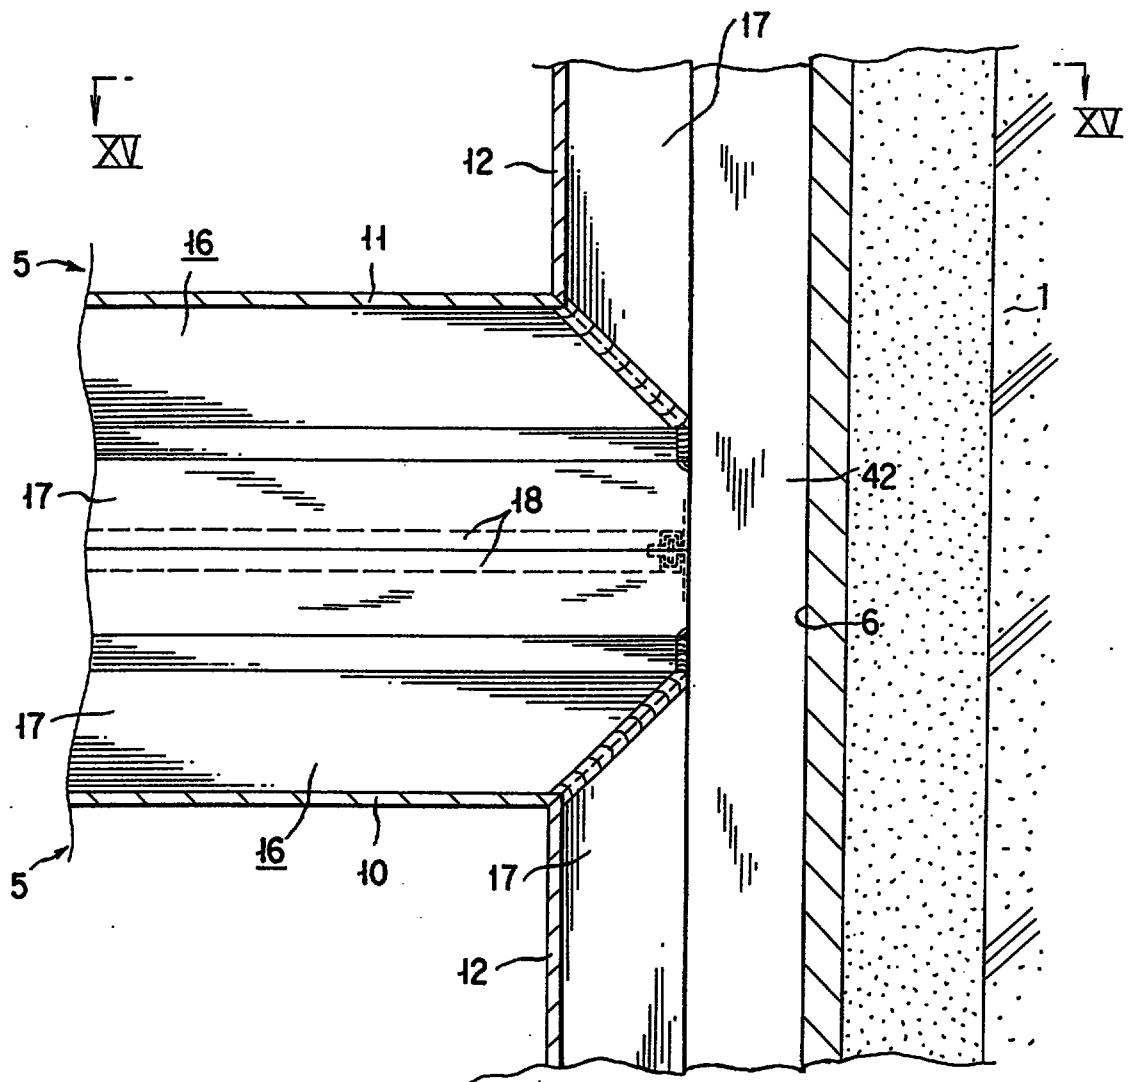

REPLACEMENT SHEET


18 MAR 1997

FIG. 16

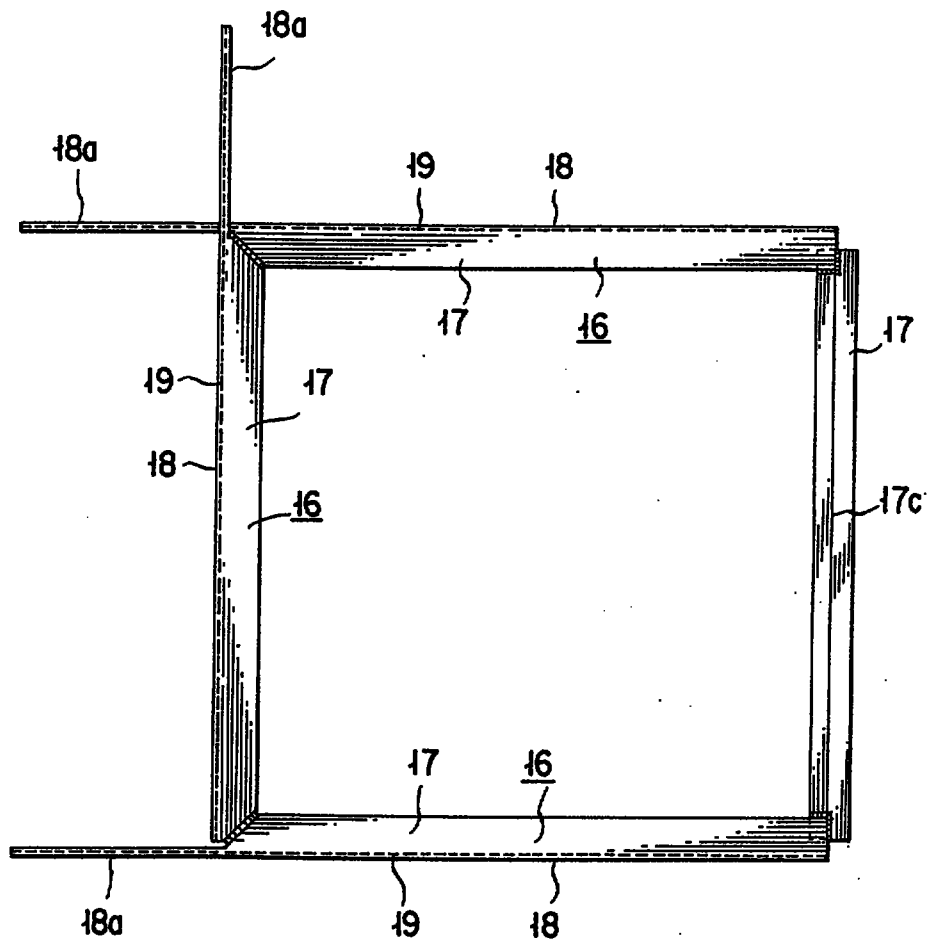

REPLACEMENT SHEET
18 MAR 1997


FIG. 17

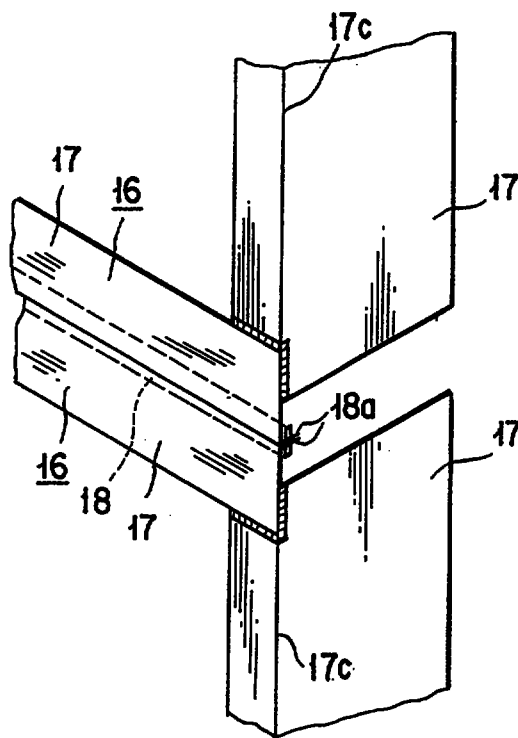

REPLACEMENT SHEET

18 MAR 1997


FIG. 18

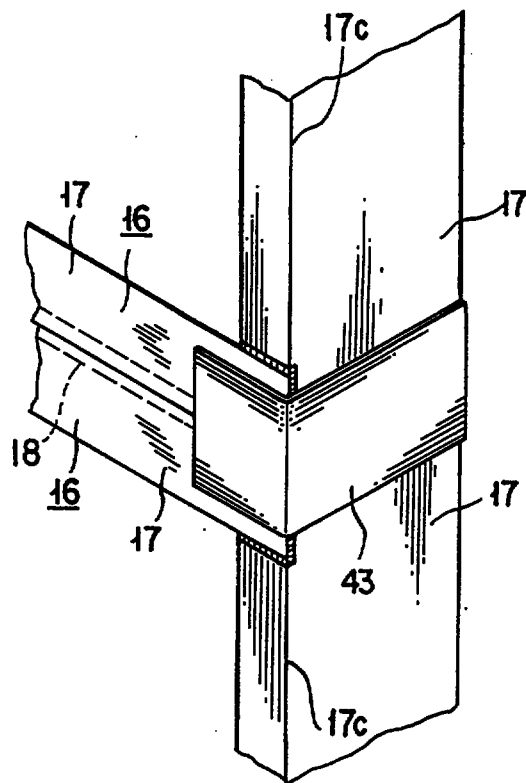

REPLACEMENT SHEET

18 MAR 1997


FIG. 19

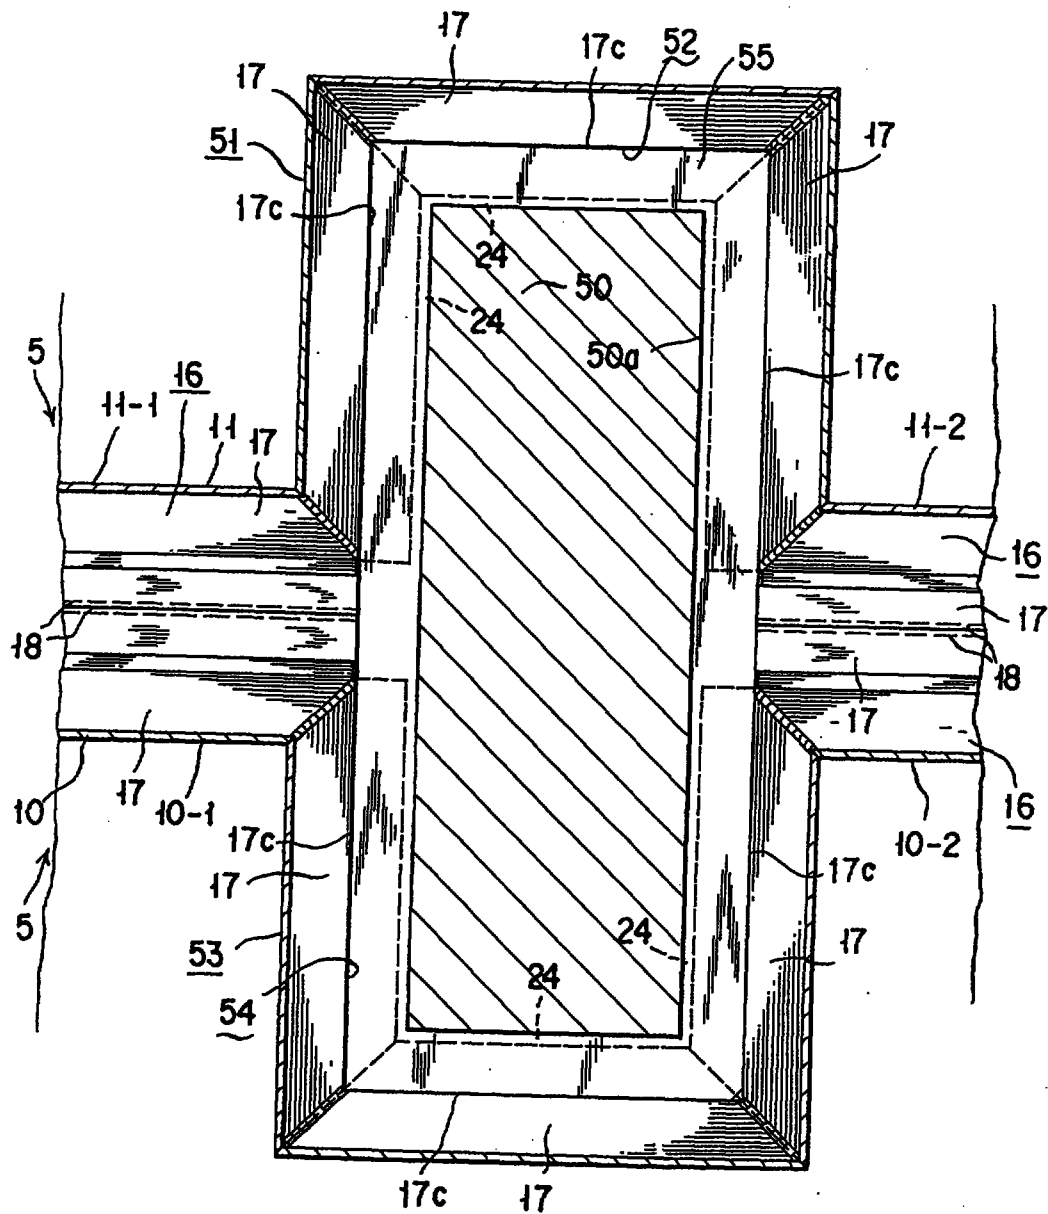

REPLACEMENT SHEET

18 MAR 1997


FIG. 20

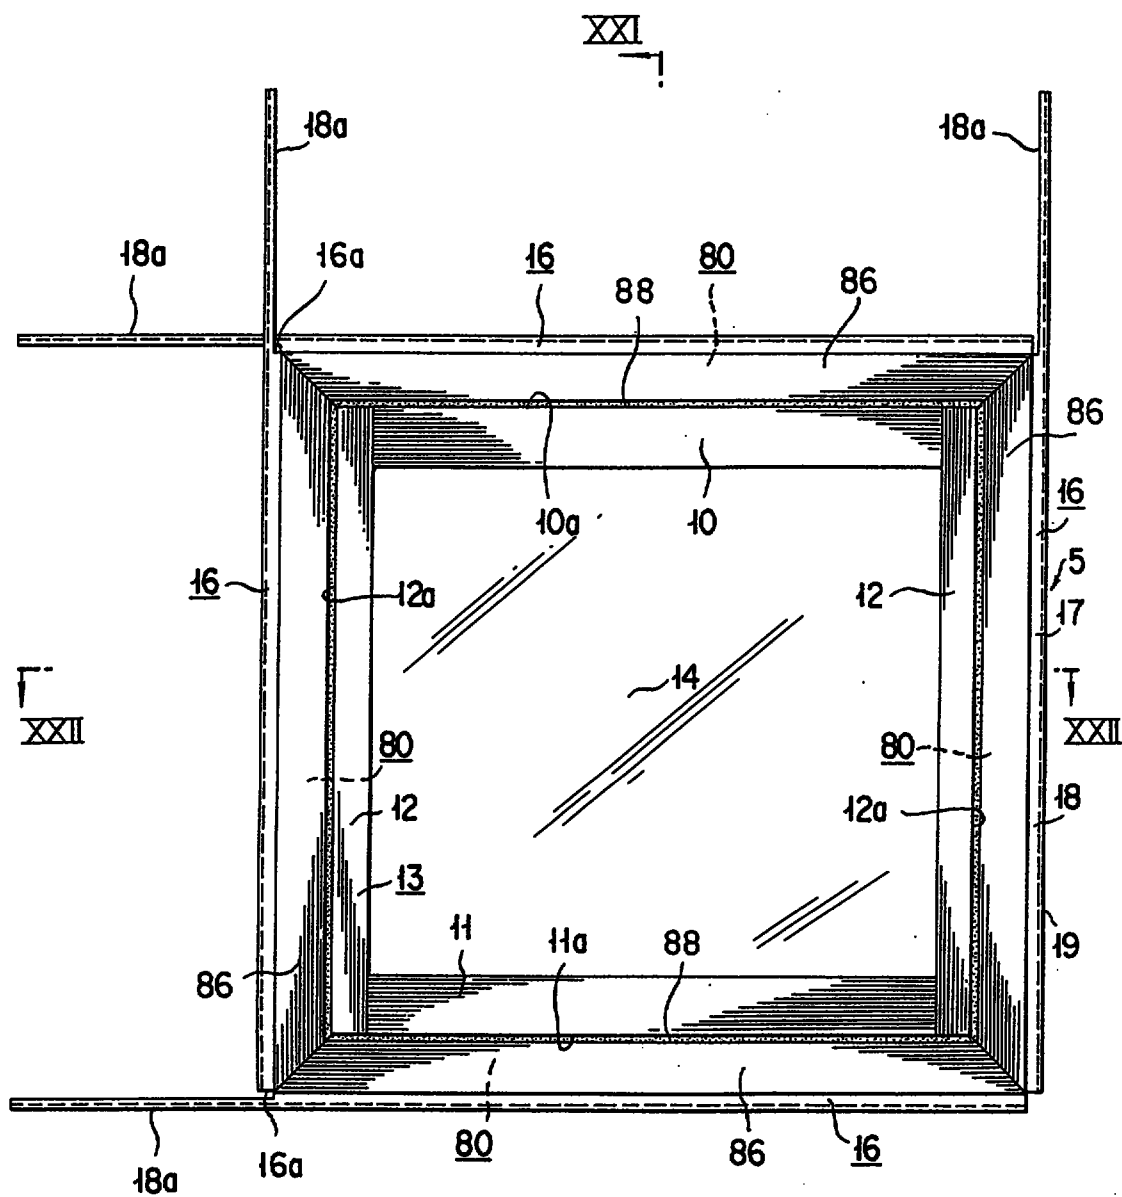

XXI

REPLACEMENT SHEET
18 MAR 1997


FIG. 21

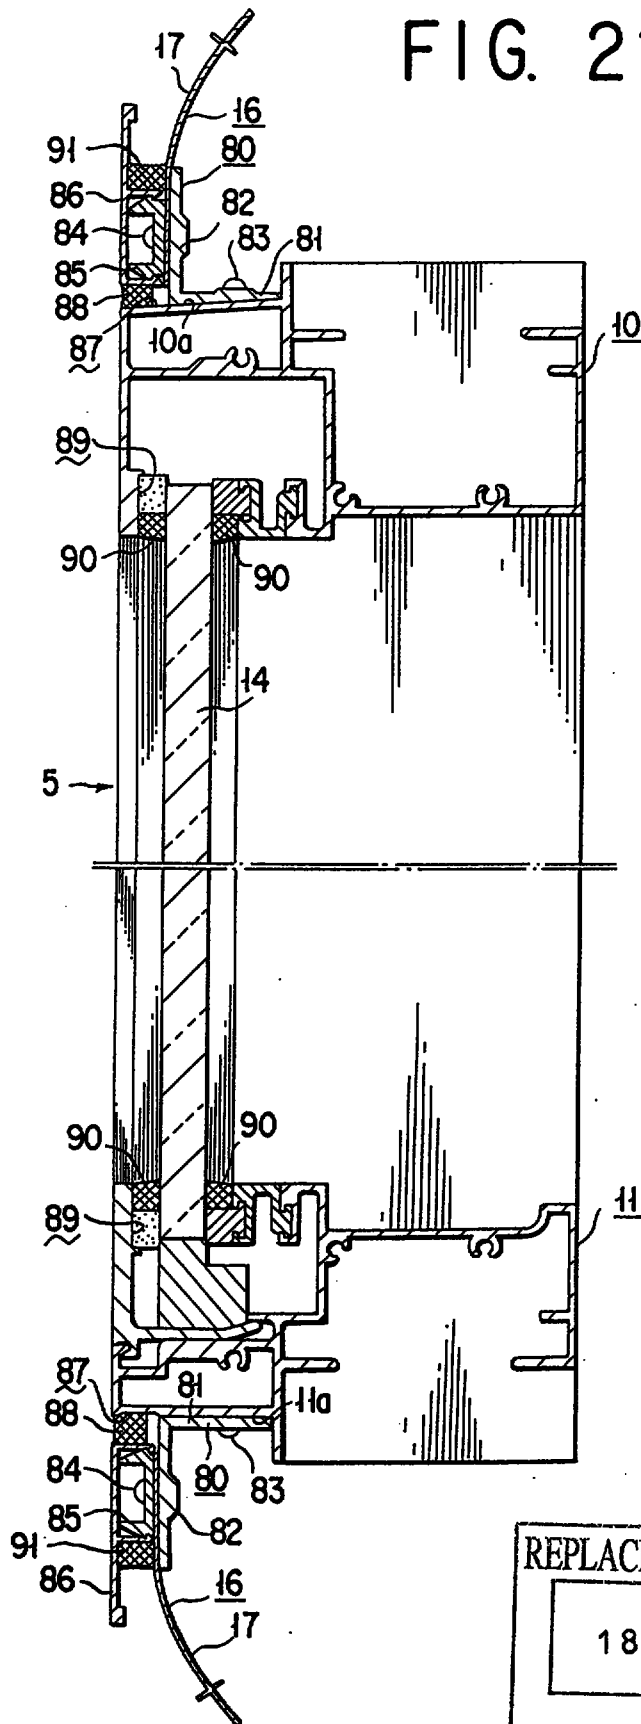

REPLACEMENT SHEET

18 MAR 1997

FIG. 22

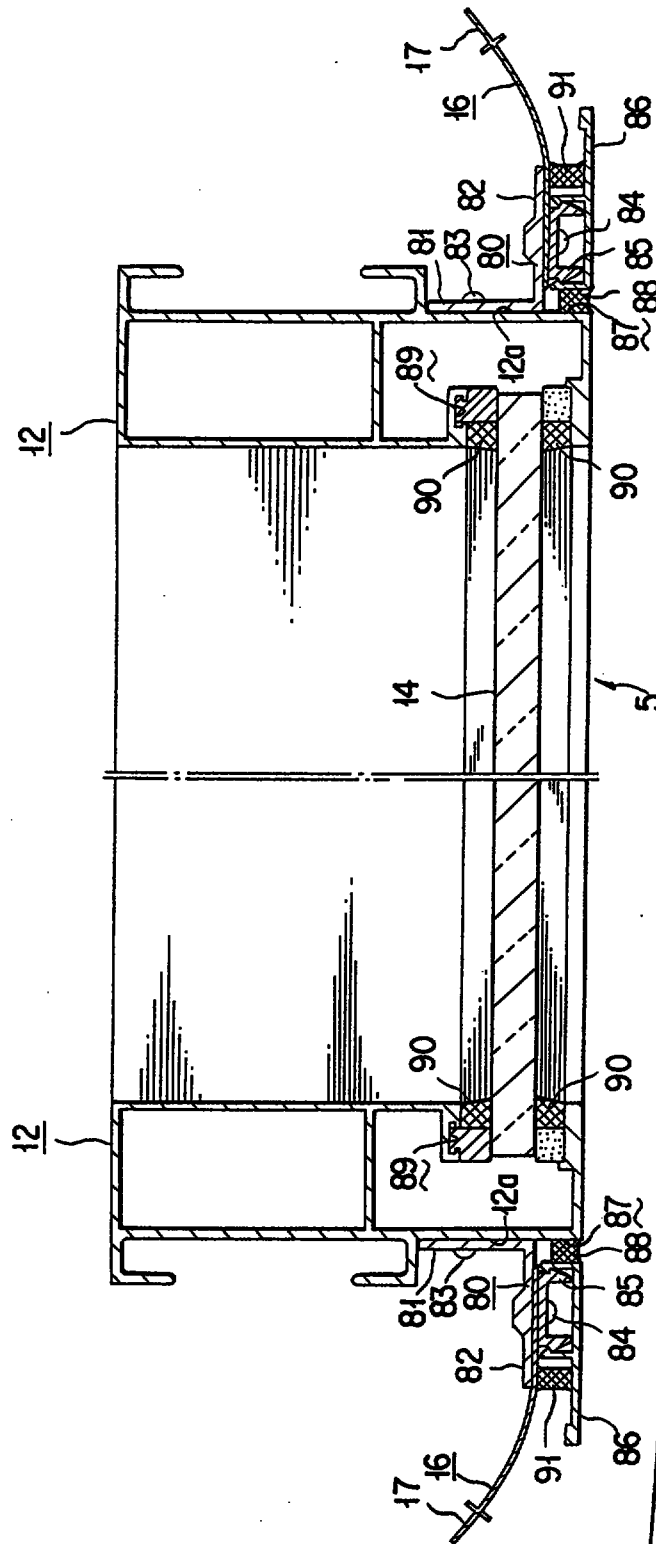


REPLACEMENT SHEET

18 MAR 1997

18 MAR 1997

- 23 -

FIG. 23

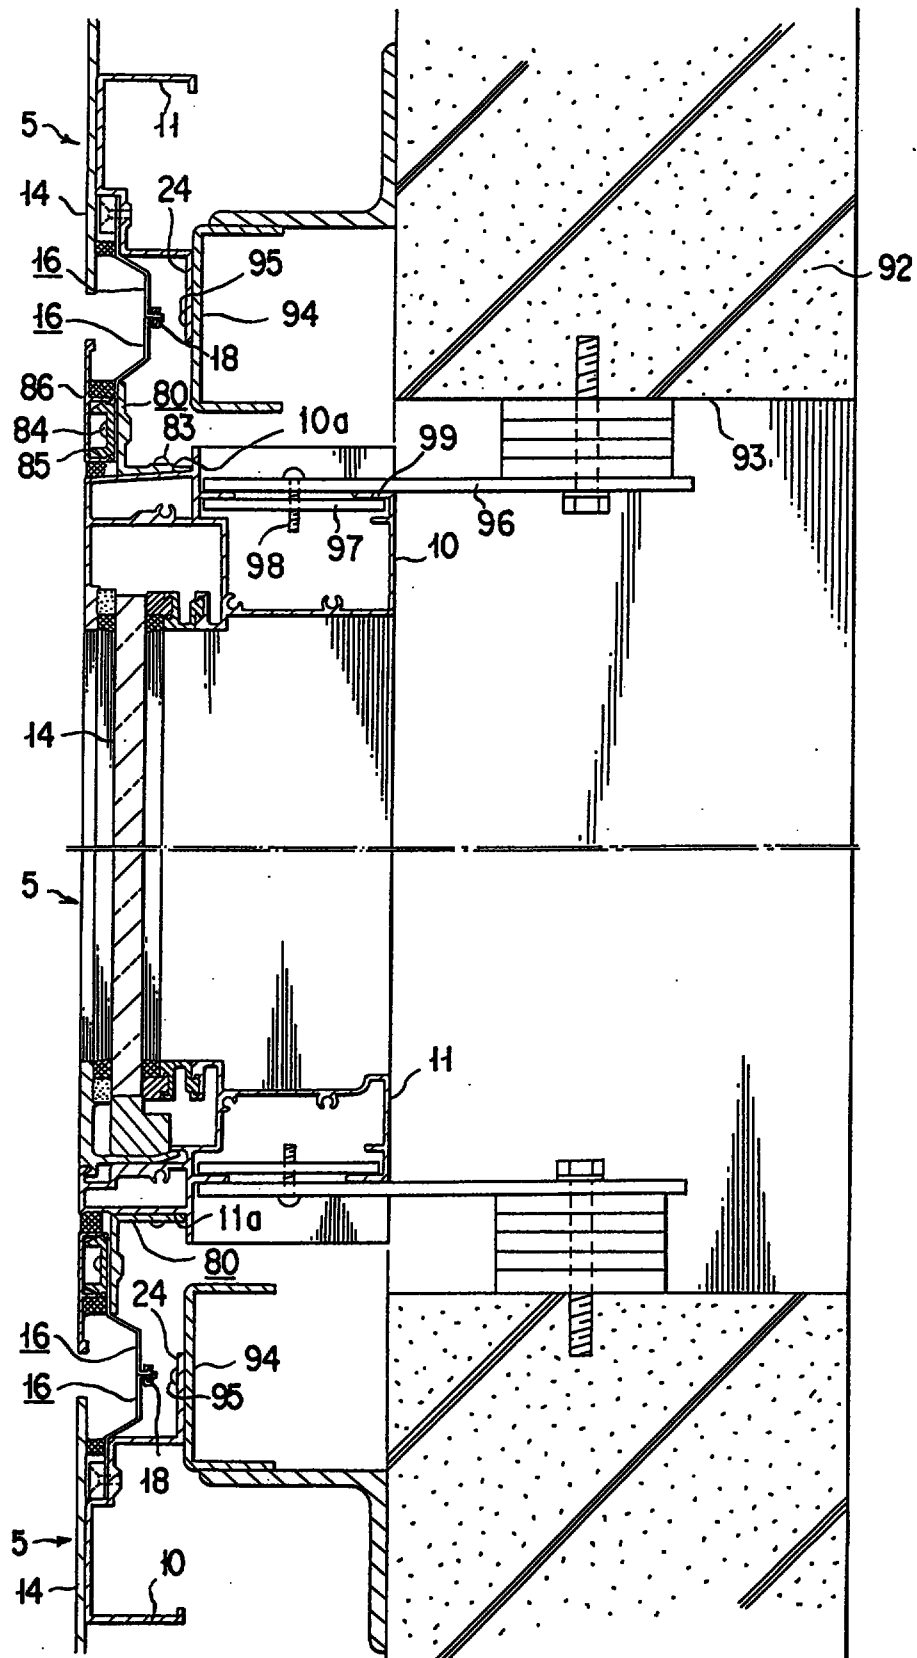

REPLACEMENT
18 MAR 1997

- 25 -

FIG. 25


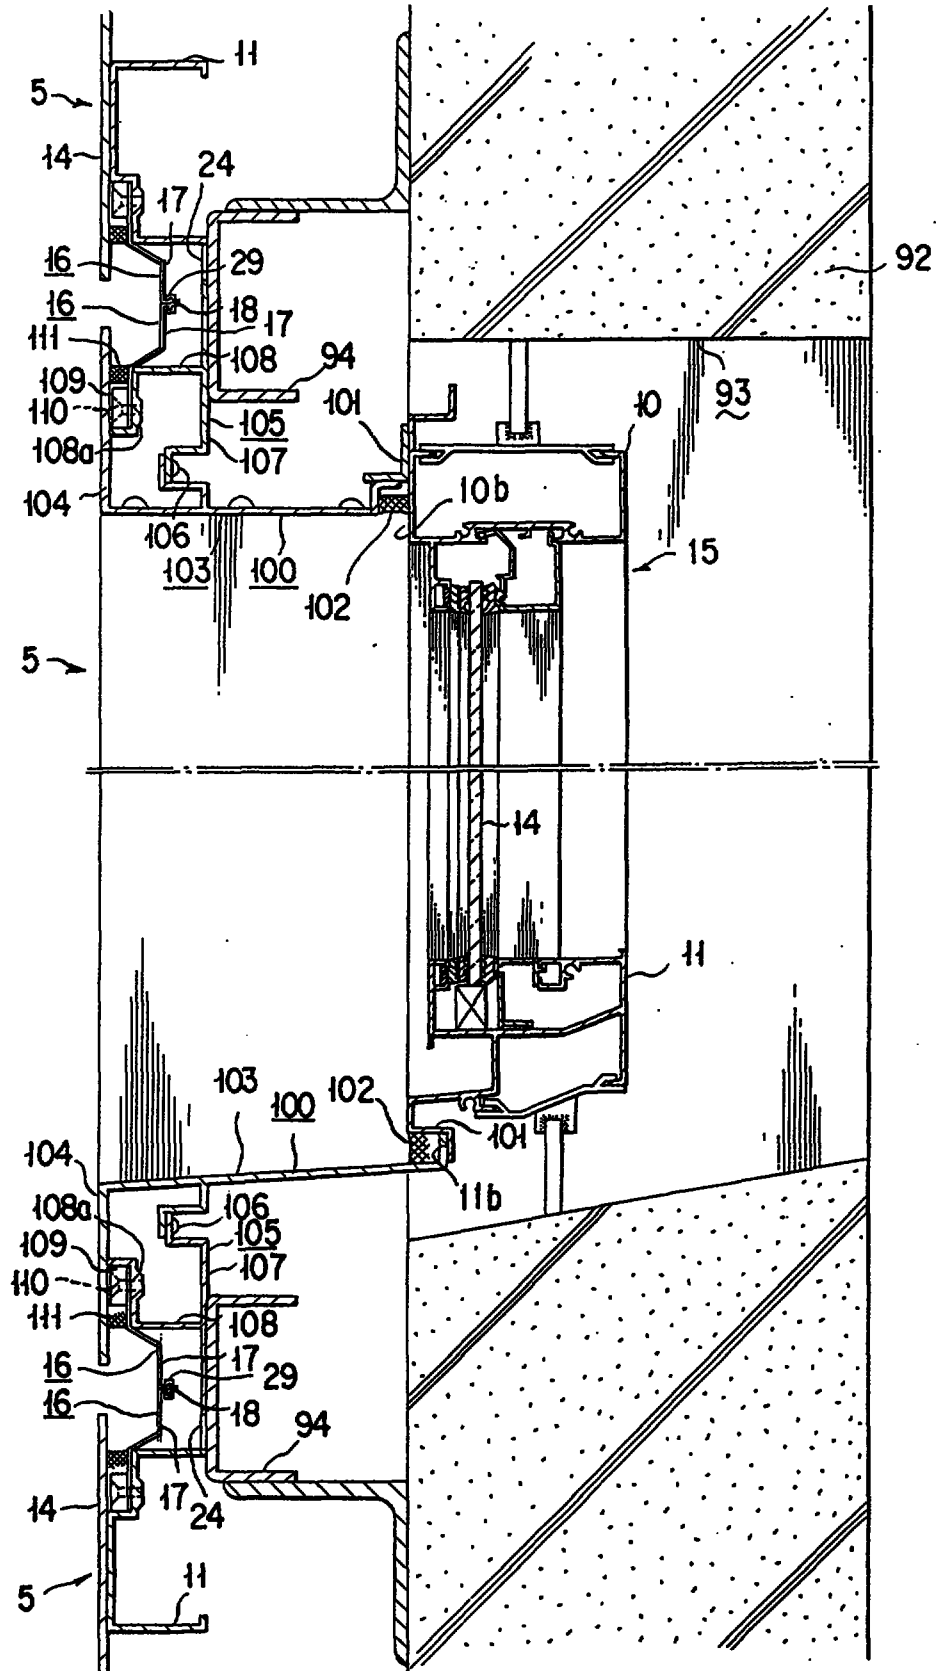



FIG. 26

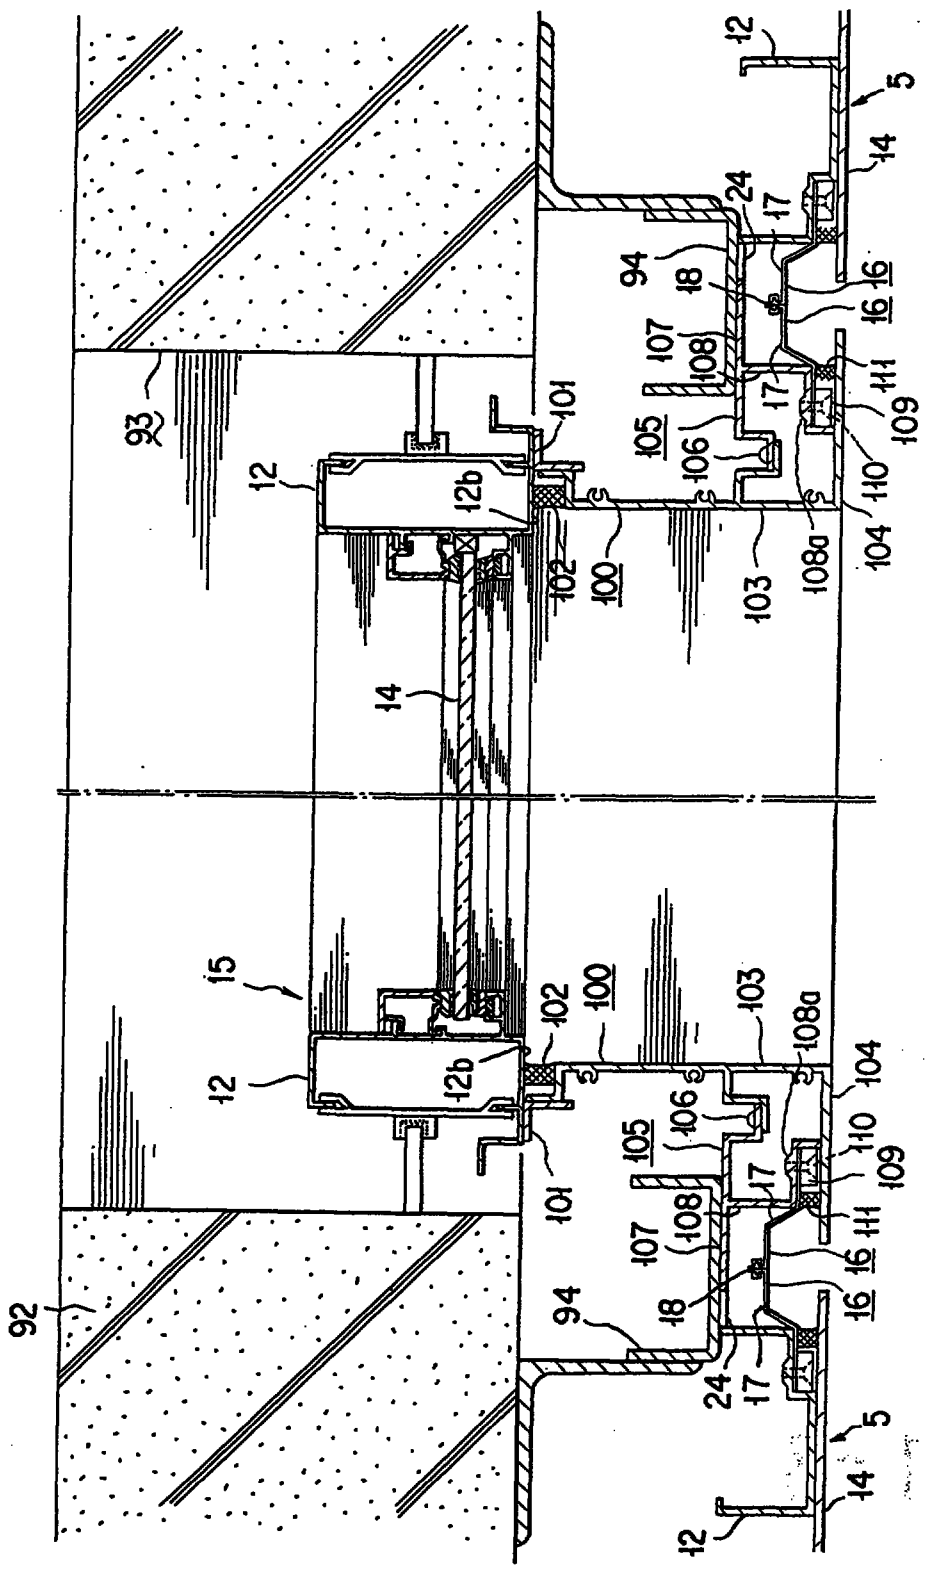

It is, therefore, an object of the present invention to provide cladding units or facing units and a seal structure for the joints thereof which are liberated from the problems mentioned above.

5 In accordance with one aspect of the present invention, there is provided a cladding unit which comprises a cladding member comprised of a framework and a face member attached to one side face thereof and fastener stringers for a waterproof slide fastener attached one each to the outer lateral parts of
10 the cladding member, the fastener stringers mentioned above each comprising a waterproof tape and an engaging part provided with a multiplicity of coupling elements attached to the waterproof tape and spaced at fixed intervals along one longitudinal edge thereof, the end parts of the waterproof
15 tapes of all adjoining fastener stringers being integrally joined, and the joined corner parts of the waterproof tapes protruding from the corner parts of the framework. According to this structure, the joint between two adjoining cladding units can be infallibly sealed by uniting the opposed fastener
20 stringers of the cladding units with a slider and the gap between the framework and each of the fastener strings can be sealed so securely as to prevent rainwater from leaking through the corner parts of the framework.

25 In a preferred mode of this aspect of the invention, the engaging part of the fastener stringers mentioned above is so formed that one end part thereof will protrude from one end part of the waterproof tape in the direction of length thereof. When the opposed fastener stringers of the adjoining



REPLACEMENT SHEETS		SG
☒	Description	: paged 1 to paged 5
☒	Claim(s)	: paged 2 to paged 3
☐	Drawing(s)	: paged 4 to paged 4
☒	Abstract	: paged 5 to paged 5
DATE OF RECEIPT		- 1 DEC 1997

cladding units are to be united, therefore, the insertion thereof into a slider is facilitated because the relevant engaging parts protruding on one end side thereof from the corresponding waterproof tapes can be drawn out from between
5 the adjoining cladding units and inserted into the slide groove of the slider.

Another aspect of the present invention consists in providing a seal structure for the joint to be formed between the opposed frameworks of the cladding units mutually adjoined
10 and attached to the backing member of the building.

In a basic mode of this aspect of the invention, the joint formed between the adjoining cladding units is sealed by coupling the engaging parts of the opposed fastener stringers of the cladding units. The gaps formed between the end parts
15 of the fastener stringers, for example, at the cruciform joint due to the intersection of a lateral joint and a vertical joint and at the T-shaped joint due to the T-shaped adjoining of three cladding units are sealed by either attaching the relevant waterproof sheets through the medium of an adhesive
20 agent or by means of thermal welding to the joined corner parts of the waterproof tapes of the fastener stringers protruding from the corner parts of the frameworks of the cladding units or by further filling the joined corner parts with a wet sealing material.

25 As another mode of the seal structure, a seal structure is provided which is capable of sealing the end-part joint between the end parts of a first and a second cladding unit which adjoin each other and an edge part in an opening of a building

REPLACEMENT SHEET

01 DEC 1997

01 DEC 1997


- 4 -

with a wet sealing material. In one mode of this seal structure, the joint between the first and second cladding units is sealed by coupling the engaging parts of the opposed fastener stringers of the first and second cladding units. In the end part in which the joint between the first and second cladding units confronts the edge part in the opening of the building, the end parts of a pair of opposed fastener stringers of the first and second cladding units are extended to the end parts of the waterproof tapes opposed to the edge part of the building and joined integrally to the end parts of the waterproof tapes thereby connecting the waterproof tapes opposed to the edge part of the building through the medium of the extended parts of the coupled fastener stringers. The waterproof tapes joined as described above and opposed to the edge part of the building and the extended parts of the fastener stringers are bent so that the bent parts are opposed to the edge part of the building. The gaps between the edge part of the building and the bent parts of those of the waterproof tapes and the fastener stringers of the first and second cladding units that are opposed to the edge part of the building are sealed by filling the gaps with the wet sealing material.

In another mode of the seal structure for the end-part joint, the waterproof tapes of the first and second cladding units which are opposed to the edge part in the opening of the building are bent so that the bent parts of the waterproof tapes are opposed to the edge part of the building. A waterproof sheet is disposed as tightly joined over the building edge side end parts of the waterproof tapes of the

coupled fastener stringers and the opposed end parts of the bent waterproof tapes opposed to the edge part of the building so as to cover the gap between the opposed end parts of the bent waterproof tapes. The gaps between the edge part of the building and the waterproof sheet and tapes of the first and second cladding units opposed to the edge part of the building are sealed by filling the gaps with the wet sealing material.

According to yet another mode of the present invention, a seal structure is provided which is capable of sealing the joint to be formed where an obstacle thrusts out from between the first and second cladding units arranged in an adjoining state with a wet sealing material. In this seal structure, depressed parts adapted jointly to conform to the contour of the obstacle are formed one each in the first and second cladding units thereby interrupting the continuity of the fastener stringers in the depressed parts. The waterproof tapes are attached to the surfaces of the depressed parts. The end parts of the waterproof tapes of the depressed parts are joined to the waterproof tapes of the opposed fastener stringers mentioned above. The waterproof tapes are bent such that the bent parts thereof are opposed to the obstacle. The engaging parts of the opposed fastener stringers attached to the first and second cladding units mentioned above are mutually coupled thereby sealing the joints on the opposite sides across the obstacle as the boundary. The gaps between the obstacle and the end parts of the coupled fastener stringers mentioned above and the gaps of the obstacle and the waterproof tapes of the depressed parts are sealed by filling

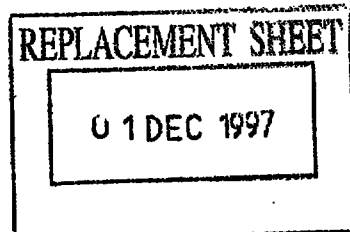



WHAT IS CLAIMED IS:


1. A cladding unit for a building, comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of
5 a waterproof slide fastener attached severally to outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape and spaced at fixed intervals along one longitudinal edge of
10 the tape, said waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework.

2. The cladding unit according to claim 1, wherein
15 one-end part of said engaging part of each of said fastener stringers protrudes from one-end part of said waterproof tape in the longitudinal direction of the tape.

3. The cladding unit according to claim 1 or 2, which has notches formed one each in said joined corner parts of the
20 waterproof tapes so as to interrupt the continuity of said engaging parts of adjoining fastener stringers.

4. A seal structure for a cruciform joint of four vertically and laterally adjoining cladding units attached to a backing member of a building,

25 said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of





- 29 -

said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape and spaced at fixed intervals along one longitudinal edge of the tape, 5 said waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

a lateral joint of said cruciform joint being sealed by 10 coupling said engaging parts of said fastener stringers of vertically adjoining cladding units and a vertical joint thereof being sealed by coupling said engaging parts of said fastener stringers of laterally adjoining cladding units; and

said cruciform joint due to the intersection of said 15 lateral joint and said vertical joint having a waterproof sheet disposed as tightly attached over joined corner parts of said waterproof tapes of said fastener stringers.

5. The seal structure according to claim 4, wherein said waterproof sheet is a cruciform sheet made of a silicone resin.

20 6. A seal structure for a T-shaped joint formed by first and second cladding units arranged as mutually adjoined and a third cladding unit arranged astraddle said two adjoining cladding units, all cladding units being attached to a backing member of a building;

25 said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of

REPLACEMENT SHEET

01 DEC 1997



- 30 -

said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape and spaced at fixed intervals along one longitudinal edge of the tape, 5 said waterproof tapes of adjoining fastener stringers being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;


a first joint between said first and second cladding units 10 being sealed by coupling the engaging parts of opposed fastener stringers of said adjoining first and second cladding units, a second joint between said first and third cladding units and a third joint between said second and third cladding units being severally sealed by coupling the engaging parts of said 15 fastener stringers of said first and second cladding units to the opposite engaging part of said fastener stringer of said third cladding unit; and

said T-shaped joint due to the intersection of said first, second, and third joints having a waterproof sheet disposed as 20 tightly attached over joined corner parts of said waterproof tapes of said fastener stringers.

7. The seal structure according to claim 6, wherein said waterproof sheet is a T-shaped sheet made of a silicone resin.

8. The seal structure according to claim 6 or 7, wherein 25 the fastener stringer of said third cladding unit has a notch positioned in the intersection of said first, second, and third joints.

9. A seal structure for an end-part joint between an edge





- 31 -


part in an opening of the building and end parts of first and second cladding units attached as mutually adjoined to a backing member of said building,

5 said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework, at least one waterproof tape attached to an outer lateral part of said cladding member to be opposed to the edge part in the opening of the building, and fastener stringers of a waterproof slide fastener attached severally to 10 remaining outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape and spaced at fixed intervals along one longitudinal edge of the tape, said waterproof tapes being 15 integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

the end parts of opposed fastener stringers of said first and second cladding units being extended to end parts of the 20 waterproof tapes opposed to said edge part in the opening of said building and joined integrally to the end parts of the waterproof tapes;

a joint between said first and second cladding units being sealed by coupling the engaging parts of opposed fastener 25 stringers of said first and second cladding units;

said waterproof tapes opposed to said edge part in the opening of said building and said extended parts of said coupled fastener stringers being bent so that the bent parts

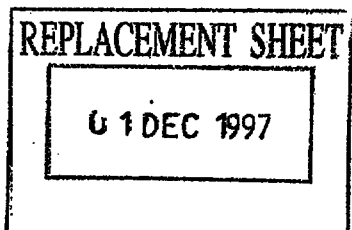



- 32 -

are opposed to said edge part in the opening of said building;
and


the gap between said edge part in the opening of said building and said bent parts of said waterproof tapes and
5 coupled fastener stringers being sealed by filling said gap with a wet sealing material.

10. The seal structure according to claim 9, wherein said waterproof tape attached to said cladding member is replaced by said fastener stringer.

10 11. A seal structure for an end-part joint between an edge part in an opening of a building and end parts of first and second cladding units attached as mutually adjoined to a backing member of said building,

said cladding units each comprising a cladding member
15 comprised of a framework and a face member attached to one side face of the framework, at least one waterproof tape attached to an outer lateral part of said cladding member to be opposed to the edge part in the opening of the building, and fastener stringers of a waterproof slide fastener attached severally to
20 remaining outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape and spaced at fixed intervals along one longitudinal edge of the tape, said adjoining waterproof tapes
25 being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

a joint between said first and second cladding units being

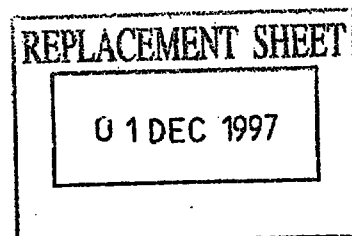



- 33 -

sealed by coupling the engaging parts of opposed fastener stringers of said first and second cladding units;

those of said waterproof tapes of said first and second cladding units that are opposed to said edge part in the opening of said building being bent so that the bent parts are opposed to said edge part in the opening of said building;


a waterproof sheet being disposed as tightly attached to at least end parts of opposed fastener stringers of said first and second cladding units adjoining said waterproof tapes and of said waterproof tapes; and

the gap between said edge part in the opening of said building and said waterproof tapes and said waterproof sheet being sealed by filling said gap with a wet sealing material.

12. The seal structure according to claim 11, wherein said waterproof tape attached to said cladding member is replaced by said fastener stringer.

13. A seal structure for a joint to be formed where an obstacle thrusts out from between a first and a second cladding unit attached as mutually adjoined to a backing member of a building,

said cladding units each comprising a cladding member comprised of a framework and a face member attached to one side face of the framework and fastener stringers of a waterproof slide fastener attached severally to outer lateral parts of said cladding member, said fastener stringers each comprising a waterproof tape and an engaging part having a plurality of coupling elements attached to said waterproof tape and spaced at fixed intervals along one longitudinal edge of the tape,





- 34 -

said adjoining waterproof tapes being integrally connected, and joined corner parts of said waterproof tapes protruding outwardly from the corner parts of said framework;

5 said first and second cladding units each having a depressed part jointly conforming to the contour of said obstacle and being provided on the opposite parts thereof across said depressed parts with fastener stringers having the continuity thereof interrupted in said depressed part;


10 waterproof tapes being attached to surfaces of said depressed parts;

said waterproof tapes being bent so that the bent parts are opposed to said obstacle;

said waterproof tapes in said depressed parts being joined to end parts of the waterproof tapes of said fastener stringers;

15 joints on the opposite sides across said obstacle as a boundary being severally sealed by coupling the engaging parts of said opposed fastener stringers attached to said first and second cladding units; and

20 gaps between said obstacle and end parts of said connected fastener stringers and said waterproof tapes in said depressed parts being sealed by filling said gaps with a wet sealing material.

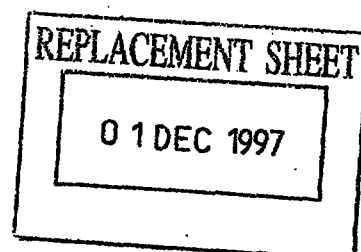

ABSTRACT OF THE DISCLOSURE

Cladding units (5) for a building (1) and a seal structure for the joints thereof are disclosed. A cladding unit (5) comprises a cladding member (15) comprised of a framework (13) and a face member (14) attached to one side face thereof and fastener stringers (16) for a waterproof slide fastener attached one each to the outer lateral parts of the cladding member (15), the fastener stringers (16) each comprising a waterproof tape (17) and an engaging part (18) provided with a multiplicity of coupling elements (19) attached to the waterproof tape (17) and spaced at fixed intervals along one longitudinal edge thereof, the end parts of the waterproof tapes (17) of all adjoining fastener stringers (16) being integrally joined, and the joined corner parts (17b) of the waterproof tapes (17) protruding from the corner parts of the framework (13). The joint formed between the adjoining cladding units (5) is sealed by coupling the engaging parts (18) of the opposed fastener stringers (16) of the cladding units (5). The gaps formed between the end parts of the fastener stringers are sealed by attaching the relevant waterproof sheets (32, 35, 43) through the medium of an adhesive agent (33, 36) or by means of thermal welding to the joined corner parts (17b) of the waterproof tapes (17) of the fastener stringers (16) protruding from the corner parts of the frameworks (13) of the cladding units (5).

(Fig. 2)

