



[図1]

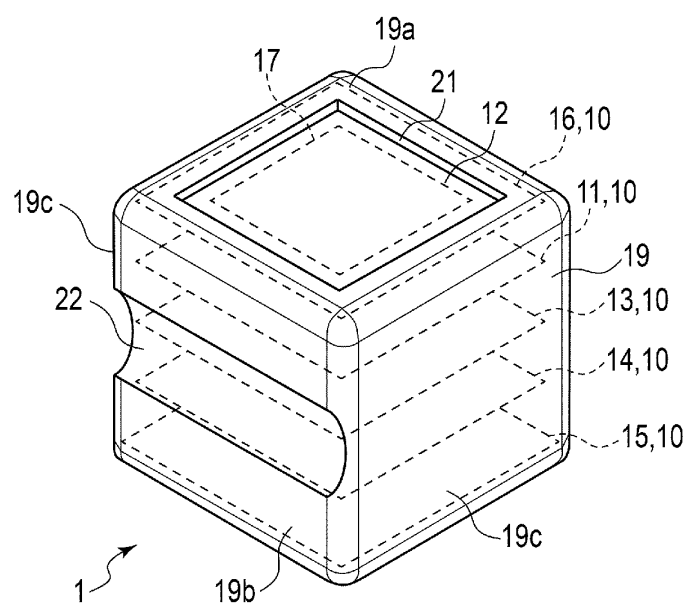


[図2]

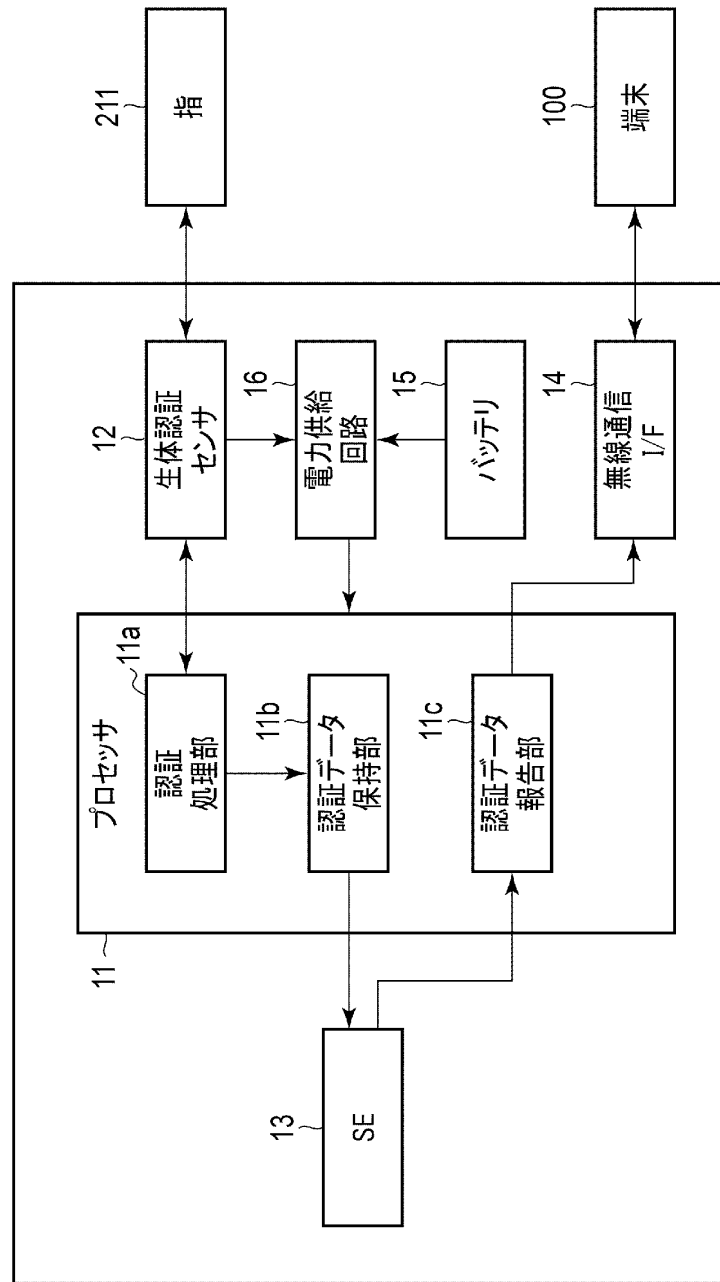


The block diagram shows a portable device 10. At the top, a finger 211 is shown touching a biometric authentication sensor 12. The sensor 12 is connected to a control unit 19. The control unit 19 contains three main components: an authentication processing unit 11a, an authentication data holding unit 11b, and an authentication data reporting unit 11c. A power source 15 is connected to the sensor 12 and the control unit 19. A switch 16 is also connected to the sensor 12 and the control unit 19.


[図5]

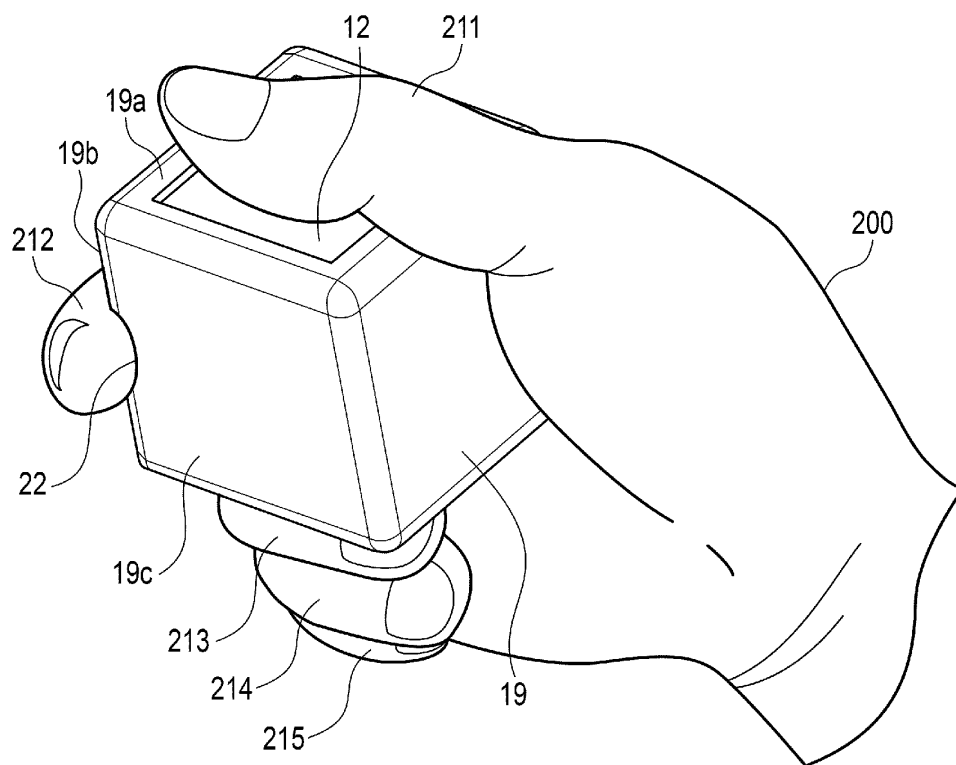


[図6]

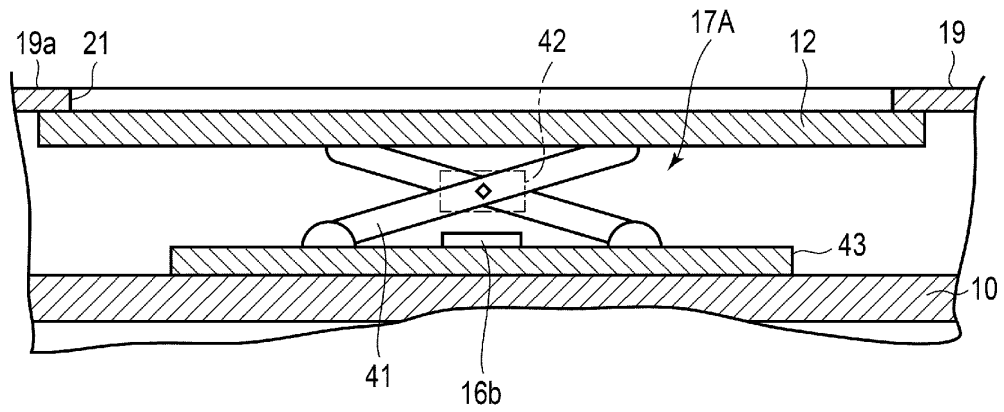

[図7]

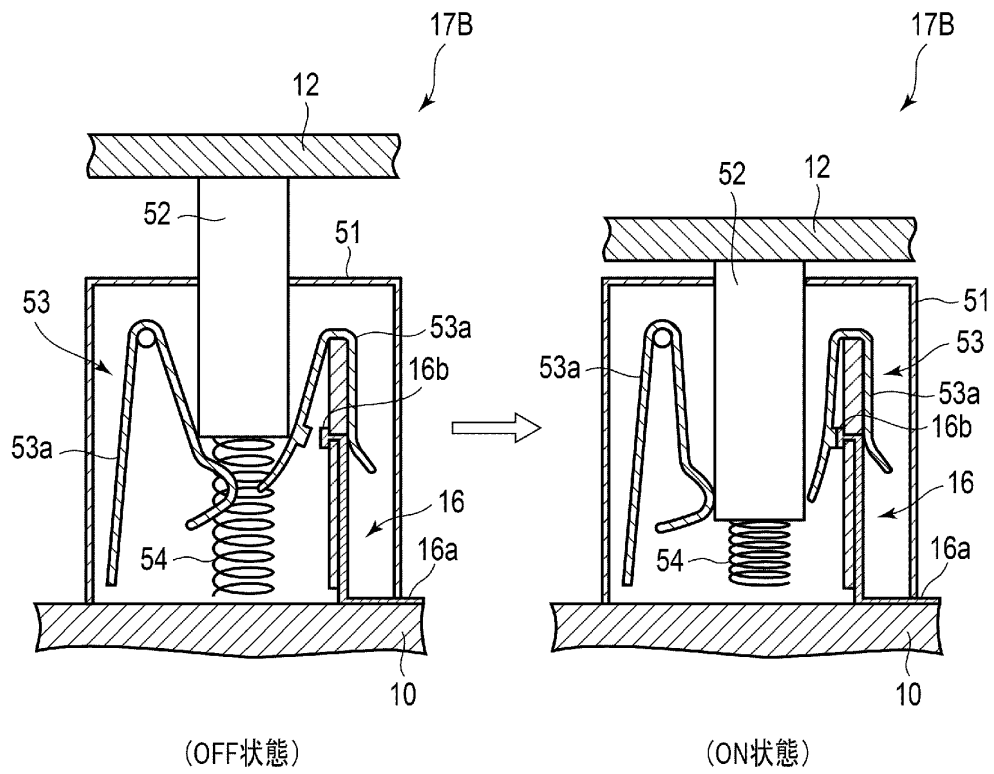

[図8]

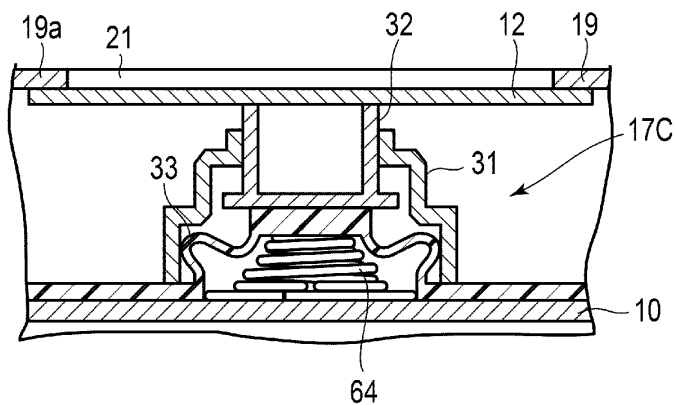

【图9】

