



(51) International Patent Classification:
H04W 76/30 (2018.01)

(21) International Application Number:
PCT/CN2020/075109

(22) International Filing Date:
13 February 2020 (13.02.2020)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **ZTE CORPORATION** [CN/CN]; ZTE Plaza,
Keji Road South, Hi-Tech Industrial Park, Nanshan, Shen-
zhen, Guangdong 518057 (CN).

(72) Inventors: **HAN, Jiren**; ZTE Plaza, Keji Road South,
Hi-Tech Industrial Park, Nanshan, Shenzhen, Guangdong
518057 (CN). **GAO, Yin**; ZTE Plaza, Keji Road South,
Hi-Tech Industrial Park, Nanshan, Shenzhen, Guangdong
518057 (CN).

(74) Agent: **BEYOND ATTORNEYS AT LAW**; F6, Xijin
Centre, 39 Lianhuachi East Rd., Haidian District, Beijing
100036 (CN).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: METHODS AND DEVICES FOR DATA TRANSMISSION BASED ON SWITCHING QUALITY OF SERVICE FLOW

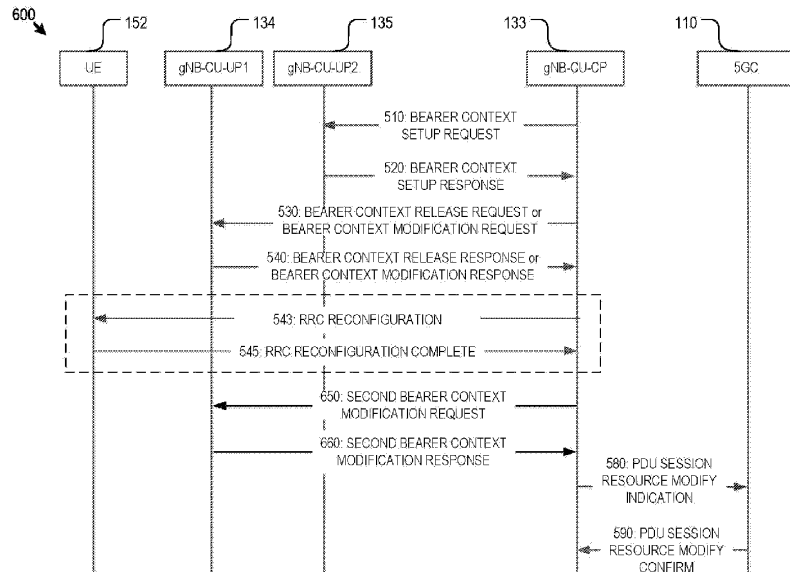


FIG. 6

(57) Abstract: The present disclosure describes methods, system, and devices for switching a quality of service (QoS) flow from a source network node to a target network node. The method includes sending, by a first network node, a first request to the target network node; receiving, by the first network node, a first response to the first request from the target network node; and sending, by the first network node, a second request to the source network node. The method may also include receiving, by the first network node, a second response to the second request from the source network node; and sending, by the first network node, a radio resource control (RRC) reconfiguration complete indication to the source network node.

[Continued on next page]



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)*