



(51) International Patent Classification:
G11C 11/16 (2006.01)

(21) International Application Number:
PCT/SG2011/000175

(22) International Filing Date:
4 May 2011 (04.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
201003157-3 4 May 2010 (04.05.2010) SG

(71) Applicant (for all designated States except US): **AGENCY FOR SCIENCE, TECHNOLOGY AND RESEARCH** [SG/SG]; 1 Fusionopolis Way #20-10, Connexis, Singapore 138632 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SBIAA, Rachid** [MA/SG]; DSI Building, 5 Engineering Drive 1, Singapore 117608 (SG). **LAW, Yaozhang, Dean Randall** [SG/SG]; DSI Building, 5 Engineering Drive 1, Singapore 117608 (SG). **PIRAMANAYAGAM, Seidikkurippu Nellainayagam** [SG/SG]; DSI Building, 5 Engineering Drive 1, Singapore 117608 (SG).

(74) Agent: **VIERING, JENTSCHURA & PARTNER LLP**; P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A MAGNETORESISTIVE DEVICE

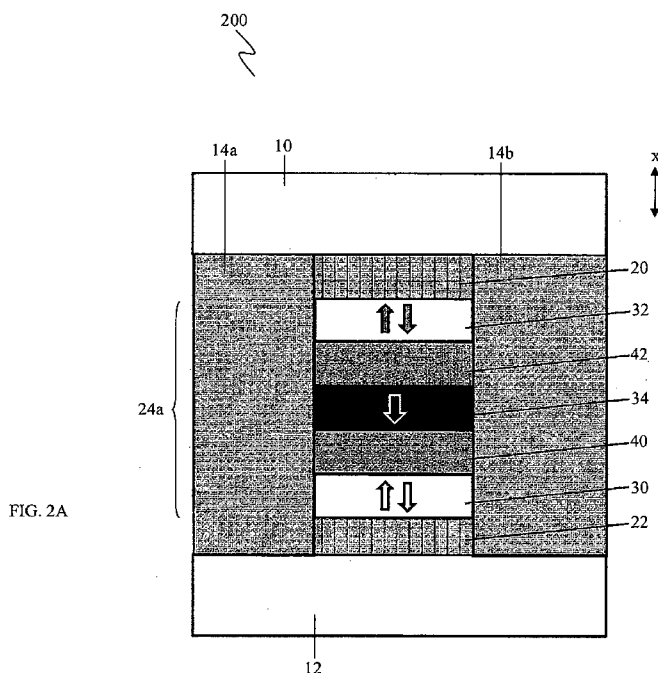

(57) Abstract: According to embodiments of the present invention, a magnetoresistive device having a magnetic junction is provided. The magnetic junction includes at least one fixed magnetic layer structure having a fixed magnetization orientation; and at least two free magnetic layer structures, each of the at least two free magnetic layer structures having a variable magnetization orientation; wherein the at least one fixed magnetic layer structure overlaps with the at least two free magnetic layer structures such that a current flow is possible through the magnetic junction; and wherein the at least one fixed magnetic layer structure and the at least two free magnetic layer structures are respectively configured such that the fixed magnetization orientation and the variable magnetization orientation are oriented in a direction substantially perpendicular to a plane defined by an interface between the at least one fixed magnetic layer structure and either one of the at least two free magnetic layer structures.