

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048824 A3

(51) International Patent Classification⁷: **F16H 57/08**,
3/72, B60K 1/00

(21) International Application Number:
PCT/US2003/037753

(22) International Filing Date:
21 November 2003 (21.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/429,276 25 November 2002 (25.11.2002) US

(71) Applicant and

(72) Inventor: **TESAR, Delbert** [US/US]; 8005 Two Coves
Drive, Austin, TX 78730 (US).

(74) Agents: **EMANUELSON, Kenneth, T.** et al.; 1601 Elm
Street, Suite 3000, Dallas, TX 75201 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(88) Date of publication of the international search report:
26 August 2004

[Continued on next page]

(54) Title: STANDARDIZED ROTARY ACTUATOR

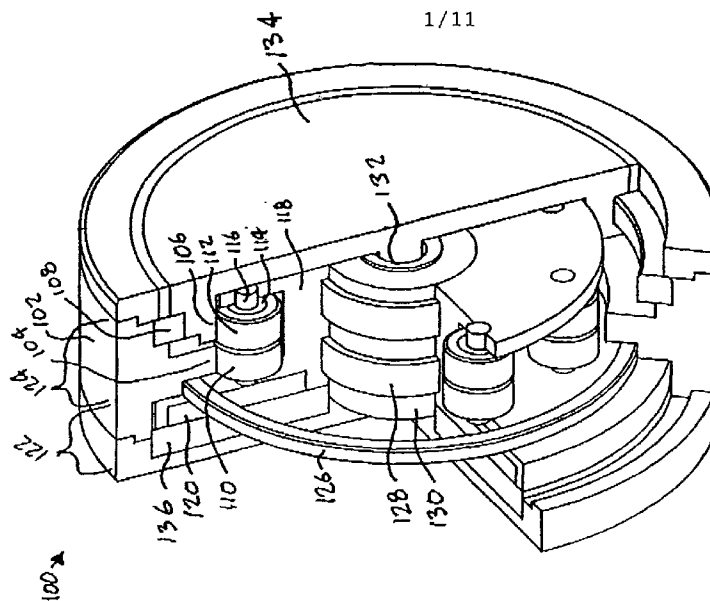

1 / 11

(57) Abstract: A rotary actuator incorporating a shell, an output plate and a cross-roller bearing retaining the output plate within the shell. A prime mover, disposed within the shell, exerts torque on a gear train within the shell. A pair of gears, disposed on either side of the cross-roller bearing, mesh with one or more gears in the geartrain. Depending on the application, the geartrain may be a planetary epicyclic or an eccentric hypocyclic type.

WO 2004/048824 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.