




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A24C 5/18		A1	(11) International Publication Number: WO 98/36650
			(43) International Publication Date: 27 August 1998 (27.08.98)
(21) International Application Number: PCT/GB98/00460		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 13 February 1998 (13.02.98)			
(30) Priority Data: 9703358.3 18 February 1997 (18.02.97) GB			
(71) Applicant (for all designated States except US): BRITISH AMERICAN TOBACCO (INVESTMENTS) LIMITED [GB/GB]; Millbank, Knowle Green, Staines, Middlesex TW18 1DY (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): CLARINGBOULD, Anthony, Craig [GB/GB]; Apartment 1, 10 Forest View, Southampton SO14 2BZ (GB). OLIVER, Richard [GB/GB]; 27 Shirley Park Road, Shirley, Southampton SO16 4FQ (GB).		Published With international search report.	
(74) Agents: MACLEAN, Kenneth, John, Hamson et al. ; British-American Tobacco Company Limited, R & D Centre, Patents Dept., Regents Park Road, Southampton SO15 8TL (GB).			

(54) Title: INCORPORATING SMOKE-MODIFYING AGENTS IN SMOKING MATERIAL RODS

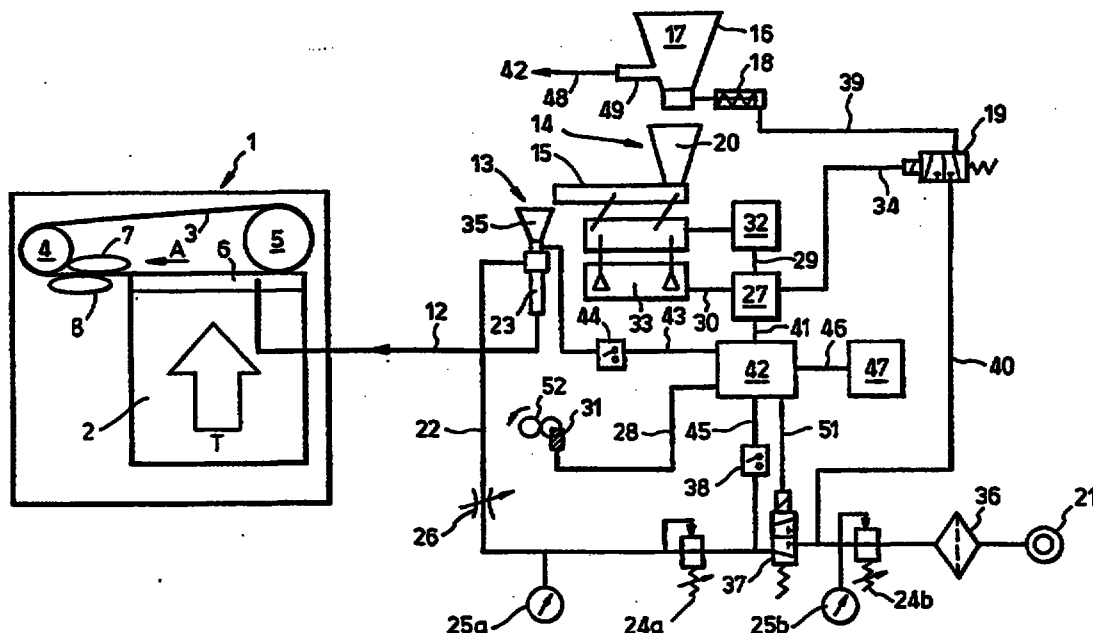

(57) Abstract

A method of, and apparatus for, incorporating particulate smoke-modifying agent in a smoking material rod, wherein said agent is introduced into a flow of filamentary smoking material to the suction band of a rod making machine, the location of introduction being in the vicinity of the suction band of said machine.