

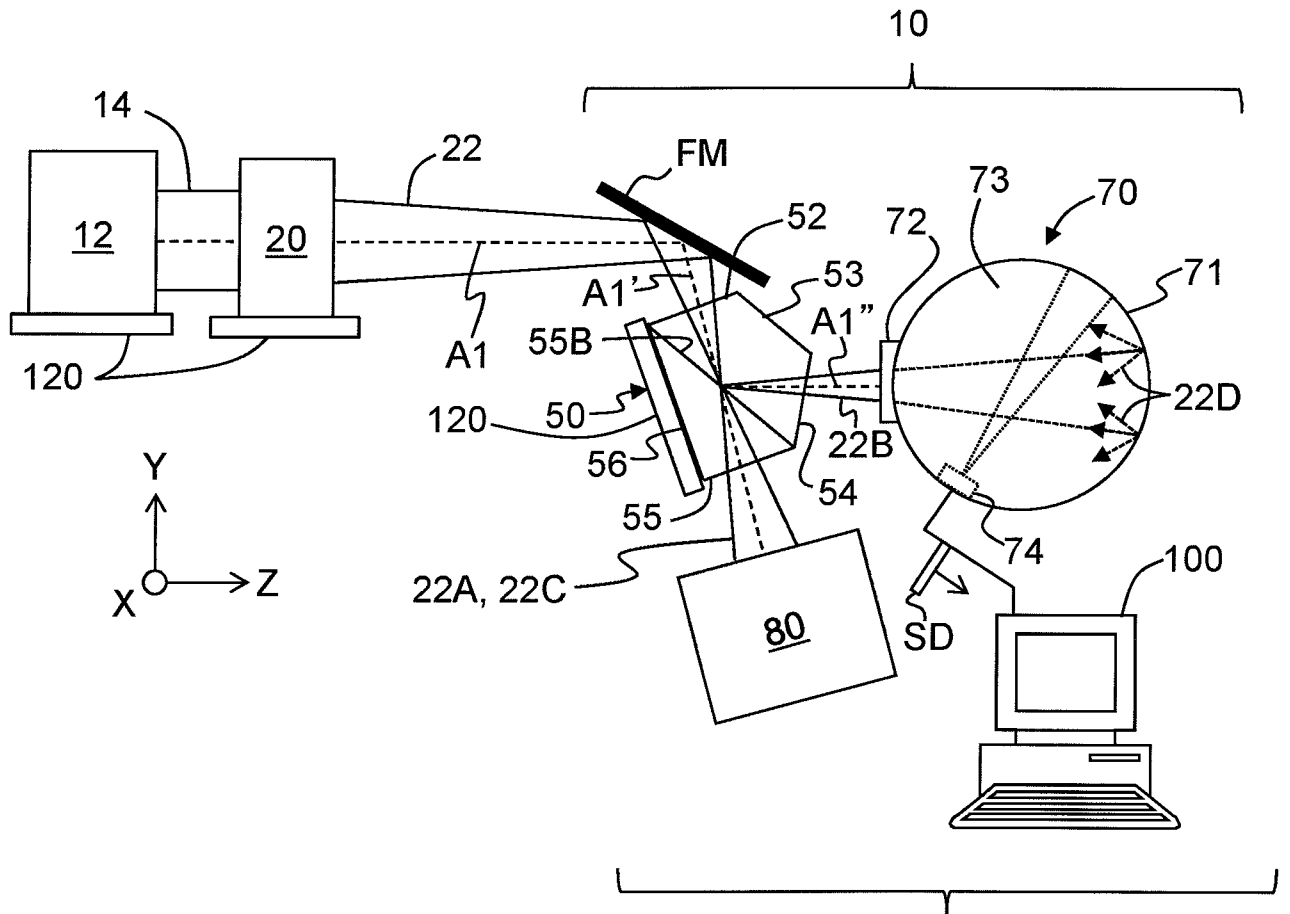
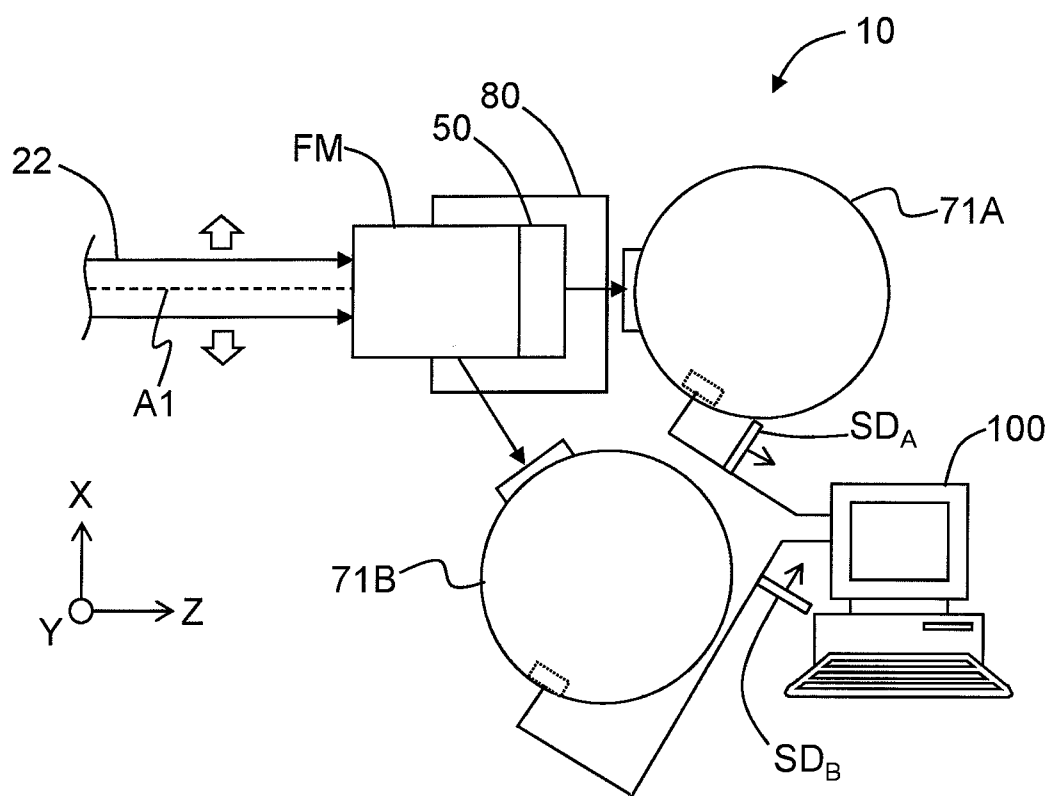
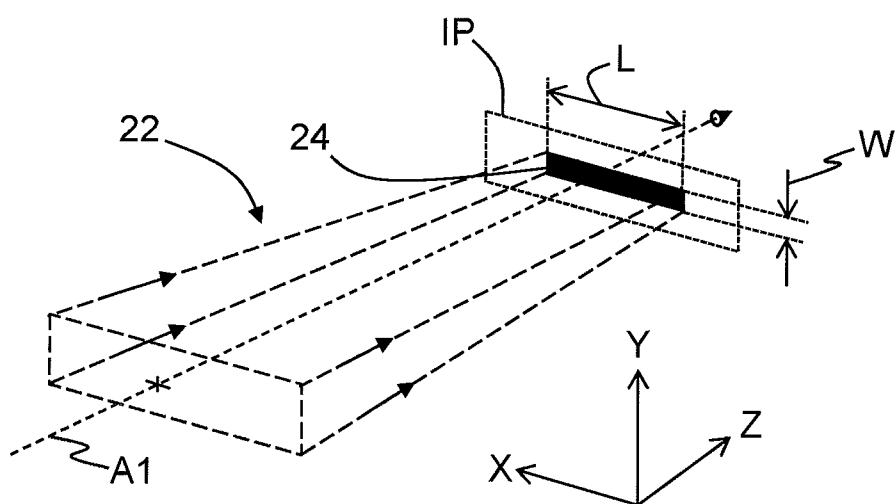


FIG. 1A

**FIG. 1B****FIG. 2**

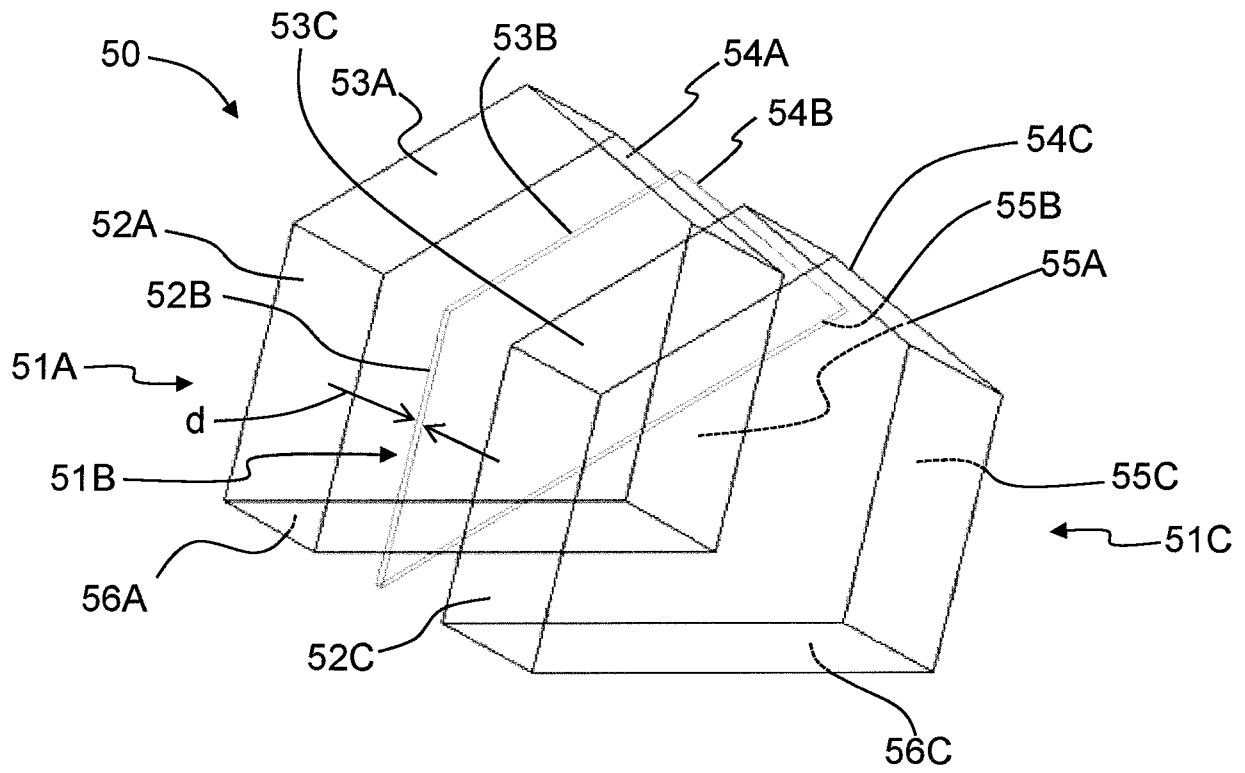
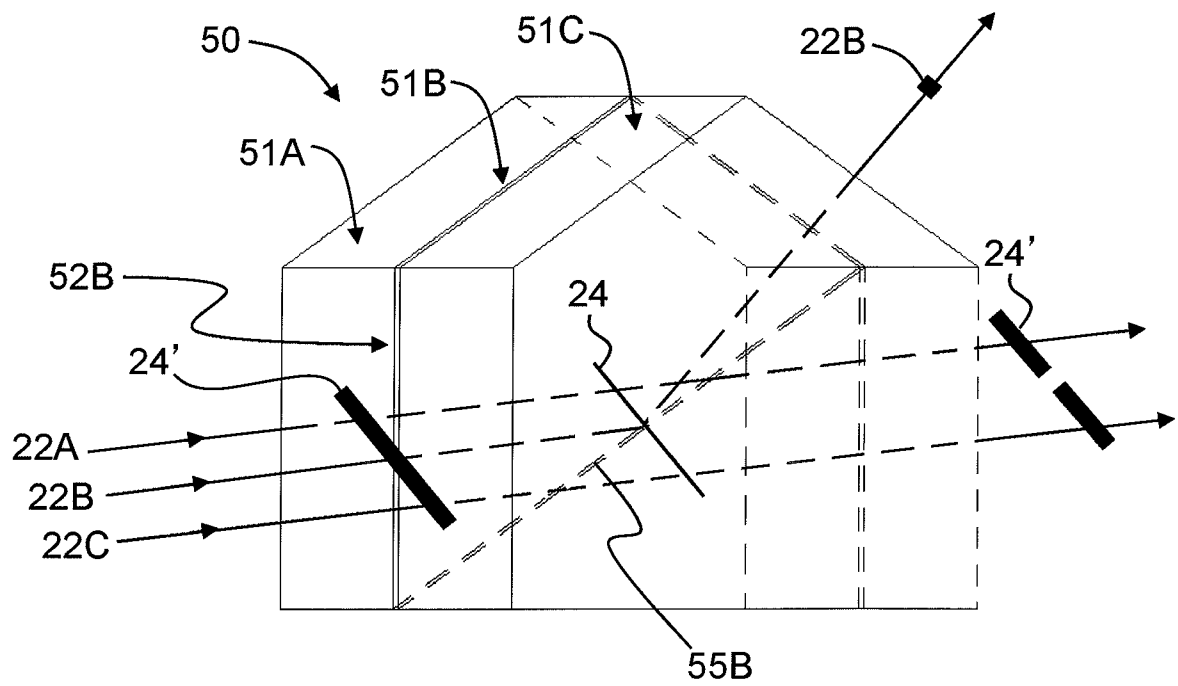
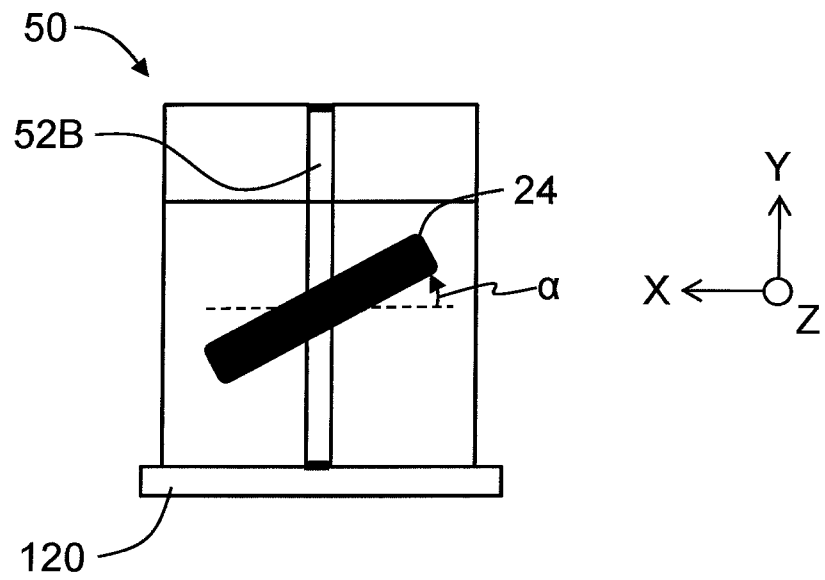
**FIG. 3A****FIG. 3B**

Diagram illustrating a second embodiment of the device. It shows a rectangular frame 50 with a vertical rod 52B passing through its center. A horizontal rod 24' is positioned within the frame, passing through a central black rectangular block. A horizontal arrow labeled AW1 points to the left from the block. A horizontal arrow labeled AW2 points to the right from the bottom of the frame. A horizontal bar 120 is located at the bottom of the frame, below the rod 52B.

FIG. 4B

**FIG. 4C**

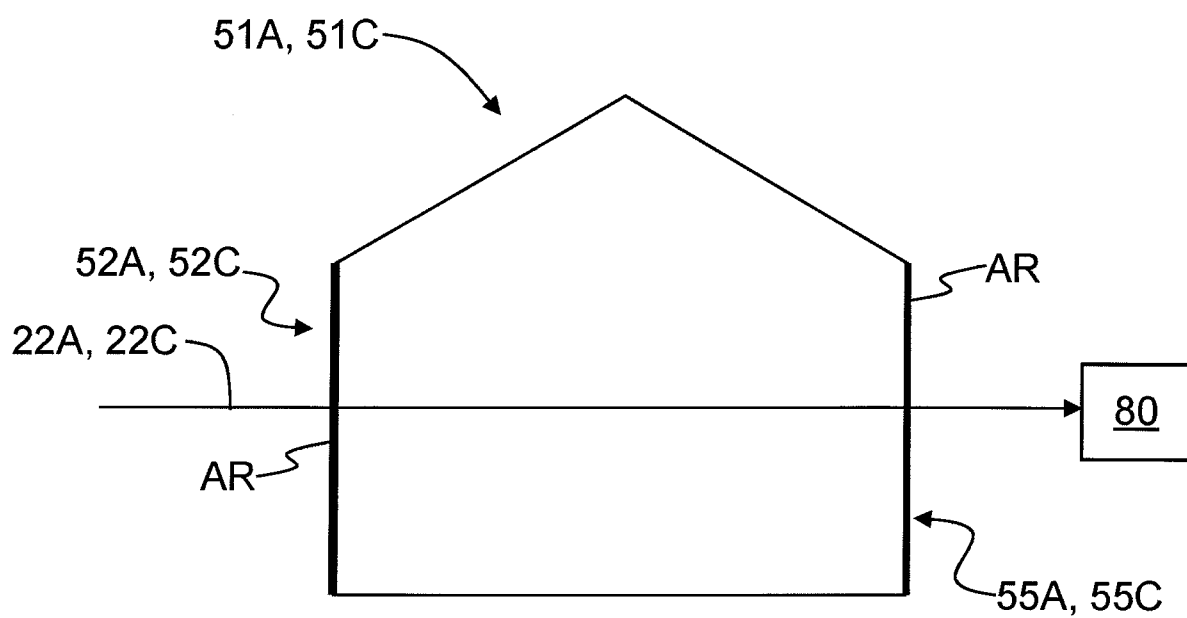


FIG. 5A






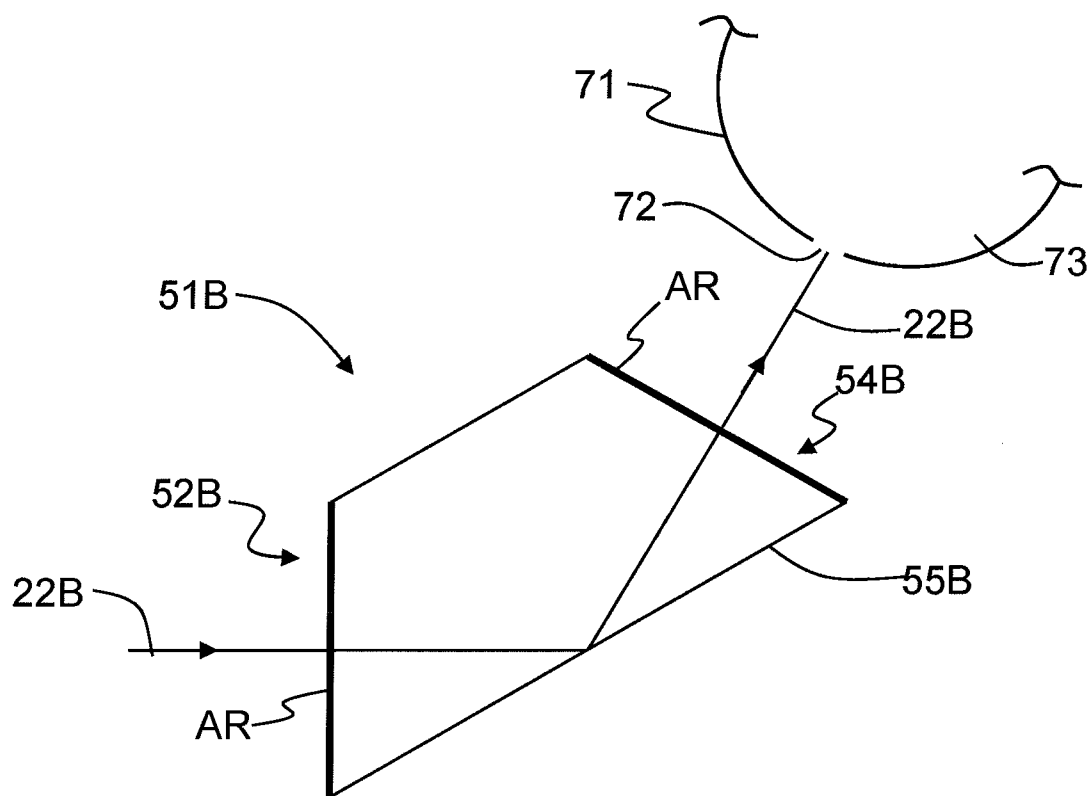



FIG. 5B


**FIG. 6A****FIG. 6B**


**FIG. 7**

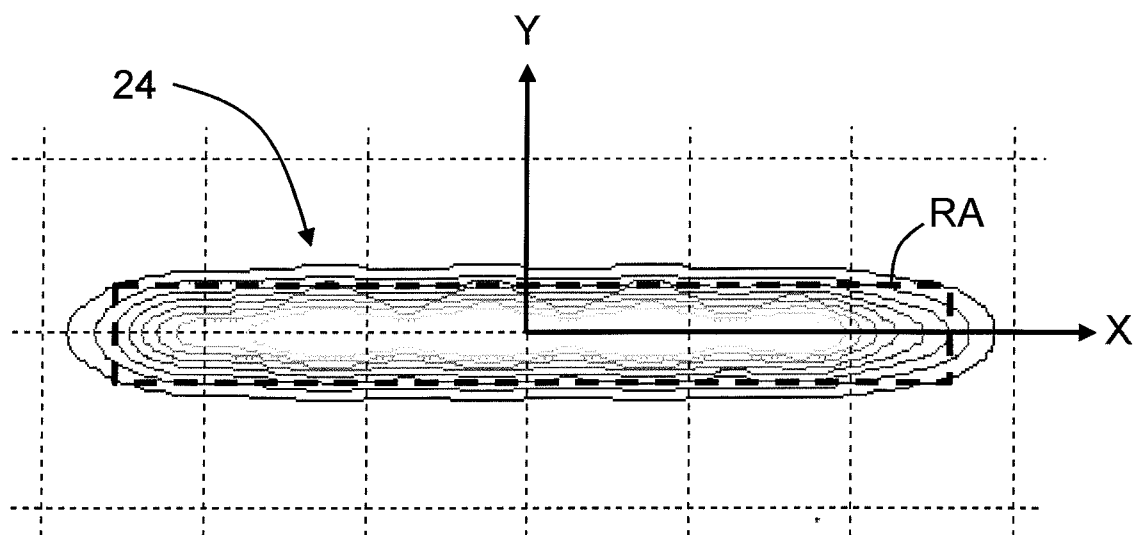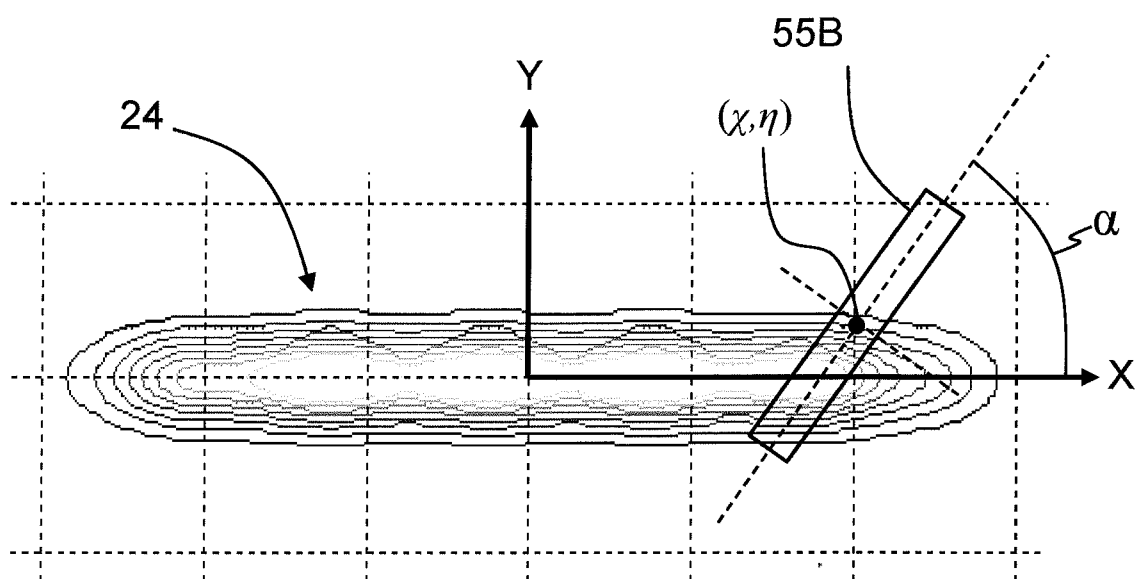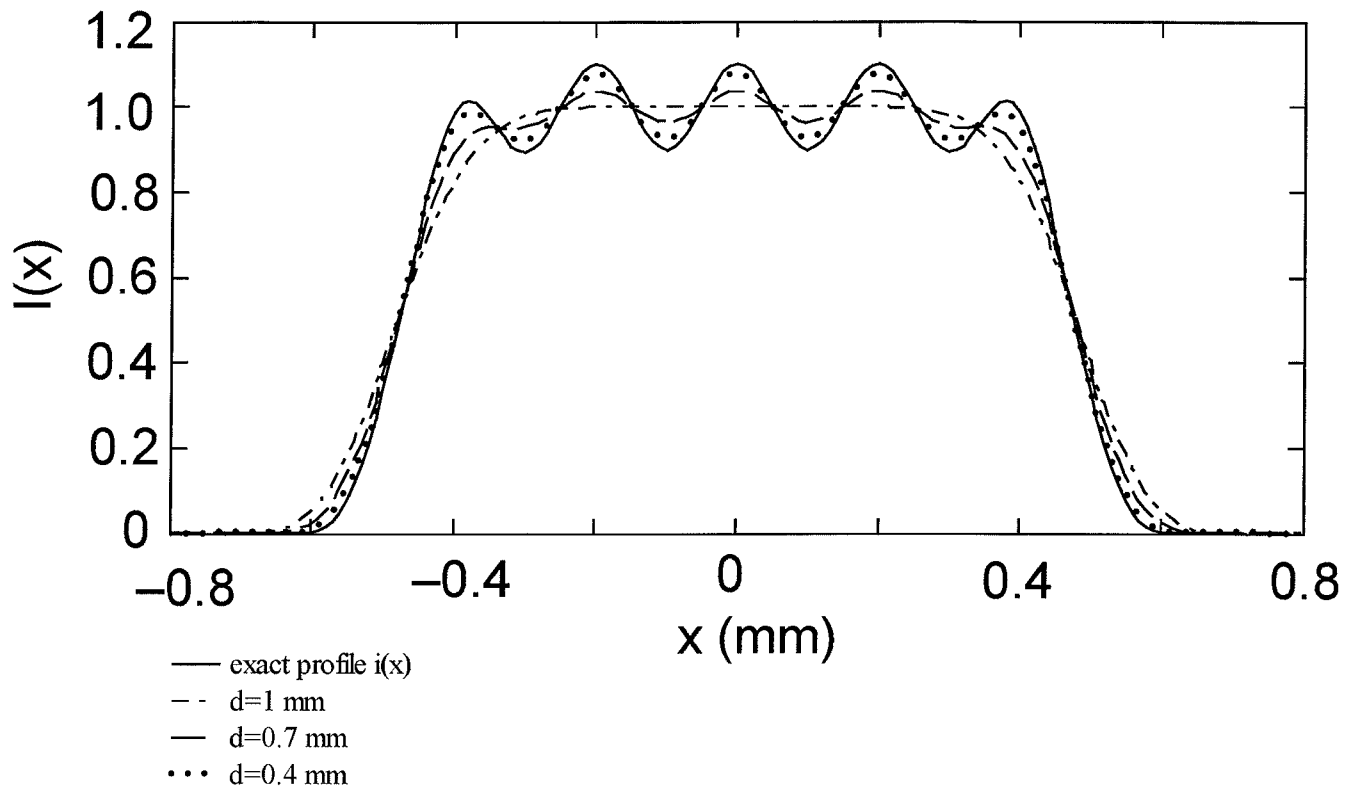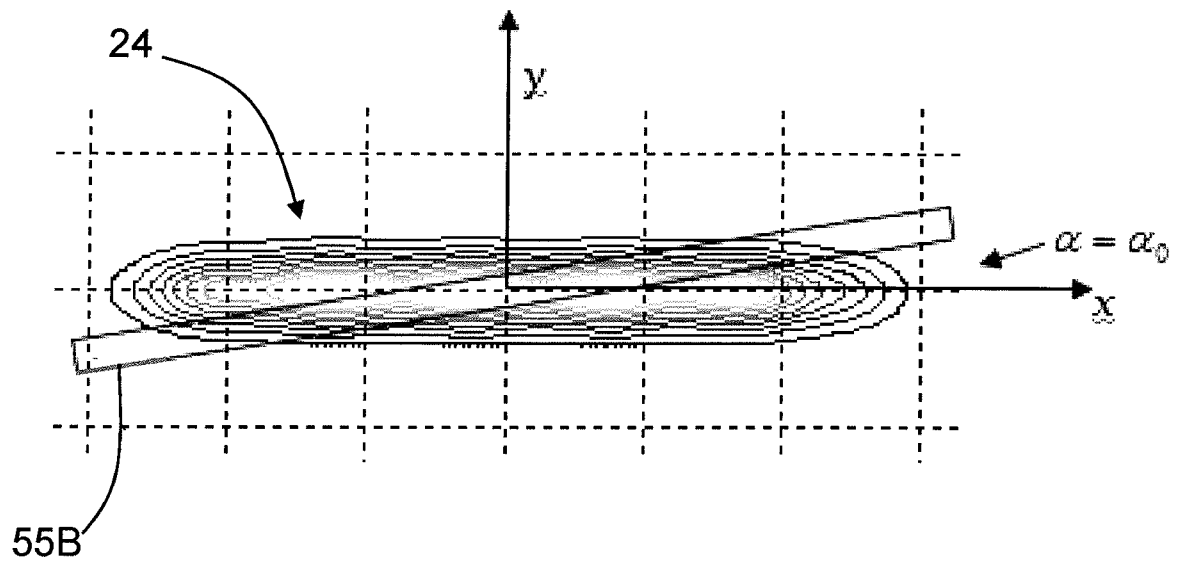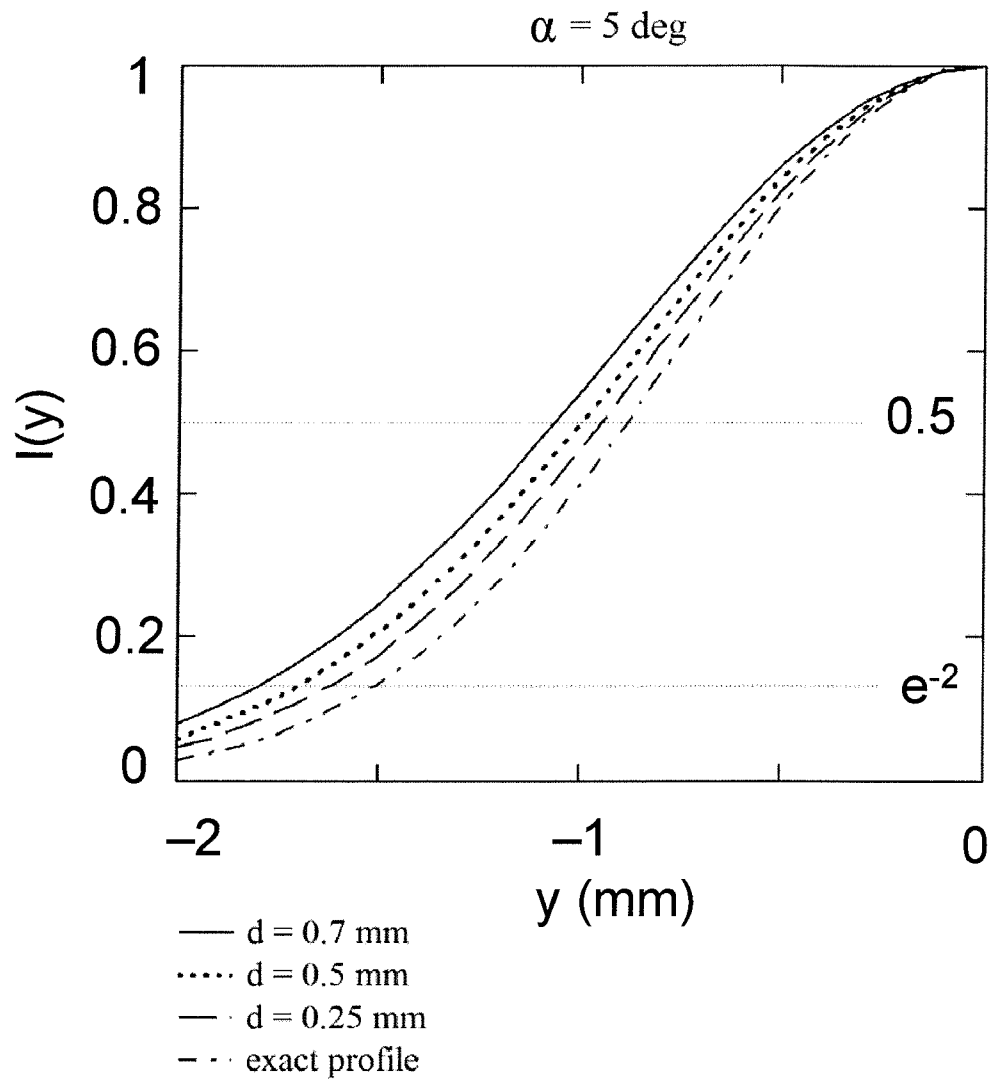

**FIG. 9A**

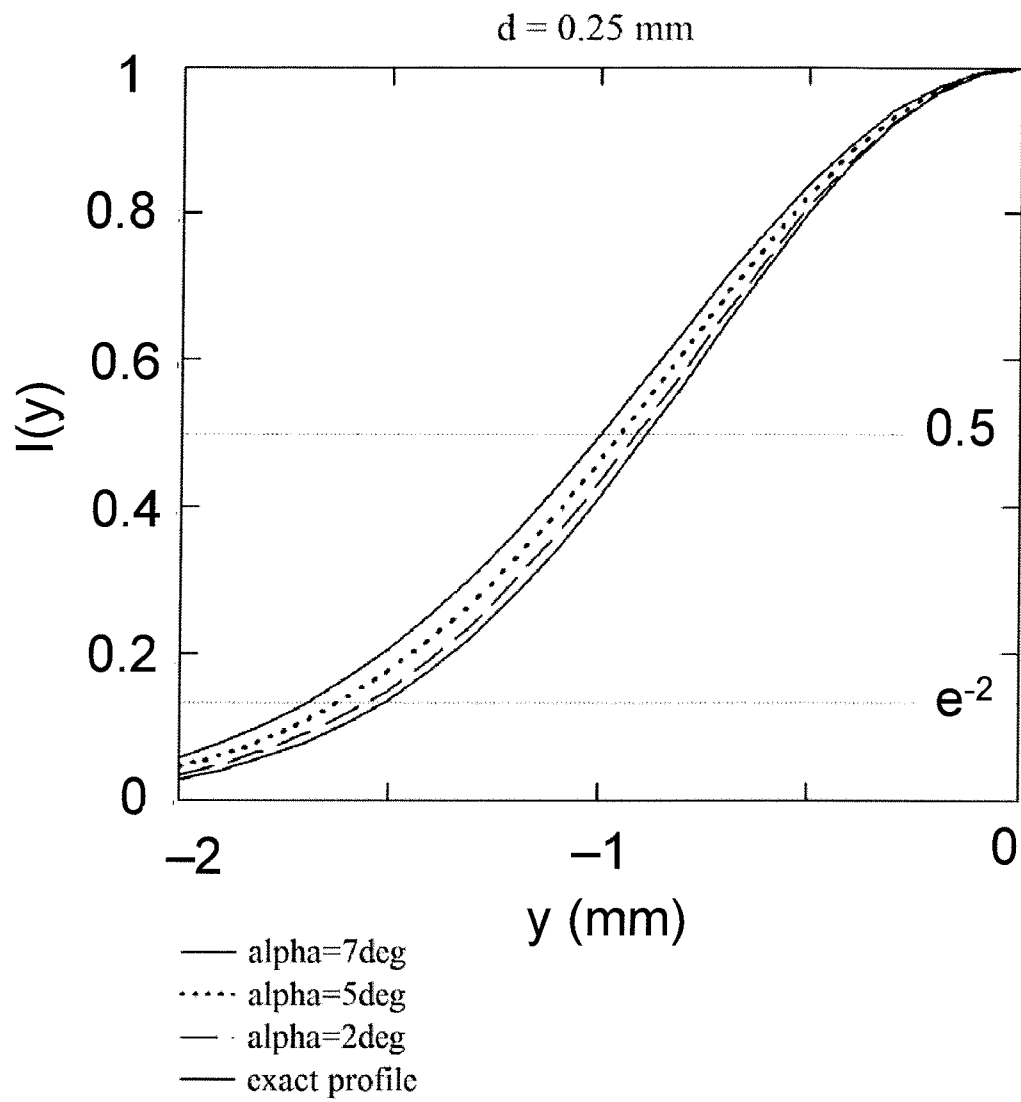**FIG. 9B**

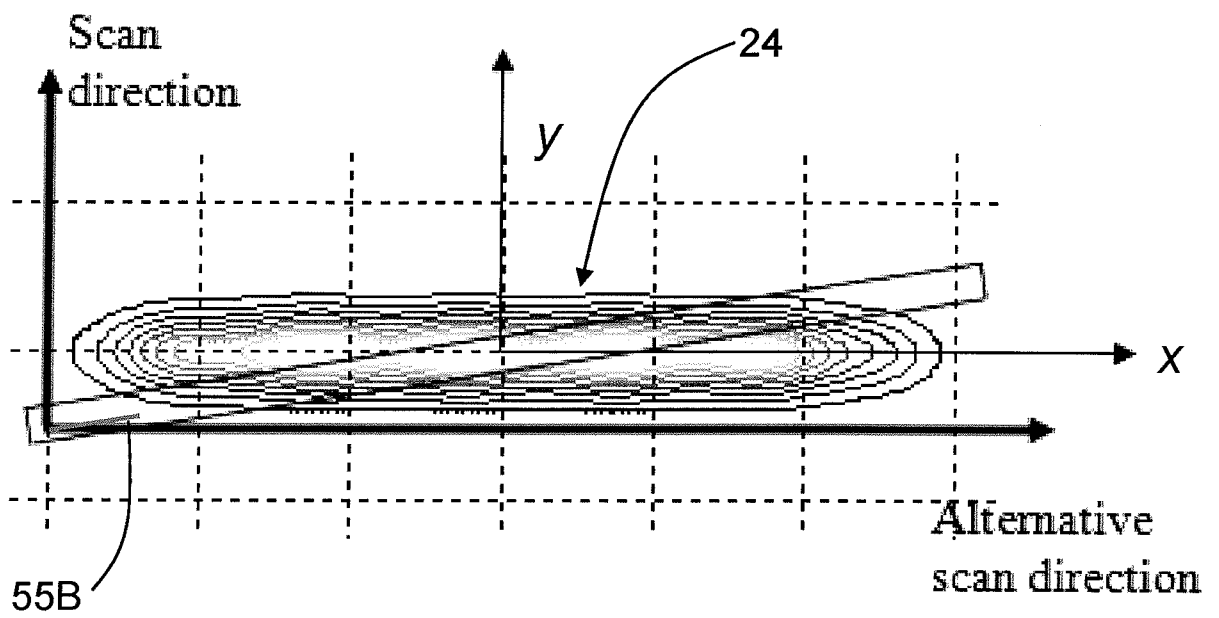**FIG. 10A**

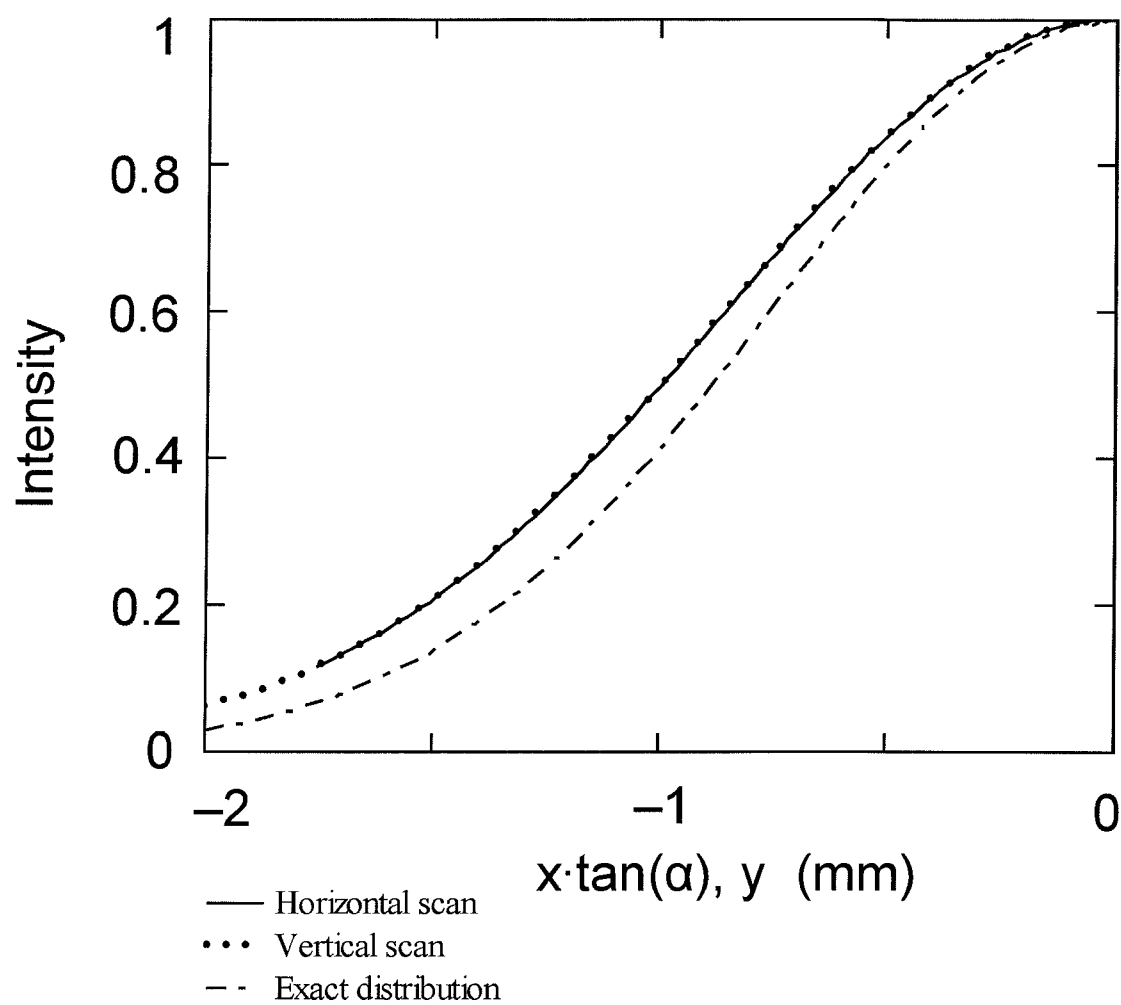**FIG. 10B**