

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/113779 A2

(51) International Patent Classification⁷: **F16L**

(21) International Application Number:
PCT/US2004/019391

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/600,373 20 June 2003 (20.06.2003) US

(71) Applicant and

(72) Inventor: **RICHARDS, Leslie, W.** [US/US]; 2735 N.
Britton Road, Union Grove, WI 53182 (US).

(74) Agents: **JANSSON, Peter, N.** et al.; Jansson, Shupe &
Munger, Ltd., 245 Main Street, Racine, WI 53403 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PLUG BAFFLE DEVICE FOR MOLD

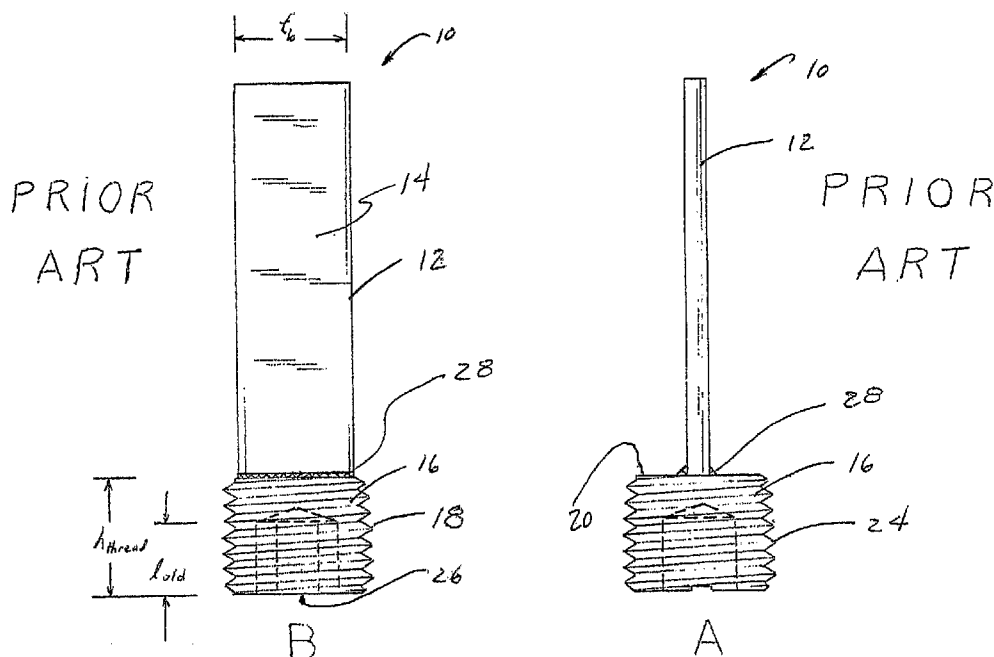

(57) Abstract: A plug baffle device (30 or 30a) for installation in a coolant passage (see coolant 82) within a mold (see mold parts 78 and 80), the plug baffle device having its coolant-encountering blade (32) mechanically attached to a base member (47), and methods for making such plug baffle device. Advantages include acceptance of greater torque and less susceptibility to damage from high torque. In certain highly preferred embodiments, the base member includes an extension portion facilitating mechanical engagement and providing other substantial advantages.

WO 2004/113779 A2