

This Sheet Has Been Replaced



1 -

REPLACED SHEETS SG

- | | | | | |
|---|---------|-----|----------|-----|
| ☒ Description | : paged | 1 | to paged | 21 |
| ☐ Claim(s) | : paged | 22 | to paged | --- |
| ☐ Drawing(s) | : paged | --- | to paged | --- |
| ☒ Abstract | : paged | 1 | to paged | --- |


WATERBORNE PHOTORESISTS HAVING POLYSILOXANES

The present invention is directed to photoresists, such as those used for forming printed circuit boards and more particularly to waterborne, liquid applied photoresists.

Photoimageable compositions useful as resists for forming printed circuits, printing plate, solder masks or the like have been used for some time now. The earliest photoresists were solvent-borne and solvent-developable. The development of aqueous-developable resists represented an advance in reducing solvent emissions in the immediate workplace and in the general environment. The continued emphasis in reducing organic solvent both from the workplace and from the general environment has spurred the search for waterborne photoresists which are formulated and applied as aqueous liquids.

U.S. patent No. 5,045,435, the teachings of which are incorporated herein by reference, describes a waterborne photoresist composition which is developable in alkaline aqueous solution. The composition comprises a multifunctional monomer, a photoinitiator and a latex of water-insoluble carboxylated acrylic copolymer. To stabilize the composition and to adjust the viscosity, this patent teaches neutralizing the latex polymer to at least 25% with a base, such as ammonia, another amine, or sodium hydroxide.

To most faithfully reproduce the pattern of artwork with high resolution, contact printing with the artwork (or phototool) laid in direct contact with the photoimageable composition layer is usually required. Contact printing is required to achieve resolution of small (less than 3 mil) circuit geometries. If contact printing is to be used,




however, the surface of the photoimageable composition layer must be sufficiently non-tacky so as not to adhere to the artwork. Transfer of even some photoimageable composition may either permanently damage the artwork or require extensive cleaning of the artwork.

It is a general object of the present invention to provide a waterborne photoimageable composition which when applied as a layer has a surface which is sufficiently non-tacky for artwork to be placed in direct contact therewith.





In accordance with the invention, a waterborne photoimageable composition comprises an aqueous composition containing A) between about 30 and about 80 wt% of a latex binder polymer having acid functionality, e.g., carboxylic acid functionality or sulfonic acid functionality, which provides an acid number of between about 50 and about 250, B) between about 15 and about 50 wt% of alpha,beta-ethylenically unsaturated monomer(s), C) between about 0.1 and about 25 wt% of a photoinitiator or photoinitiator chemical system which generates free radicals, D) between about 1 and about 40 wt% of a neutralizing base and/or polyether polyurethane associate thickener in amounts sufficient to stabilize the photoimageable composition as an aqueous emulsion and E), between about 0.1 and about 10.0 wt.% of a (poly)siloxane or mixture of (poly)siloxanes, the weight percentages being based on total weight of components A-E.




Latex binder polymers useful in the photoimageable composition of the present invention are typically prepared by emulsion polymerization of alpha, beta-unsaturated monomers, such as vinyl, acrylate or styrene monomers. Sufficient acid functional monomers are used to provide the acid number of between about 50 and about 250, preferably



at least about 100. A typical emulsion polymerization procedure and some examples of suitable emulsions are found in U.S. Patent No. 3,929,743, the teachings of which are incorporated herein by reference. Suitable emulsions can also be obtained commercially, e.g., Neocryl[®] CL-340 (40% solids) available from ICI Resins U.S. and Acrysol[®] I-2074 (46% solids) available from Rohm and Haas.


Suitable acid functional monomers for use in forming the acid functional binder polymer have the formulae:

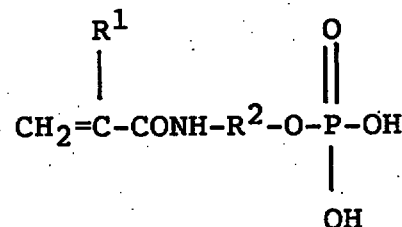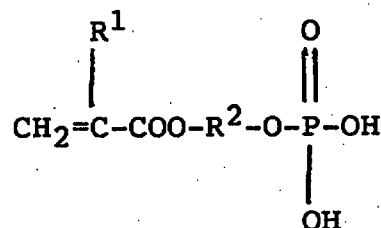

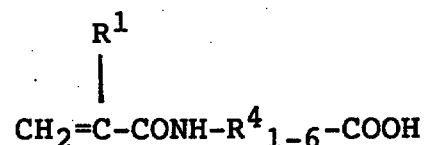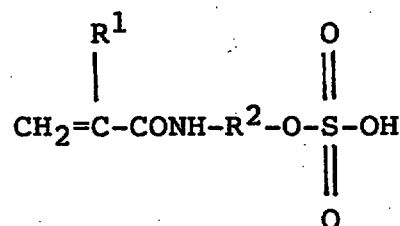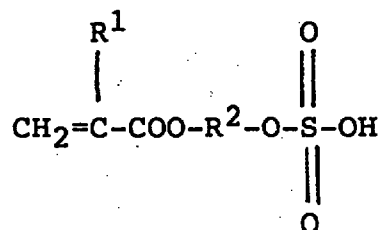

wherein R¹ represents a hydrogen atom or a methyl group, R² represents (CH₂)_n wherein n is an integer of 1 to 6, R³ represents an alkylene group having 1 to 6 carbon atoms or a phenylene group, and R⁴s are the same or different and are selected from CH₂ and CHOH.


Some specific examples of suitable acid functional monomers are acrylic acid, methacrylic acid, maleic acid, fumaric acid, citraconic acid, 2-acrylamido-2-methylpropanesulfonic acid, 2-propenoic acid-2-methyl-2-sulfoethyl ester, 2-hydroxyethyl acryloyl phosphate, 2-hydroxypropyl acryloyl phosphate, 2-hydroxy-alpha-acryloyl phosphate, etc. One or more of such acid functional monomers may be used to form the binder polymer. The acid functional monomers may be copolymerized with non-acid functional monomers, such as esters of acrylic acids, for example, methyl acrylate, methyl methacrylate, hydroxy ethyl acrylate, butyl methacrylate, octyl acrylate, 2-ethoxy ethyl methacrylate, t-butyl acrylate, 1,5-pentanediol diacrylate,



N,N-diethylaminoethyl acrylate, ethylene glycol diacrylate, 1,3-propanediol diacrylate, decamethylene glycol diacrylate, decamethylene glycol dimethacrylate, 1,4-cyclohexanediol diacrylate, 2,2-dimethylol propane diacrylate, glycerol diacrylate, tripropylene glycol diacrylate, glycerol triacrylate, 2,2-di(p-hydroxyphenyl)-propane dimethacrylate, triethylene glycol diacrylate, polyoxyethyl-2-2-di(p-hydroxyphenyl)-propane dimethacrylate, triethylene glycol dimethacrylate, polyoxypropyltrimethylol propane triacrylate, ethylene glycol dimethacrylate, butylene glycol dimethacrylate, 1,3-propanediol dimethacrylate, butylene glycol dimethacrylate, 1,3-propanediol dimethacrylate, 1,2,4-butanetriol trimethacrylate, 2,2,4-trimethyl-1,3-pentanediol dimethacrylate, pentaerythritol trimethacrylate, 1-phenyl ethylene-1,2-dimethacrylate, pentaerythritol tetramethacrylate, trimethylol propane trimethacrylate, 1,5-pentanediol dimethacrylate, and 1,4-benzenediol dimethacrylate; styrene and substituted styrene, such as 2-methyl styrene and vinyl toluene and vinyl esters, such as vinyl acrylate and vinyl methacrylate to provide the desired acid number.

To help ensure that the photoimageable composition is contact imageable, i.e., dries to a tack-free state, the glass transition temperature (T_g) of the latex binder polymer is preferably at least about 60°C as measured by Differential Scanning Calorimetry (DSC) @ 20°min. The polymers have a weight average molecular weight (M_w) of between about 500 and about 200,000 as measured by gel permeation chromatography (GPS) using a polystyrene standard.

To produce the image, this negative-acting photoimageable composition contains photopolymerizeable monomers, particularly alpha,beta-ethylenically unsaturated



monomers, including a substantial portion of multifunctional monomers. Useful monomers include those, listed above, used to form the binder polymers. Particularly suitable monomers include multifunctional acrylic monomers, such as tetraethylene glycol diacrylate (TEGDA), trimethylol propane triacrylate (TMPTA), butanediol dimethacrylate (BDDMA) and pentaerythritol triacrylate (PETA). The monomer fraction may include both water-soluble and water-insoluble monomers; however, the monomer fraction should contain a sufficiently high proportion of water-insoluble (having solubilities in water at 20°C below about 0.3 g/100ml) monomers, e.g., above about 20 mole percent, so that the monomer fraction, as a whole, is insoluble in water.

To initiate polymerization of the monomers upon exposure to actinic radiation, the photoimageable composition contains an appropriate photoinitiator(s) or photoinitiator chemical system. Suitable photoinitiators include benzoin ethers, benzil ketals, acetophenones, benzophenones and related compounds with amines. Preferred initiators are thioxanthenes, e.g., 2-isopropyl thioxanthenes, particularly in conjunction with an amine.

In accordance with the invention, the waterborne photoimageable compositions include a poly(siloxane) selected from the group consisting of cyclo poly(dimethylsiloxanes), polyether modified poly(dimethylsiloxanes), poly(dimethylsiloxanes) and mixtures thereof, cyclo poly(dimethylsiloxanes) and polyether modified poly(dimethylsiloxanes) being preferred. In a particularly preferred aspect of the invention, the poly(siloxane) fraction is a mixture of cyclodimethylsiloxanes and polyether modified dimethylsiloxanes at a weight ratio of between about 1:9 and about 9:1. An example of such a mixture is Dow Corning




- 7 -

Q4-3667 which is an 80:20 mixture of polyether modified poly(dimethylsiloxanes) and cyclo poly(dimethylsiloxanes). In addition to providing a tack-free surface, it is desirable that the material be water-soluble and not result in cratering or other coating defects. It is believed that after coating and during drying, the poly(siloxanes) tend to migrate to the surface to render the surface tack-free.


Poly(dimethylsiloxanes) useful in the invention have the general formula $(\text{CH}_3)_3\text{-}[\text{Si}(\text{Me})_2\text{-O}]_n\text{-Si}(\text{CH}_3)_3$ where n is 0-4,000.

Cyclo poly(dimethylsiloxanes) have the general formula $\text{-}[\text{Si}(\text{Me}_2)\text{-O}]_n\text{-}$ where n is 3 to 60.

Polyether Modified poly(dimethylsiloxanes) have the general formula:

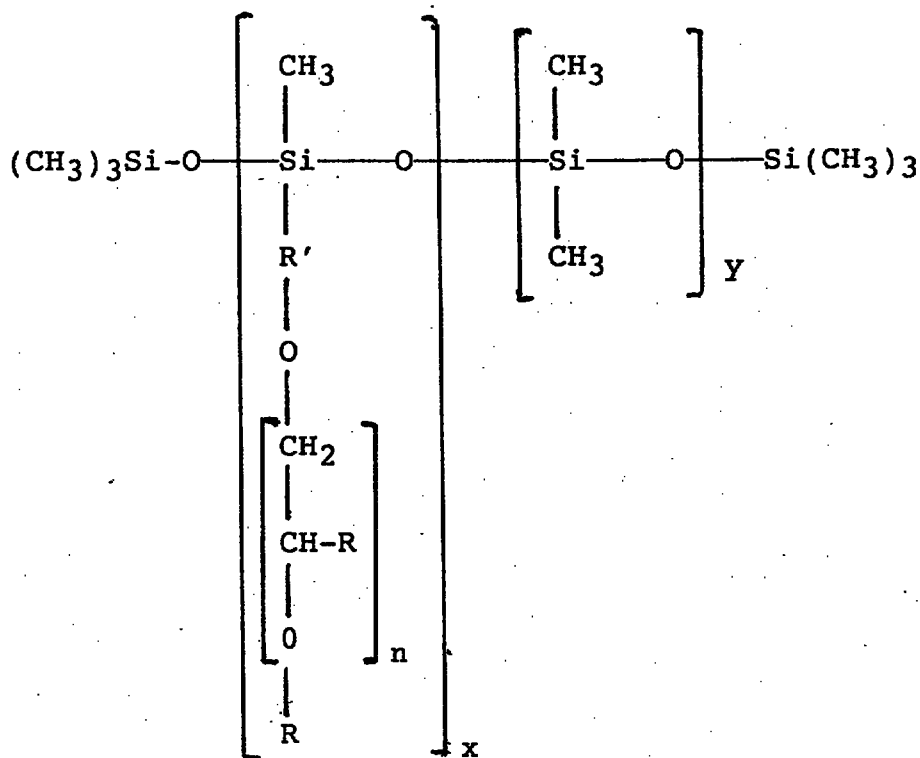

where $n = 0$ to 1500, $x = 1$ to 2,000, $y = 1$ to 2000, $\text{R} = \text{H}$ or CH_3 , $\text{R}' = (\text{CH}_2)_{0-5}$ and the groups subscripted x and y



are in random order.

Molecular weights of the poly(siloxanes) may vary over a very broad range. Low molecular poly(siloxanes) may have weight average molecular weights in the 100-600 Mw range; high molecular poly(siloxanes) may have weight average molecular weights in the 2,000 to 500,000 Mw range.

The waterborne photoimageable composition preferably includes a surfactant which is a fluoroaliphatic oxyethylene adduct at a level of between about 0.5 and about 3.0 wt% based upon the combined weights of components A)-E) above. Such surfactants have the general formula:

$\text{CF}_3-(\text{CF}_2)_n-\text{Y}-\text{X}_m-\text{Z}$; where $n = 0$ to 20 , $\text{Y} = \text{SO}_2-\text{N}(\text{C}_1-\text{C}_{10}\text{alkyl})$, $\text{X} = \text{CH}_2-\text{CH}_2-\text{O}$ or $\text{CH}(\text{CH}_3)\text{CH}_2-\text{O}$, $m = 0$ to 20 , and $\text{Z} = \text{CH}_2-\text{CH}_2-\text{OH}$ or $\text{CH}(\text{CH}_3)-\text{CH}_2-\text{OH}$.

Stabilization of the emulsion, including binder polymer is required. Emulsion stabilization and may be accomplished by at least partial neutralization with a base, as is taught in above- referenced U.S. Patent No. 5,045,435. Preferably, as is taught in U.S. Patent Application No. 08/199,037, of which this application is a continuation-in-part, stabilization of the emulsion and viscosity adjustment are achieved using a polyether polyurethane associate thickener. Polyether polyurethane thickeners are polymers having at least two hydrophobic segments which are the residues of hydrophobic isocyanates, generally isocyanates having isocyanate functionality of 2 or higher, and at least one hydrophilic polyether segment joining the hydrophobic segments by urethane linkages. The block polymers which act as associate thickener may take a variety of forms including ABA, $(\text{AB})_n$, star polymers and the like. The polyether segments are formed from poly(alkylene oxide) segments, formed from monomers such as



propylene oxide and ethylene oxide. To be sufficiently hydrophilic, generally it is necessary that at least about 3 mole percent of the poly(alkylene oxide) segment(s) be ethylene oxide residues. The hydrophobic portion of the isocyanate residue is typically an alkyl, cycloalkyl or aromatic moiety. Polyether polyurethane associate thickeners and their function are described, for example by A.J.M. Knoef, and H. Slingerland, "Urethane-Based Polymeric Thickeners for Aqueous Coating Systems" JOCCA, Sept. 1992, pp 335-338; J.H. Bieleman et al. Polymers Paint Colour Journal 1986, V.176(4169) pp. 450-460; and A.J. Whitton and R.E. Van Doren Polymers Paint Colour Journal 1991, V.181(4286) pp. 374-377. Particularly suitable polyether polyurethane associate thickeners and their synthesis are described in U.S. Patent No. 4,079,028 to Emmons et al., the teachings of which are incorporated herein by reference. Suitable polyether polyurethane associate thickeners are also described in U.S. Patents Nos. 4,426,485 to Hoy et al. and 4,743,698 to Ruffner et al., the teaching of each of which are incorporated herein by reference. Examples of suitable commercially available associate thickeners are DSX1514 (Henkel) and QR708 (Rohm and Haas).

By using the polyether polyurethane associate thickener, less neutralization of the binder polymer latex is required. In some cases no neutralization is required. In other cases, it is desirable to neutralize the binder up to about 20% of the equivalent acid functionality of the binder polymer. Typically base will be added to neutralize at least about 2% of the acid functionality of the binder polymer. Neutralization may be done with ammonia; primary, secondary, or tertiary amines; or hydroxides. Preferred neutralizing bases are hydroxy functional tertiary amines. The addition of associate thickener in place of at least some of the neutralizer allows for a smoother more uniform



coating. The improved coating quality minimizes potential circuit board defects caused by thin spots or pin holes in the coating. In addition, when applied by roller coating, the photoimageable composition with associate thickener produces a smoother coating at lower roller compression. Low roller compression results in extended life of the rubber rollers.

Reducing neutralizers improves chemical resistance of the applied and dried photoimageable composition layer. When ammonia or amine use is reduced, odor is reduced. Associate thickeners reduce viscosity drift of the aqueous photoimageable composition. Even under high shear, viscosity tends to remain stable.

In addition to components A-E listed above, minor amounts (generally less than about 10 wt% total based on the weight of A-E) of conventional additives may be used, including; antifoam agents, antioxidants, dyes, adhesion promoters, slip aids, and other surface tension modifiers.

In a preferred method of preparing the waterborne photoimageable composition of the present invention, those components, such as initiators, antioxidants and dyes, most compatible with a hydrophobic phase are admixed with the monomer fraction to produce a monomer base and those components most compatible with an aqueous phase with the latex polymer, such as antifoam, neutralizer surfactant and associate thickener, are admixed to form a polymer mix. The hydrophobic phase and polymer mix are blended to form an hydrophobic phase-in-water emulsion. Subsequently, high boiling solvents, surfactants, including slip aids, surface tension modifiers, and adhesion promoters are added.

The final water-borne composition is generally between about 20 and about 40 wt. percent solids. In the



waterborne composition, the binder comprises between about 10 and about 30 wt%, monomers from about 3 to 20 wt%, initiator from about 0.3 to about 10 wt%, neutralizing base and/or thickener from about 1.5 to about 20 wt%, and poly(siloxane(s)) at between about .02 and about 1 wt%. If used, a fluoraliphatic oxyethylene adduct surfactant will typically be present at between about .06 and about 2 wt%.

The composition may be coated by any of the coating systems known in the art for coating solvent-borne photoimageable compositions, such as roll coating, dip coating, spray coating or curtain coating.

The compositions of the present invention are applied in a conventional manner, either as liquid compositions directly to a metal clad blank laminate or to a polymeric support sheet to form a dry film. After coating, the composition is dried to remove water and also to remove volatiles, such as ammonia or amine, water, etc., thereby rendering the solution polymer insoluble in acidic or neutral aqueous medium. As the photoimageable composition dries, the system coalesces into a continuous film. Drying is preferably carried out at somewhat elevated temperatures, both to hasten removal of the water, and to drive off the ammonia or volatile amine. Preferably, drying is carried out at a temperature of about 90°C.


In forming a dry film, a water-borne composition is applied to flexible support sheet, e.g., polyethylene terephthalate, and then dried to remove water and volatiles. Subsequently, a protective sheet, e.g., polyethylene, is applied to the photoimageable composition layer, and the dry film is rolled into reels. In drying the photoimageable composition layer, it is found desirable in some cases to leave a residual water content of between about 1 and about 2 wt. % (relative to solids of the



photoimageable composition layer). This residual water acts to allow the photoimageable composition layer to conform to surface defects of a substrate, e.g., a copper-clad board, when laminated thereto.

Processing is in a conventional manner. In a typical procedure, a photoimageable composition layer, either formed from a liquid composition or transferred as a layer from a dry film, is applied to a copper surface of a copper-clad board. The photoimageable composition layer is exposed to actinic radiation through appropriate artwork. Exposure to actinic radiation polymerizes the monomer in the light-exposed areas, resulting in a cross-linked structure that is resistant to developer. Next, the composition is developed in dilute alkaline aqueous solution, such as a 1% sodium carbonate solution. The alkali solution causes salt formation with the carboxylic groups of the binder polymers, rendering them soluble and removable. After development, an etchant may be used to remove copper from those areas where the resist was removed, thereby forming a printed circuit. The remaining resist is then removed using an appropriate stripper.

Not only can waterborne primary imaging photoresists be provided in accordance with the invention, but solder mask-forming compositions can be provided as well. By solder mask is meant herein a hard, permanent layer which meets at least the minimal requirements of the abrasion resistance tests as defined in IPC-SM-840B, Table 12, Summary of Criteria for Qualification/Conformance (Institute for Interconnecting Circuits). To become hard and permanent, it is generally necessary that the photoimageable composition be curable after exposure, development and processing of the board, e.g., by thermal and/or UV curing. One way to provide a post-cure is to provide binder polymer having free -OH groups in the



backbone that may be cured, for example, by cross-linking with aminoplast resins, such as melamine/formaldehyde resins and urea/formaldehyde resins. Alternatively, the photoimageable composition may contain a compatible epoxy resin and a curative for the epoxy resin. It is found that water-borne photoimageable compositions in accordance with the invention exhibit excellent shelf lives after application to copper substrates and can remain on a copper-clad board upwards of several days.

The invention will now be described in greater detail by way of specific examples.

Examples 1-4

Water-borne photoimageable compositions were formulated according to Table 1 below. Amounts are in grams. 2.3 grams of neutralizer represents about 15 % neutralization; 4.5 grams of neutralizer represents about 30% neutralization. Performance data is according to Table 2 below. "Monomer base" in Table 1 is per Table 3; all materials being mixed together, filtered and subsequently added to the aqueous portion.




TABLE # 1

FORMULATION NAME	INGREDIENT TYPE			
	#1	#2	#3	#4
Neocryl CL-340 (40% solids)	100.0	100.0	100.0	100.0
DMAMP-80 (Angus)	0.0	0.0	2.3	0.0
AMP-95 (Angus)	0.0	0.0	0.0	2.3
DSX-1514 (Henkel)	4.5	9.0	2.3	2.3
Deionized Water	100.0	100.0	100.0	100.0
BYK-033 (BYK/Chemie)	1.0	1.0	1.0	1.0
Monomer Base	20.5	20.5	20.5	20.5
Q4-3667 (Dow Corning)	0.45	0.45	0.45	0.45
Fluorad FC170-C (3M)	1.0	1.0	1.0	1.0
Texanol (Eastman)	4.5	4.5	4.5	4.5

Neocryl CL-340 is a styrene/acrylic polymer having an acid number of about 160.

Q4-3667 (Dow) is an 80:20 mixture of polyether modified dimethylsiloxanes and cyclodimethylsiloxanes.



TABLE # 2

FORMULATION NAME	#1	#2	#3	#4
DMAMP-80	0.0	0.0	2.3	0.0
AMP-95 (Angus)	0.0	0.0	0.0	2.3
DSX-1514 (Henkel)	4.5	9.0	2.3	2.3
PERFORMANCE RESULTS				
Viscosity (initial)	3500 cps	5000 cps	2900 cps	3200 cps
Viscosity (1 week holding)	3500 cps	5000 cps	2700 cps	2700 cps
Odor	none	none	slight fishy	slight ammonia
Emulsion Stability	good	very good	fair to good	good
Substrate Staining	no stain	no stain	slight stain	slight stain
Alkaline Resistance	good	good	fair to good	fair to good
Coating Defects	0 voids/ft ²	0 voids/ft ²	2 voids/ft ²	2 void/ft ²
Coating Uniformity	slight ribbing	no ribbing	moderate ribbing	slight ribbing
Developing Time	29 sec.	29 sec.	27 sec.	28 sec.
Photospeed (at 100 mj/cm ²)	Copper 8	Copper 8	Copper 7	Copper 7
Circuit Pattern Defects	1 defect/ft ²	0 defects/ft ²	3 defects/ft ²	4 defects/ft ²
DMAMP = 2-dimethylamino-2-methyl-1-propanol; AMP = 2-amino-2-methyl-1-propanol.				




TABLE #3

MONOMER BASE <u>COMPONENTS</u>	COMPONENT <u>TYPE</u>	GRAMS PER <u>FORMULA</u>
Ethoxylated TMPTA (3 moles ethoxylation)	multi functional acrylate	17.6
Modaflow	flow additive	0.05
Antioxidant 2246	antioxidant	0.03
Quantacure ITX (thioxanthone)	photosensitizer	0.59
Quantacure EPD (3° amine)	photoinitiator	1.49
Baso Blue 688	background dye	0.09
Triphenylphosphine	antioxidant	0.5
Benzotriazole	adhesion promoter	0.25

TMPTA = trimethylol propane triacrylate



- 17 -

PROCESSING CONDITIONS

Coating - Burkle (single sided) Roller Coater, 22 threads per inch
Substrate - Copper Clad
Exposure - HMW ORC, model 301 B, diazo artwork
Development - 1% sodium carbonate monohydrate, 85° F, 2x breakpoint
Etching - 3 normal cupric chloride, 140° F, 1.3 x minimum etch
Stripping - 3% sodium hydroxide, 130° F

PERFORMANCE EXPLANATION

Viscosity - measured on a Brookfield viscometer initially and after one week at 70° F
Odor - the odor was observed after coating and before drying
Emulsion Stability - Stability was rated based on the overall uniformity of the lacquer mixture
Alkaline Resistance - the resistance was measured after alkaline etch at pH 9.2
Coating Defects - the number of coating voids (thin spots) were counted after roller coating
Coating Uniformity - the uniformity was observed immediately after coating
Developing Time - twice the amount of time required to remove the unexposed resist
Photospeed - using a Stouffer 21 step to measure the last remaining step (each step varies by $\sqrt{2}$)
(Note: a higher step would indicate a higher degree of polymerization)
Circuit Pattern Defects - the total number of circuit shorts and opens were measured
(Note: the artwork pattern contained 4 mil lines and 4 mil spaces)

Examples 5-33

Various poly(siloxanes) were tested in the base formula below using the processing conditions of Examples 1-4.

Neocryl CL-340 (40% solids)	100.0
DMAMP-80 (Angus)	1.0
DSX-1514 (Henkel)	7.0
Deionized Water	100.0
BYK-033 (BYK/Chemie)	1.0
Monomer Base (see Table #3)	20.5
Fluorad FC170-C (3M)	1.0
Texanol (Eastman)	4.5

Results are as per Table 4 below



TABLE 4

Formulation Name	Molecular Weight	#5	#6	#7	#8	#9	#10
Cyclodimethylsiloxane	< 1,000	0.45	0	0	0	0	0
	> 1,000	0	0.45	0	0	0	0
Polyether modified dimethylsiloxane	< 1,000	0	0	0.45	0	0	0
	> 1,000	0	0	0	0.45	0	0
Dimethylsiloxane	< 1,000	0	0	0	0	0.45	0
	> 1,000	0	0	0	0	0	0.45
PERFORMANCE RESULTS							
Solubility in Water		soluble	partially soluble	soluble	soluble	partially soluble	not soluble
Tack to the Artwork		moderate	slight to moderate	slight	slight	moderate	moderate
Coating Defects		none	slight cratering	none	none	slight cratering	slight cratering

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#11	#12	#13	#14	#15	#16
Cyclodimethylsiloxane	< 1,000	0.22	0.22	0.22	0.22	0.22	0
	> 1,000	0	0	0	0	0	0
Polyether modified dimethylsiloxane	< 1,000	0.22	0	0	0	0	0
	> 1,000	0	0.22	0	0	0	0
Dimethylsiloxane	< 1,000	0	0	0.22	0	0	0
	> 1,000	0	0	0	0.22	0	0
PERFORMANCE RESULTS							
Solubility in Water		soluble	soluble	soluble	soluble	soluble	n.a
Tack to the Artwork		slight	none	slight to moderate	slight to moderate	moderate to severe	severe
Coating Defects		none	none	very slight cratering	slight cratering	none	none




- 20 -

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#17	#18	#19	#20	#21	#22
Cyclodimethylsiloxane	< 1,000	0	0	0	0	0	0
	> 1,000	0.22	0.22	0.22	0.22	0.22	0
Polyether modified dimethylsiloxane	< 1,000	0.22	0	0	0	0	0
	> 1,000	0	0.22	0	0	0	0
Dimethylsiloxane	< 1,000	0	0	0.22	0	0	0
	> 1,000	0	0	0	0.22	0	0
PERFORMANCE RESULTS							
Solubility in Water		soluble	partially soluble	partially soluble	partially soluble	soluble	n.a
Tack to the Artwork		very slight	none	slight	slight	moderate to severe	severe
Coating Defects		slight cratering	slight to moderate cratering	slight to moderate cratering	moderate cratering	slight cratering	none

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#23	#24	#25	#26	#27	#28
Cyclodimethylsiloxane	< 1,000	0.22	0	0	0	0	0
	> 1,000	0.22	0	0	0	0	0
Polyether modified dimethylsiloxane	< 1,000	0	0.22	0	0.22	0.22	0
	> 1,000	0	0.22	0	0	0	0
Dimethylsiloxane	< 1,000	0	0	0.22	0.22	0	0
	> 1,000	0	0	0.22	0	0.22	0
PERFORMANCE RESULTS							
Solubility in Water		soluble	soluble	partially soluble	soluble	partially soluble	n.a
Tack to the Artwork		very slight	very slight	slight	slight	slight	severe
Coating Defects		none	none	slight to moderate cratering	slight to moderate cratering	slight cratering	none



- 21 -

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#29	#30	#31	#32	#33
Cyclodimethylsiloxane	< 1,000	0.22	0.11	0.33	0	0
	> 1,000	0.22	0.33	0.11	0.22	0
PERFORMANCE RESULTS						
Solubility in Water		soluble	soluble	soluble	soluble	soluble
Tack to the Artwork		none	none	very slight	very slight	none
Coating Defects		none	none	none	none	slight cratering

This Sheet Has Been Replaced



ABSTRACT

WATERBORNE PHOTORESISTS HAVING POLYSILOXANES

A waterborne photoimageable composition or photoresist comprises a latex binder polymer having sufficient carboxylic acid functionality to render it developable in alkaline aqueous solution, a photopolymerizeable monomer fraction, a photoinitiator chemical system and a poly(siloxane(s)).

REPLACED SHEETS		SG
☐	Description : paged to paged	
☒	Claim(s) : paged 22 to paged	
☐	Drawing(s) : paged to paged	1 -
☐	Abstract : paged to paged	

REPLACEMENT SHEETS		SG
☒	Description : paged 22 to paged 22	
☒	Claim(s) : paged 22 to paged	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged 22 to paged	
DATE OF RECEIPT - 5 JUL 1996		

WATERBORNE PHOTORESISTS HAVING POLYSILOXANES

The present invention is directed to photoresists, such as those used for forming printed circuit boards and more particularly to waterborne, liquid applied photoresists.

Photoimageable compositions useful as resists for forming printed circuits, printing plate, solder masks or the like have been used for some time now. The earliest photoresists were solvent-borne and solvent-developable. The development of aqueous-developable resists represented an advance in reducing solvent emissions in the immediate workplace and in the general environment. The continued emphasis in reducing organic solvent both from the workplace and from the general environment has spurred the search for waterborne photoresists which are formulated and applied as aqueous liquids.

U.S. patent No. 5,045,435, the teachings of which are incorporated herein by reference, describes a waterborne photoresist composition which is developable in alkaline aqueous solution. The composition comprises a multifunctional monomer, a photoinitiator and a latex of water-insoluble carboxylated acrylic copolymer. To stabilize the composition and to adjust the viscosity, this patent teaches neutralizing the latex polymer to at least 25% with a base, such as ammonia, another amine, or sodium hydroxide.

To most faithfully reproduce the pattern of artwork with high resolution, contact printing with the artwork (or phototool) laid in direct contact with the photoimageable composition layer is usually required. Contact printing is required to achieve resolution of small (less than 3 mil) circuit geometries. If contact printing is to be used,

This is the replacement sheet

Date: 05 JUL 1996

however, the surface of the photoimageable composition layer must be sufficiently non-tacky so as not to adhere to the artwork. Transfer of even some photoimageable composition may either permanently damage the artwork or require extensive cleaning of the artwork.

It is a general object of the present invention to provide a waterborne photoimageable composition which when applied as a layer has a surface which is sufficiently non-tacky for artwork to be placed in direct contact therewith.

In accordance with the invention, a waterborne photoimageable composition comprises an aqueous composition containing A) between about 30 and about 80 wt% of a latex binder polymer having acid functionality, e.g., carboxylic acid functionality or sulfonic acid functionality, which provides an acid number of between about 50 and about 250, B) between about 15 and about 50 wt% of alpha,beta-ethylenically unsaturated monomer(s), C) between about 0.1 and about 25 wt% of a photoinitiator or photoinitiator chemical system which generates free radicals, D) between about 1 and about 40 wt% of a neutralizing base and/or polyether polyurethane associate thickener in amounts sufficient to stabilize the photoimageable composition as an aqueous emulsion and E), between about 0.1 and about 10.0 wt.% of a (poly)siloxane or mixture of (poly)siloxanes, the weight percentages being based on total weight of components A-E.





Latex binder polymers useful in the photoimageable composition of the present invention are typically prepared by emulsion polymerization of alpha, beta-unsaturated monomers, such as vinyl, acrylate or styrene monomers. Sufficient acid functional monomers are used to provide the acid number of between about 50 and about 250, preferably

This is the replacement sheet

Date: 05 JUL 1996




at least about 100. A typical emulsion polymerization procedure and some examples of suitable emulsions are found in U.S. Patent No. 3,929,743, the teachings of which are incorporated herein by reference. Suitable emulsions can also be obtained commercially, e.g., Neocryl[®] CL-340 (40% solids) available from ICI Resins U.S. and Acrysol[®] I-2074 (46% solids) available from Rohm and Haas.

Suitable acid functional monomers for use in forming the acid functional binder polymer have the formulae:

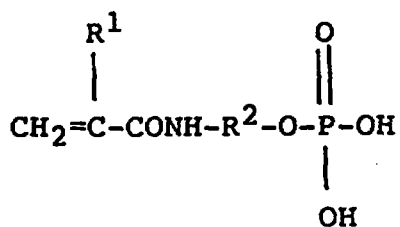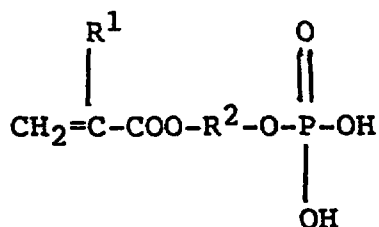

This is the replacement sheet

Date: 05 JUL 1996

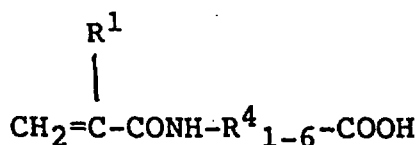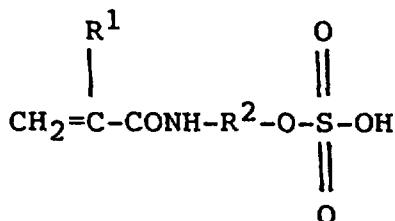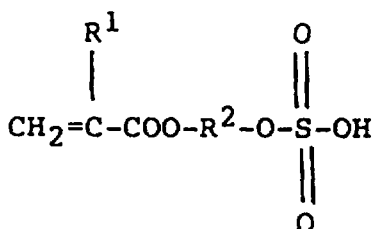

wherein R¹ represents a hydrogen atom or a methyl group, R² represents (CH₂)_n wherein n is an integer of 1 to 6, R³ represents an alkylene group having 1 to 6 carbon atoms or a phenylene group, and R⁴s are the same or different and are selected from CH₂ and CHOH.

Some specific examples of suitable acid functional monomers are acrylic acid, methacrylic acid, maleic acid, fumaric acid, citraconic acid, 2-acrylamido-2-methylpropanesulfonic acid, 2-propenoic acid-2-methyl-2-sulfoethyl ester, 2-hydroxyethyl acryloyl phosphate, 2-hydroxypropyl acryloyl phosphate, 2-hydroxy-alpha-acryloyl phosphate, etc. One or more of such acid functional monomers may be used to form the binder polymer. The acid functional monomers may be copolymerized with non-acid functional monomers, such as esters of acrylic acids, for example, methyl acrylate, methyl methacrylate, hydroxy ethyl acrylate, butyl methacrylate, octyl acrylate, 2-ethoxy ethyl methacrylate, t-butyl acrylate, 1,5-pentanediol diacrylate,

This is the replacement sheet

Date: 05 JUL 1996

N,N-diethylaminoethyl acrylate, ethylene glycol diacrylate, 1,3-propanediol diacrylate, decamethylene glycol diacrylate, decamethylene glycol dimethacrylate, 1,4-cyclohexanediol diacrylate, 2,2-dimethylol propane diacrylate, glycerol diacrylate, tripropylene glycol diacrylate, glycerol triacrylate, 2,2-di(p-hydroxyphenyl)-propane dimethacrylate, triethylene glycol diacrylate, polyoxyethyl-2-2-di(p-hydroxyphenyl)-propane dimethacrylate, triethylene glycol dimethacrylate, polyoxypropyltrimethylol propane triacrylate, ethylene glycol dimethacrylate, butylene glycol dimethacrylate, 1,3-propanediol dimethacrylate, butylene glycol dimethacrylate, 1,3-propanediol dimethacrylate, 1,2,4-butanetriol trimethacrylate, 2,2,4-trimethyl-1,3-pentanediol dimethacrylate, pentaerythritol trimethacrylate, 1-phenyl ethylene-1,2-dimethacrylate, pentaerythritol tetramethacrylate, trimethylol propane trimethacrylate, 1,5-pentanediol dimethacrylate, and 1,4-benzenediol dimethacrylate; styrene and substituted styrene, such as 2-methyl styrene and vinyl toluene and vinyl esters, such as vinyl acrylate and vinyl methacrylate to provide the desired acid number.

To help ensure that the photoimageable composition is contact imageable, i.e., dries to a tack-free state, the glass transition temperature (T_g) of the latex binder polymer is preferably at least about 60°C as measured by Differential Scanning Calorimetry (DSC) @ 20°min. The polymers have a weight average molecular weight (M_w) of between about 500 and about 200,000 as measured by gel permeation chromatography (GPS) using a polystyrene standard.

To produce the image, this negative-acting photoimageable composition contains photopolymerizable monomers, particularly alpha,beta-ethylenically unsaturated

This is the replacement sheet

Date: 05 JUL 1995

monomers, including a substantial portion of multifunctional monomers. Useful monomers include those, listed above, used to form the binder polymers. Particularly suitable monomers include multifunctional acrylic monomers, such as tetraethylene glycol diacrylate (TEGDA), trimethylol propane triacrylate (TMPTA), butanediol dimethacrylate (BDDMA) and pentaerythritol triacrylate (PETA). The monomer fraction may include both water-soluble and water-insoluble monomers; however, the monomer fraction should contain a sufficiently high proportion of water-insoluble (having solubilities in water at 20°C below about 0.3 g/100ml) monomers; e.g., above about 20 mole percent, so that the monomer fraction, as a whole, is insoluble in water.

To initiate polymerization of the monomers upon exposure to actinic radiation, the photoimageable composition contains an appropriate photoinitiator(s) or photoinitiator chemical system. Suitable photoinitiators include benzoin ethers, benzil ketals, acetophenones, benzophenones and related compounds with amines. Preferred initiators are thioxanthenes, e.g., 2-isopropyl thioxanthenes, particularly in conjunction with an amine.

In accordance with the invention, the waterborne photoimageable compositions include a poly(siloxane) selected from the group consisting of cyclo poly(dimethylsiloxanes), polyether modified poly(dimethylsiloxanes), poly(dimethylsiloxanes) and mixtures thereof, cyclo poly(dimethylsiloxanes) and polyether modified poly(dimethylsiloxanes) being preferred. In a particularly preferred aspect of the invention, the poly(siloxane) fraction is a mixture of cyclodimethylsiloxanes and polyether modified dimethylsiloxanes at a weight ratio of between about 1:9 and about 9:1. An example of such a mixture is Dow Corning


This is the replacement sheet

Date: 05 JUL 1996

Poly(dimethylsiloxanes) useful in the invention have the general formula $(\text{CH}_3)_3\text{-[Si(Me)}_2\text{-O)]}_n\text{-Si(CH}_3)_3$ where n is 0-4,000.

Cyclo poly(dimethylsiloxanes) have the general formula $-\text{[Si(Me}_2\text{)-O]}_n-$ where n is 3 to 60.

Polyether Modified poly(dimethylsiloxanes) have the general formula:

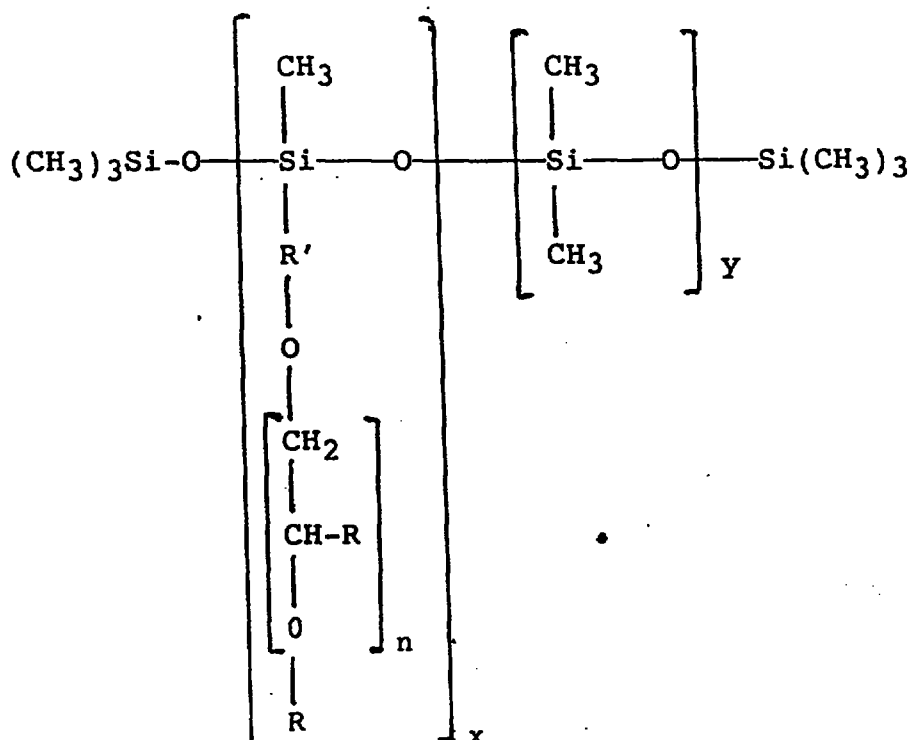

where $n = 0$ to 1500, $x = 1$ to 2,000, $y = 1$ to 2000, $R = H$ or CH_3 , $R' = (CH_2)_{0-5}$ and the groups subscripted x and y

This is the replacement sheet

Date:

05 JUL 1955

are in random order.

Molecular weights of the poly(siloxanes) may vary over a very broad range. Low molecular poly(siloxanes) may have weight average molecular weights in the 100-600 Mw range; high molecular poly(siloxanes) may have weight average molecular weights in the 2,000 to 500,000 Mw range.

The waterborne photoimageable composition preferably includes a surfactant which is a fluoroaliphatic oxyethylene adduct at a level of between about 0.5 and about 3.0 wt% based upon the combined weights of components A)-E) above. Such surfactants have the general formula:

$\text{CF}_3-(\text{CF}_2)_n-\text{Y}-\text{X}_m-\text{Z}$; where $n = 0$ to 20 , $\text{Y} = \text{SO}_2-\text{N}(\text{C}_1-\text{C}_{10}\text{alkyl})$, $\text{X} = \text{CH}_2-\text{CH}_2-\text{O}$ or $\text{CH}(\text{CH}_3)\text{CH}_2-\text{O}$, $m = 0$ to 20 , and $\text{Z} = \text{CH}_2-\text{CH}_2-\text{OH}$ or $\text{CH}(\text{CH}_3)-\text{CH}_2-\text{OH}$.

Stabilization of the emulsion, including binder polymer is required. Emulsion stabilization and may be accomplished by at least partial neutralization with a base, as is taught in above- referenced U.S. Patent No. 5,045,435. Preferably, as is taught in U.S. Patent Application No. 08/199,037, of which this application is a continuation-in-part, stabilization of the emulsion and viscosity adjustment are achieved using a polyether polyurethane associate thickener. Polyether polyurethane thickeners are polymers having at least two hydrophobic segments which are the residues of hydrophobic isocyanates, generally isocyanates having isocyanate functionality of 2 or higher, and at least one hydrophilic polyether segment joining the hydrophobic segments by urethane linkages. The block polymers which act as associate thickener may take a variety of forms including ABA, $(\text{AB})_n$, star polymers and the like. The polyether segments are formed from poly(alkylene oxide) segments, formed from monomers such as

This is the replacement sheet

Date: 05 JUL 1996

propylene oxide and ethylene oxide. To be sufficiently hydrophilic, generally it is necessary that at least about 3 mole percent of the poly(alkylene oxide) segment(s) be ethylene oxide residues. The hydrophobic portion of the isocyanate residue is typically an alkyl, cycloalkyl or aromatic moiety. Polyether polyurethane associate thickeners and their function are described, for example by A.J.M. Knoef, and H. Slingerland, "Urethane-Based Polymeric Thickeners for Aqueous Coating Systems" JOCCA, Sept. 1992, pp 335-338; J.H. Bieleman et al. Polymers Paint Colour Journal 1986, V.176(4169) pp. 450-460; and A.J. Whitton and R.E. Van Doren Polymers Paint Colour Journal 1991, V.181(4286) pp. 374-377. Particularly suitable polyether polyurethane associate thickeners and their synthesis are described in U.S. Patent No. 4,079,028 to Emmons et al., the teachings of which are incorporated herein by reference. Suitable polyether polyurethane associate thickeners are also described in U.S. Patents Nos. 4,426,485 to Hoy et al. and 4,743,698 to Ruffner et al., the teaching of each of which are incorporated herein by reference. Examples of suitable commercially available associate thickeners are DSX1514 (Henkel) and QR708 (Rohm and Haas).

By using the polyether polyurethane associate thickener, less neutralization of the binder polymer latex is required. In some cases no neutralization is required. In other cases, it is desirable to neutralize the binder up to about 20% of the equivalent acid functionality of the binder polymer. Typically base will be added to neutralize at least about 2% of the acid functionality of the binder polymer. Neutralization may be done with ammonia; primary, secondary, or tertiary amines; or hydroxides. Preferred neutralizing bases are hydroxy functional tertiary amines. The addition of associate thickener in place of at least some of the neutralizer allows for a smoother more uniform

This is the replacement sheet

Date: 05 JUL 1996

coating. The improved coating quality minimizes potential circuit board defects caused by thin spots or pin holes in the coating. In addition, when applied by roller coating, the photoimageable composition with associate thickener produces a smoother coating at lower roller compression. Low roller compression results in extended life of the rubber rollers.

Reducing neutralizers improves chemical resistance of the applied and dried photoimageable composition layer. When ammonia or amine use is reduced, odor is reduced. Associate thickeners reduce viscosity drift of the aqueous photoimageable composition. Even under high shear, viscosity tends to remain stable.

In addition to components A-E listed above, minor amounts (generally less than about 10 wt% total based on the weight of A-E) of conventional additives may be used, including; antifoam agents, antioxidants, dyes, adhesion promoters, slip aids, and other surface tension modifiers.

In a preferred method of preparing the waterborne photoimageable composition of the present invention, those components, such as initiators, antioxidants and dyes, most compatible with a hydrophobic phase are admixed with the monomer fraction to produce a monomer base and those components most compatible with an aqueous phase with the latex polymer, such as antifoam, neutralizer surfactant and associate thickener, are admixed to form a polymer mix. The hydrophobic phase and polymer mix are blended to form an hydrophobic phase-in-water emulsion. Subsequently, high boiling solvents, surfactants, including slip aids, surface tension modifiers, and adhesion promoters are added.

The final water-borne composition is generally between about 20 and about 40 wt. percent solids. In the

This is the replacement sheet

Date: 05 JUL 1996

waterborne composition, the binder comprises between about 10 and about 30 wt%, monomers from about 3 to 20 wt%, initiator from about 0.3 to about 10 wt%, neutralizing base and/or thickener from about 1.5 to about 20 wt%, and poly(siloxane(s)) at between about .02 and about 1 wt%. If used, a fluorolipathic oxyethylene adduct surfactant will typically be present at between about .06 and about 2 wt%.

The composition may be coated by any of the coating systems known in the art for coating solvent-borne photoimageable compositions, such as roll coating, dip coating, spray coating or curtain coating.

The compositions of the present invention are applied in a conventional manner, either as liquid compositions directly to a metal clad blank laminate or to a polymeric support sheet to form a dry film. After coating, the composition is dried to remove water and also to remove volatiles, such as ammonia or amine, water, etc., thereby rendering the solution polymer insoluble in acidic or neutral aqueous medium. As the photoimageable composition dries, the system coalesces into a continuous film. Drying is preferably carried out at somewhat elevated temperatures, both to hasten removal of the water, and to drive off the ammonia or volatile amine. Preferably, drying is carried out at a temperature of about 90°C.

In forming a dry film, a water-borne composition is applied to flexible support sheet, e.g., polyethylene terephthalate, and then dried to remove water and volatiles. Subsequently, a protective sheet, e.g., polyethylene, is applied to the photoimageable composition layer, and the dry film is rolled into reels. In drying the photoimageable composition layer, it is found desirable in some cases to leave a residual water content of between about 1 and about 2 wt. % (relative to solids of the

This is the replacement sheet

Date: 05 JUL 1996

photoimageable composition layer). This residual water acts to allow the photoimageable composition layer to conform to surface defects of a substrate, e.g., a copper-clad board, when laminated thereto.

Processing is in a conventional manner. In a typical procedure, a photoimageable composition layer, either formed from a liquid composition or transferred as a layer from a dry film, is applied to a copper surface of a copper-clad board. The photoimageable composition layer is exposed to actinic radiation through appropriate artwork. Exposure to actinic radiation polymerizes the monomer in the light-exposed areas, resulting in a cross-linked structure that is resistant to developer. Next, the composition is developed in dilute alkaline aqueous solution, such as a 1% sodium carbonate solution. The alkali solution causes salt formation with the carboxylic groups of the binder polymers, rendering them soluble and removable. After development, an etchant may be used to remove copper from those areas where the resist was removed, thereby forming a printed circuit. The remaining resist is then removed using an appropriate stripper.

Not only can waterborne primary imaging photoresists be provided in accordance with the invention, but solder mask-forming compositions can be provided as well. By solder mask is meant herein a hard, permanent layer which meets at least the minimal requirements of the abrasion resistance tests as defined in IPC-SM-840B, Table 12, Summary of Criteria for Qualification/Conformance (Institute for Interconnecting Circuits). To become hard and permanent, it is generally necessary that the photoimageable composition be curable after exposure, development and processing of the board, e.g., by thermal and/or UV curing. One way to provide a post-cure is to provide binder polymer having free -OH groups in the

This is the replacement sheet

Date: 05 JUL 1996

backbone that may be cured, for example, by cross-linking with aminoplast resins, such as melamine/formaldehyde resins and urea/formaldehyde resins. Alternatively, the photoimageable composition may contain a compatible epoxy resin and a curative for the epoxy resin. It is found that water-borne photoimageable compositions in accordance with the invention exhibit excellent shelf lives after application to copper substrates and can remain on a copper-clad board upwards of several days.

The invention will now be described in greater detail by way of specific examples.

Examples 1-4

Water-borne photoimageable compositions were formulated according to Table 1 below. Amounts are in grams. 2.3 grams of neutralizer represents about 15 % neutralization; 4.5 grams of neutralizer represents about 30% neutralization. Performance data is according to Table 2 below. "Monomer base" in Table 1 is per Table 3; all materials being mixed together, filtered and subsequently added to the aqueous portion.

This is the replacement sheet

Date: 05 JUL 1996

TABLE # 1

FORMULATION NAME	INGREDIENT TYPE				
		#1	#2	#3	#4
Neocryl CL-340 (40% solids)	polymer	100.0	100.0	100.0	100.0
DMAMP-80 (Angus)	tertiary amine neutralizer	0.0	0.0	2.3	0.0
AMP-95 (Angus)	primary amine neutralizer	0.0	0.0	0.0	2.3
DSX-1514 (Henkel)	associative thickener	4.5	9.0	2.3	2.3
Deionized Water	primary solvent	100.0	100.0	100.0	100.0
BYK-033 (BYK/Chemie)	antifoam	1.0	1.0	1.0	1.0
Monomer Base	see Table #3	20.5	20.5	20.5	20.5
Q4-3667 (Dow Corning)	slip aid	0.45	0.45	0.45	0.45
Fluorad FC170-C (3M)	surface tension modifier	1.0	1.0	1.0	1.0
Texanol (Eastman)	coalescing solvent	4.5	4.5	4.5	4.5

Neocryl CL-340 is a styrene/acrylic polymer having an acid number of about 160.
Q4-3667 (Dow) is an 80:20 mixture of polyether modified dimethylsiloxanes and cyclodimethylsiloxanes.

This is the replacement sheet

Date: 05 JUL 1996

TABLE # 2

FORMULATION

NAME

	#1	#2	#3	#4
DMAMP-80	0.0	0.0	2.3	0.0
AMP-95 (Angus)	0.0	0.0	0.0	2.3
DSX-1514 (Henkel)	4.5	9.0	2.3	2.3

PERFORMANCE RESULTS

Viscosity (initial)	3500 cps	5000 cps	2900 cps	3200 cps
Viscosity (1 week holding)	3500 cps	5000 cps	2700 cps	2700 cps
Odor	none	none	slight fishy	slight ammonia
Emulsion Stability	good	very good	fair to good	good
Substrate Staining	no stain	no stain	slight stain	slight stain
Alkaline Resistance	good	good	fair to good	fair to good
Coating Defects	0 voids/ft2	0 voids/ft2	2 voids/ft2	2 void/ft2
Coating Uniformity	slight ribbing	no ribbing	moderate ribbing	slight ribbing
Developing Time	29 sec.	29 sec.	27 sec.	28 sec.
Photospeed (at 100 mJ/cm ²)	Copper 8	Copper 8	Copper 7	Copper 7
Circuit Pattern Defects	1 defect/ft2	0 defects/ft2	3 defects/ft2	4 defects/ft2

DMAMP = 2-dimethylamino-2-methyl-1-propanol; AMP = 2-amino-2-methyl-1-propanol.

This is the replacement sheet

Date:

05 JUL 1996

TABLE #3

<u>MONOMER BASE</u> <u>COMPONENTS</u>	<u>COMPONENT</u> <u>TYPE</u>	<u>GRAMS PER</u> <u>FORMULA</u>
Ethoxylated TMPTA (3 moles ethoxylation)	multi functional acrylate	17.6
Modaflow	flow additive	0.05
Antioxidant 2246	antioxidant	0.03
Quantacure ITX (thioxanthone)	photosensitizer	0.59
Quantacure EPD (3° amine)	photoinitiator	1.49
Baso Blue 688	background dye	0.09
Triphenylphosphine	antioxidant	0.5
Benzotriazole	adhesion promoter	0.25

TMPTA = trimethylol propane triacrylate

This is the replacement sheet

Date:

05 JUL 1966

PROCESSING CONDITIONS

Coating - Burkle (single sided) Roller Coater, 22 threads per inch
Substrate - Copper Clad
Exposure - HMW ORC, model 301 B, diazo artwork
Development - 1% sodium carbonate monohydrate, 85° F, 2x breakpoint
Etching - 3 normal cupric chloride, 140° F, 1.3 x minimum etch
Stripping - 3% sodium hydroxide, 130° F

PERFORMANCE EXPLANATION

Viscosity - measured on a Brookfield viscometer initially and after one week at 70° F
Odor - the odor was observed after coating and before drying
Emulsion Stability - stability was rated based on the overall uniformity of the lacquer mixture
Alkaline Resistance - the resistance was measured after alkaline etch at pH 9.2
Coating Defects - the number of coating voids (thin spots) were counted after roller coating
Coating Uniformity - the uniformity was observed immediately after coating
Developing Time - twice the amount of time required to remove the unexposed resist
Photospeed - using a Stouffer 21 step to measure the last remaining step (each step varies by $\sqrt{2}$)
(Note: a higher step would indicate a higher degree of polymerization)
Circuit Pattern Defects - the total number of circuit shorts and opens were measured
(Note: the artwork pattern contained 4 mil lines and 4 mil spaces)

This is the replacement sheet

Date:

05 JUL 1996

Examples 5-33
Various poly(siloxanes) were tested in the base formula below using the processing conditions of Examples 1-4.

Neocryl CL-340 (40% solids)	100.0
DMAMP-80 (Angus)	1.0
DSX-1514 (Henkel)	7.0
Deionized Water	100.0
BYK-033 (BYK/Chemie)	1.0
Monomer Base (see Table #3)	20.5
Fluorad FC170-C (3M)	1.0
Texanol (Eastman)	4.5

Results are as per Table 4 below

This is the replacement sheet

Date: 05 JUL 1996

TABLE 4

Formulation Name	Molecular Weight	#5	#6	#7	#8	#9	#10
Cyclodimethylsiloxane	< 1,000	0.45	0	0	0	0	0
	> 1,000	0	0.45	0	0	0	0
Polyether modified dimethylsiloxane	< 1,000	0	0	0.45	0	0	0
	> 1,000	0	0	0	0.45	0	0
Dimethylsiloxane	< 1,000	0	0	0	0	0.45	0
	> 1,000	0	0	0	0	0	0.45
PERFORMANCE RESULTS							
Solubility in Water		soluble	partially soluble	soluble	soluble	partially soluble	not soluble
Tack to the Artwork		moderate	slight to moderate	slight	slight	moderate	moderate
Coating Defects		none	slight cratering	none	none	slight cratering	slight cratering

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#11	#12	#13	#14	#15	#16
Cyclodimethylsiloxane	< 1,000	0.22	0.22	0.22	0.22	0.22	0
	> 1,000	0	0	0	0	0	0
Polyether modified dimethylsiloxane	< 1,000	0.22	0	0	0	0	0
	> 1,000	0	0.22	0	0	0	0
Dimethylsiloxane	< 1,000	0	0	0.22	0	0	0
	> 1,000	0	0	0	0.22	0	0
PERFORMANCE RESULTS							
Solubility in Water		soluble	soluble	soluble	soluble	soluble	n.a
Tack to the Artwork		slight	none	slight to moderate	slight to moderate	moderate to severe	severe
Coating Defects		none	none	very slight cratering	slight cratering	none	none

This is the replacement sheet

Date: 05 JUL 1996

Date: 05 JUL 1996

- 20 -

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#17	#18	#19	#20	#21	#22
Cyclodimethylsiloxane	< 1,000	0	0	0	0	0	0
	> 1,000	0.22	0.22	0.22	0.22	0.22	0
Polyether modified dimethylsiloxane	< 1,000	0.22	0	0	0	0	0
	> 1,000	0	0.22	0	0	0	0
Dimethylsiloxane	< 1,000	0	0	0.22	0	0	0
	> 1,000	0	0	0	0.22	0	0
PERFORMANCE RESULTS							
Solubility in Water		soluble	partially soluble	partially soluble	partially soluble	soluble	n.a
Tack to the Artwork		very slight	none	slight	slight	moderate to severe	severe
Coating Defects		slight cratering	slight to moderate cratering	slight to moderate cratering	moderate cratering	slight cratering	none

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#23	#24	#25	#26	#27	#28
Cyclodimethylsiloxane	< 1,000	0.22	0	0	0	0	0
	> 1,000	0.22	0	0	0	0	0
Polyether modified dimethylsiloxane	< 1,000	0	0.22	0	0.22	0.22	0
	> 1,000	0	0.22	0	0	0	0
Dimethylsiloxane	< 1,000	0	0	0.22	0.22	0	0
	> 1,000	0	0	0.22	0	0.22	0
PERFORMANCE RESULTS							
Solubility in Water		soluble	soluble	partially soluble	soluble	partially soluble	n.a
Tack to the Artwork		very slight	very slight	slight	slight	slight	severe
Coating Defects		none	none	slight to moderate cratering	slight to moderate cratering	slight cratering	none

TABLE 4 CONTINUED

Formulation Name	Molecular Weight	#29	#30	#31	#32	#33
Cyclodimethylsiloxane	< 1,000	0.22	0.11	0.33	0	0
	> 1,000	0.22	0.33	0.11	0.22	0
PERFORMANCE RESULTS						
Solubility in Water		soluble	soluble	soluble	soluble	soluble
Tack to the Artwork		none	none	very slight	very slight	none
Coating Defects		none	none	none	none	slight cratering

This is the replacement sheet

Date: 05 JUL 1996



CLAIMS:

1. A photoimageable composition that can be borne in water comprising

A) between 30 and 80 wt% of a latex binder polymer having carboxylic acid functionality which provides an acid number of between 50 and 250;

B) between 15 and 50 wt% of a fraction of alpha,beta-ethylenically unsaturated monomers;

C) between 0.1 and 25 wt% of a photoinitiator or photoinitiator chemical system which generates free radicals;

D) between 1 and 40 wt% of a neutralizing base and/or a polyether polyurethane associate thickener in an amount sufficient to stabilize an emulsion of said latex binder polymer; and

E) between 0.1 and 10 wt% of a poly(siloxane) or mixture of (poly siloxanes) said weight percentages being based on total weight of components A-E.

2. A photoimageable composition in accordance with claim 1 wherein said poly (siloxane) is selected from poly(dimethylsiloxane) and cyclopoly(dimethylsiloxane).

3. A photoimageable composition in accordance with Claim 1 where said poly(siloxanes) are a mixture of polyether modified poly(dimethylsiloxane) at a weight ratio of between 1:9 and 9:1

4. A photoimageable composition according to any preceding claim dispersed in an aqueous medium.

5. A dry film comprising a polymeric support sheet and a layer of a photoimageable composition according to any one of claims 1 to 3 thereon.

This Sheet Has Been Replaced



This is the replacement sheet

Date:

05 JUL 1996

ABSTRACT

WATERBORNE PHOTORESISTS HAVING POLYSILOXANES

A waterborne photoimageable composition or photoresist comprises a latex binder polymer having sufficient carboxylic acid functionality to render it developable in alkaline aqueous solution, a photopolymerizeable monomer fraction, a photoinitiator chemical system and a poly(siloxane(s)).

This is the replacement sheet

Date: 05 JUL 1996

2-4011000



- 22 -

REPLACEMENT SHEETS		SG
☐ Description	: paged to paged	
☒ Claim(s)	: paged 22 to paged 22a	
☐ Drawing(s)	: paged to paged	
☐ Abstract	: paged to paged	
DATE OF RECEIPT		22 JUL 1997

CLAIMS:

1. A water-borne photoimageable composition comprising
 - A) between 30 and 80 wt% of a latex binder polymer having carboxylic acid functionality which provides an acid number of between 50 and 250;
 - B) between 15 and 50 wt% of a fraction of alpha,beta-ethylenically unsaturated monomers;
 - C) between 0.1 and 25 wt% of a photoinitiator or photoinitiator chemical system which generates free radicals; and
 - D) between 1 and 40 wt% of a neutralizing base and/or a polyether polyurethane associate thickener in an amount sufficient to stabilize an emulsion of said latex binder polymer; characterized in that said composition further comprises:
 - E) between 0.1 and 10 wt% of a mixture of cyclopoly (dimethylsiloxanes) and polyether modified poly(dimethylsiloxane) at a weight ratio of between 1:9 and 9:1, said weight percentages being based on total weight of components A-E.
2. A photoimageable composition in accordance with claim 1 wherein said cyclopoly(dimethylsiloxane) has a weight average molecular weight less than 1,000.
3. A photoimageable composition in accordance with claim 2 wherein said cyclopoly(dimethylsiloxane) has a weight average molecular weight of 100 to 600.
4. A photoimageable composition according to any preceding claim wherein the modified poly(dimethylsiloxane) has a weight average molecular weight of more than 1000.
5. A photoimageable composition according to claim

This is the replacement sheet

Date: 22 JUL 1997



4 wherein the weight average molecular weight of the modified poly(dimethylsiloxane) is from 2,000 to 500,000.

6. A photoimageable composition according to any preceding claim which contains 20 to 40 wt.% solids.

7. A photoimageable composition according to claim 6 which comprises

10 to 30 wt.% of binder polymer (A),

3 to 20 wt.% of unsaturated monomers (B),

0.3 to 10 wt.% of photoinitiator (C),

1.5 to 20 wt.% of neutralizing base and/or thickener (D) and

0.02 to 1 wt.% of polysiloxanes (E), the percentages being based on the total composition.

8. A photoimageable composition according to claim 7 which additionally contains 0.06 to 2 wt.%, based on the total composition, of a fluoroaliphatic oxyethylene adduct surfactant.

9. A dry film comprising a polymeric support sheet and a layer of a photoimageable composition formed by applying to the sheet a water-borne photoimageable composition according to any preceding claim.

This is the replacement sheet

Date: 22 JUL 1997