

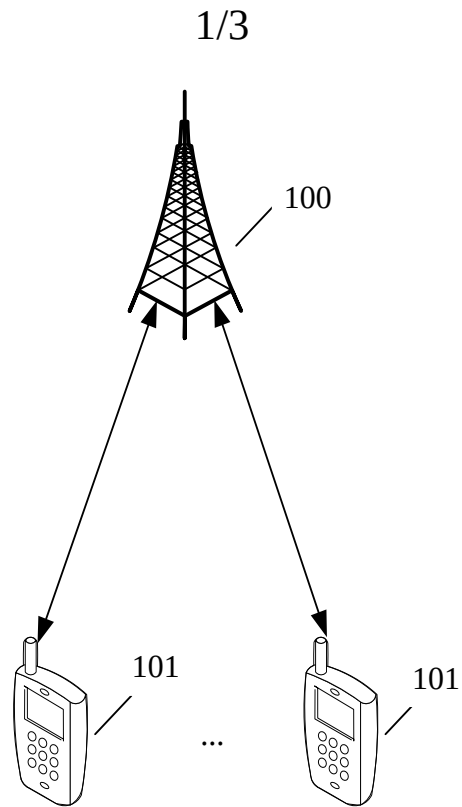


FIG. 1

In a case that M feedback messages are to be sent in a same time unit, a terminal device sends an uplink control channel on a target resource in the time unit, where the uplink control channel carries the M feedback messages

201

FIG. 2

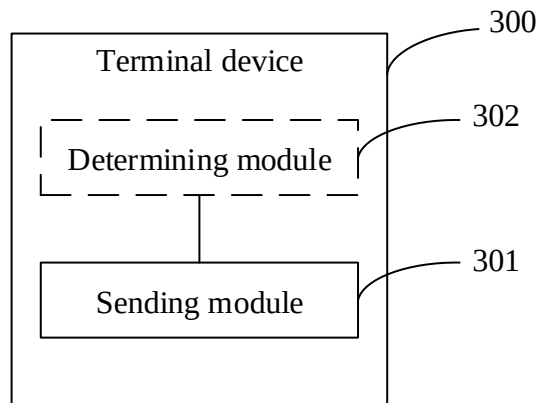


FIG. 3

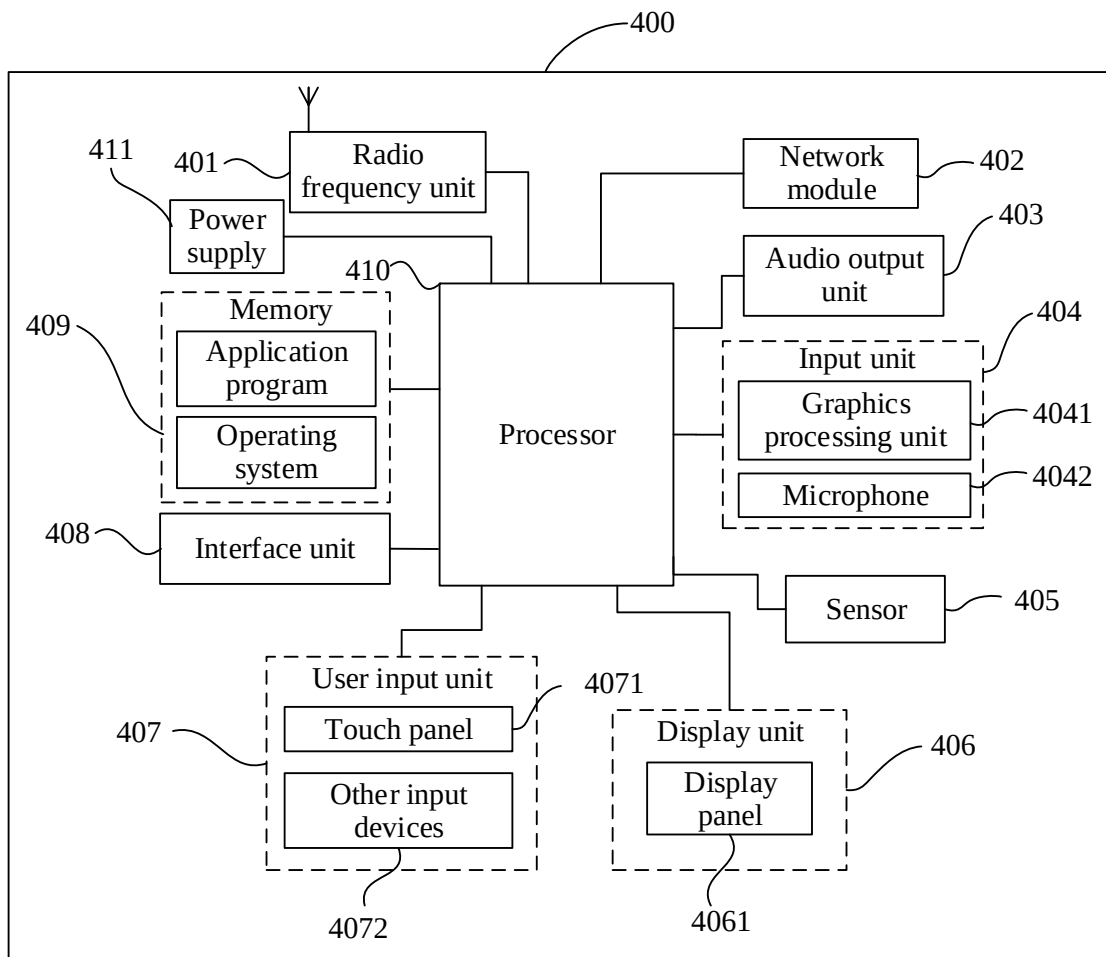


FIG. 4

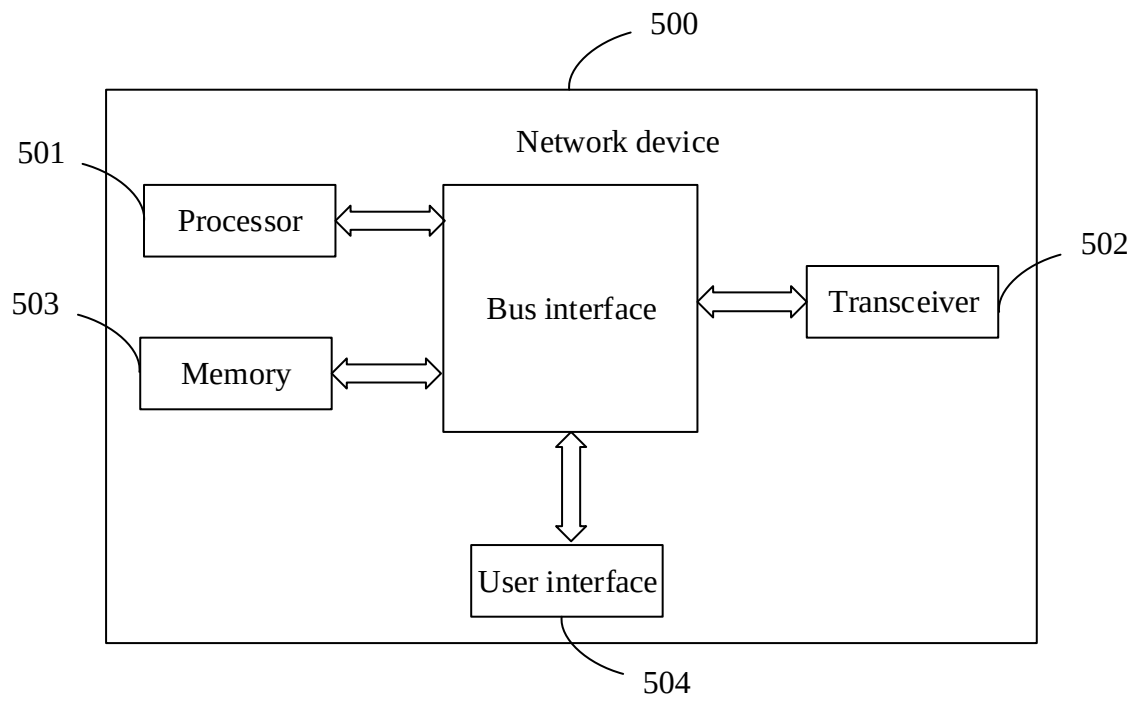


FIG. 5