



- (51) **International Patent Classification:**
E21B 43/08 (2006.01) *E21B 43/10* (2006.01)
- (21) **International Application Number:**
PCT/US2013/076505
- (22) **International Filing Date:**
19 December 2013 (19.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) **Inventors:** MURPHREE, Zachary Ryan; 6550 Shady Brook Lane, #516, Dallas, Texas 75206 (US). FRIPP, Michael Linley; 3826 Cemetery Hill Road, Carrollton, Texas 75007 (US). FROSELL, Thomas Jules; 7409 Bradford Pear Drive, Irving, Texas 75063 (US).
- (74) **Agents:** PRATT, John S. et al.; Kilpatrick Townsend & Stockton LLP, 1100 Peachtree Street, Suite 2800, Atlanta, Georgia 30309 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) **Title:** INTERVENTION TOOL FOR DELIVERING SELF-ASSEMBLING REPAIR FLUID

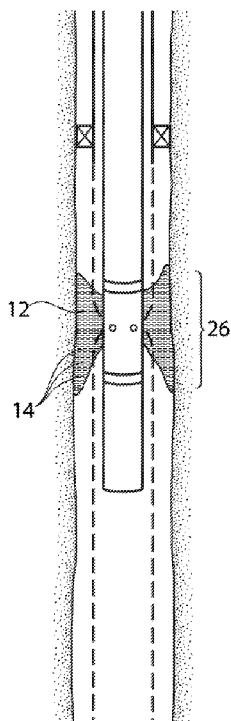


FIG. 3

(57) **Abstract:** Certain aspects are directed to devices for use in a wellbore in a subterranean formation. There is provided an intervention tool that may be used to set a self-assembling remedial screen, patch, plug, create a remedial isolation zone, conduct remedial securement, or otherwise provide a remedial fix to one or more components of the completion in a downhole configuration. The intervention tool may have a tool shaft, at least two magnets positioned with respect to the tool shaft, a carrier fluid containing magnetically responsive particles, one or more injection ports on the tool shaft, and a fluid deployment system to cause deployment of the carrier fluid out of the tool shaft through the one or more injection ports.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, KM, ML, MR, NE, SN, TD, TG).