



(51) International Patent Classification:
H01L 29/786 (2006.01) *H01L 51/50* (2006.01)

(21) International Application Number:
PCT/JP2010/067193

(22) International Filing Date:
24 September 2010 (24.09.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2009-242757 21 October 2009 (21.10.2009) JP
2009-278997 8 December 2009 (08.12.2009) JP

(71) Applicant (for all designated States except US): SEMI-CONDUCTOR ENERGY LABORATORY CO., LTD. [JP/JP]; 398, Hase, Atsugi-shi, Kanagawa, 2430036 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): YAMAZAKI, Shunpei [JP/JP]; c/o SEMICONDUCTOR ENERGY LABORATORY CO., LTD., 398, Hase, Atsugi-shi, Kanagawa, 2430036 (JP). KOYAMA, Jun. MIYAKE, Hiroyuki.

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DISPLAY DEVICE AND ELECTRONIC DEVICE INCLUDING DISPLAY DEVICE

FIG. 15

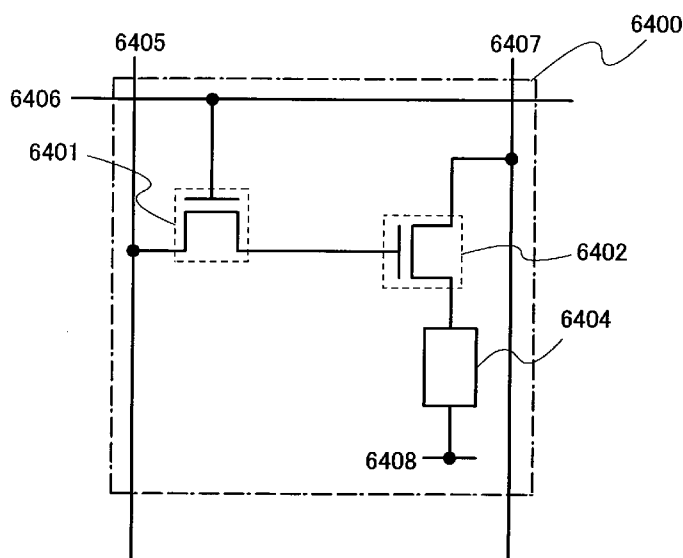

(57) Abstract: Objects are to provide a display device the power consumption of which is reduced, to provide a self-luminous display device the power consumption of which is reduced and which is capable of long-term use in a dark place. A circuit is formed using a thin film transistor in which a highly-purified oxide semiconductor is used and a pixel can keep a certain state (a state in which a video signal has been written). As a result, even in the case of displaying a still image, stable operation is easily performed. In addition, an operation interval of a driver circuit can be extended, which results in a reduction in power consumption of a display device. Moreover, a light-storing material is used in a pixel portion of a self-luminous display device to store light, whereby the display device can be used in a dark place for a long time.