



(51) International Patent Classification:

G01N 35/02 (2006.01) *B81C 1/00* (2006.01)
B01J 19/00 (2006.01) *G01N 37/00* (2006.01)
B81B 1/00 (2006.01)

(21) International Application Number:

PCT/JP2014/055884

(22) International Filing Date:

28 February 2014 (28.02.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2013-038834	28 February 2013 (28.02.2013)	JP
2013-114411	30 May 2013 (30.05.2013)	JP
2013-194560	19 September 2013 (19.09.2013)	JP
2014-002861	10 January 2014 (10.01.2014)	JP

(71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventor; and

(71) Applicant (for US only): **KOBAYASHI, Rie** [JP/JP]; c/o Ricoh Company, Ltd., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).(74) Agent: **HIROTA, Koichi**; HIROTA, NAGARE & ASSOCIATES, 4th Floor, TS Bldg., 1-24-10, Yoyogi, Shibuya-ku, Tokyo, 1510053 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUIDIC DEVICE AND FABRICATION METHOD THEREOF, AND THERMAL TRANSFER MEDIUM FOR FLUIDIC DEVICE FABRICATION

FIG. 4A

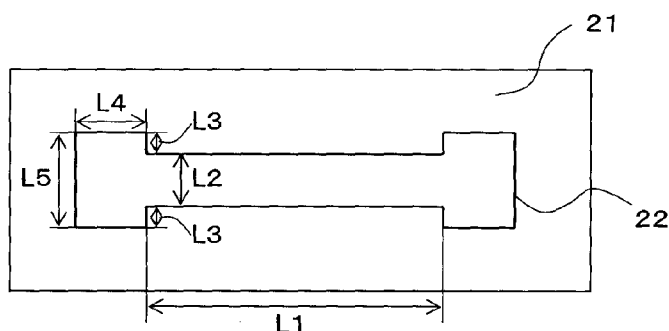

(57) Abstract: Provided is a fluidic device including: a base member; a porous layer provided over the base member; a flow path wall provided in the porous layer; and a flow path defined by an inner surface of the flow path wall and the base member. Linearity of the fluidic device is 30% or less, where the linearity is obtained by the following formula: Linearity (%) = {[A (mm)-B (mm)]/B (mm)}x100, where a length B is a length of a straight line between arbitrary two points on a contour of the inner surface of the flow path wall, and a length A is a length of a continuous line between the two points.