

07/04/04

2004019600

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
24 April 2003 (24.04.2003)

PCT

(10) International Publication Number
WO 03/034729 A1(51) International Patent Classification⁷: H04N 7/14

(21) International Application Number: PCT/US02/33930

(22) International Filing Date: 16 October 2002 (16.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/348,113 17 October 2001 (17.10.2001) US
10/099,844 13 March 2002 (13.03.2002) US

(71) Applicant: QUALCOMM, INCORPORATED
[US/US]; 5775 Morehouse Drive, San Diego, CA 92121 (US).

(72) Inventor: KIES, Jonathan, K.; 122 Townwood Way,
Encinitas, CA 92024 (US).

(74) Agents: WADSWORTH, Philip, R. et al.; 5775 More-
house Drive, San Diego, CA 92121 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR MAINTAINING A VIDEO IMAGE IN A WIRELESS COMMUNICATION DEVICE

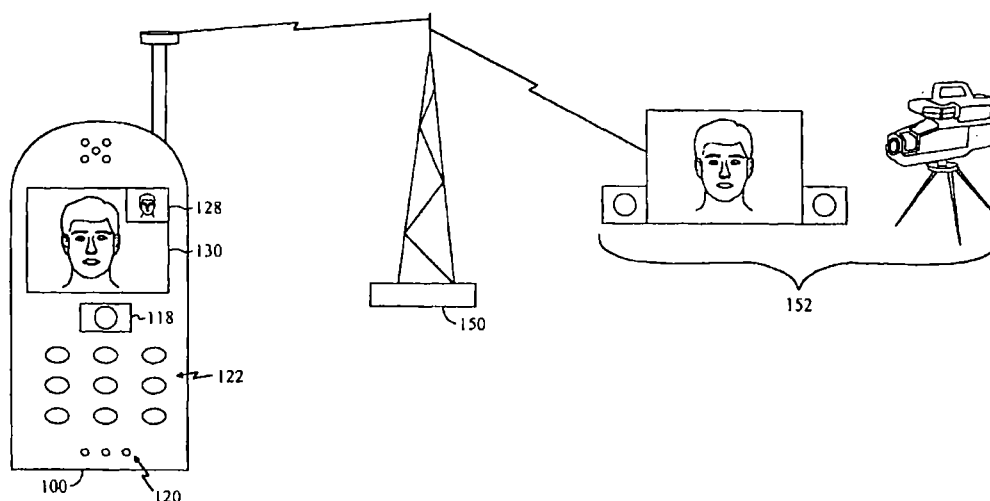

(57) Abstract: A wireless communication device (100) may include a video-input device (118), a signaling device (128), video-conferencing capabilities and other features. An image-recognition processor (126) selectively generates feedback signals based on characteristics of a face in an image received by the video-input device (118). In one embodiment, these feedback signals are used to selectively control the signaling device (128) to communicate to a user characteristics of the face in the image received by the video-input device (118), so that the user may take appropriate action if desired.



ACTION

WO 03/034729 A1