

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 June 2002 (27.06.2002)

PCT

(10) International Publication Number
WO 02/51004 A1

(51) International Patent Classification⁷: **H03H 9/21**, 9/24

(74) Agent: **I C B**; Ingénieurs Conseils en Brevets SA, Rue des Sors 7, CH-2074 Marin (CH).

(21) International Application Number: PCT/CH01/00665

(22) International Filing Date:
13 November 2001 (13.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
00204720.7 21 December 2000 (21.12.2000) EP

(71) Applicant (*for all designated States except US*):
ETA SA FABRIQUES D'EBAUCHES [CH/CH];
Schild-Rust-Strasse 17, CH-2540 Grenchen (CH).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **GIOUSOUF, Metin** [GR/DE]; Grabbrunnenstrasse 8, 73728 Esslingen (DE). **KÜCK, Heinz** [DE/DE]; Thomas-Münzer-Weg 43, 70437 Stuttgart (DE). **PLATZ, Rainer** [DE/CH]; Chemin de Trois-Portes 18, CH-2000 Neuchâtel (CH).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: TIME BASE COMPRISING AN INTEGRATED MICROMECHANICAL TUNING FORK RESONATOR

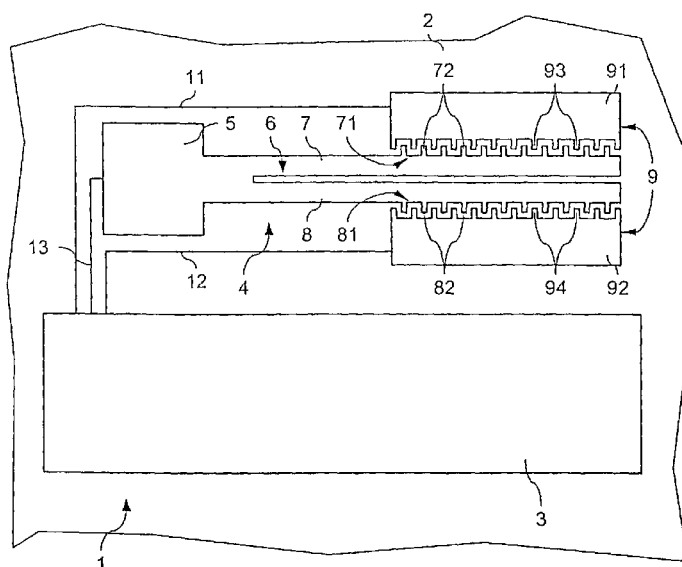

(57) Abstract: There is described a time base comprising a resonator (4) and an integrated electronic circuit (3) for driving the resonator into oscillation and for producing, in response to this oscillation, a signal having a determined frequency. The resonator is an integrated micromechanical tuning fork resonator (4) supported above a substrate (2) and adapted to oscillate in a plane substantially parallel to the substrate. The tuning fork resonator comprises a base member (5) extending substantially perpendicularly from the substrate, a free-substantially parallel fork tines (7, 8) and an electrode structure (9) disposed adjacent to the fork tines and connected to the integrated electronic circuit.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.