

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 November 2007 (08.11.2007)

PCT

(10) International Publication Number
WO 2007/126601 A3

(51) International Patent Classification:
H01L 27/146 (2006.01) **H04N 5/217** (2006.01)
H04N 3/15 (2006.01)

(21) International Application Number:
PCT/US2007/006609

(22) International Filing Date: 16 March 2007 (16.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/392,792 30 March 2006 (30.03.2006) US

(71) Applicant (for all designated States except US): **MICRON TECHNOLOGY, INC.** [US/US]; 8000 S. Federal Way, Boise, ID 83707-0006 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LADD, John** [US/US]; 3921 W. Targee Street, Boise, ID 83705 (US).

(74) Agent: **D'AMICO, Thomas, J.**; Dickstein Shapiro LLP, 1825 Eye Street, NW, Washington, DC 20006-5403 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
7 February 2008

(54) Title: REDUCING NOISE IN AN IMAGER

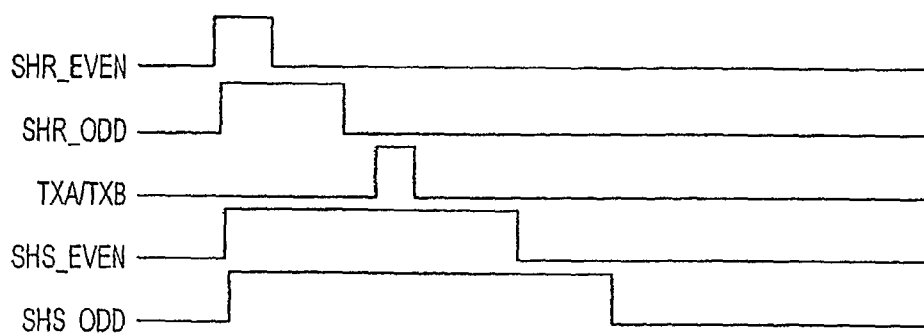

(57) Abstract: A method of operating an imager to have increased capacitance on a pixel output or column output line during most reset signal and pixel signal sampling operations from the line. The increased capacitance is achieved by switching in multiple sample and hold capacitors during the sampling operations.



WO 2007/126601 A3