



(51) International Patent Classification:

H04M 11/04 (2006.01) **H04M 3/51** (2006.01)
H04M 3/42 (2006.01)

(21) International Application Number:

PCT/US2022/071885

(22) International Filing Date:

22 April 2022 (22.04.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/238,892 23 April 2021 (23.04.2021) US

(71) Applicant: **PRIORITY DISPATCH CORPORATION**
[US/US]; 139 East South Temple, Suite 500, Salt Lake City,
Utah 84111 (US).

(72) Inventor; and

(71) Applicant: **CLAWSON, Jeffrey J.** [US/US]; 4669 S Farm
Meadow Lane, Holladay, Utah 84117 (US).

(72) Inventor: **MCDANIEL, Ronald**; 110 S Regent Street,
Suite 500, Salt Lake City, Utah 84111 (US).

(74) Agent: **THOMPSON, John R.**; 201 South Main Street,
Suite 1100, Salt Lake City, Utah 84111 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH,
KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND METHOD FOR EMERGENCY DISPATCH

(57) Abstract: A computer device generates a response to an emergency being reported by a plurality of sensor devices. The memory contains a sensor data engine and a determinant code calculator. The computer device determines the likelihood of an emergency based on received sensor data and, in some embodiments, answers received from an information provider. The sensor data engine receives external sensor data, determines data values associated with the external sensor data, and calculates an emergency likelihood based on the data values. The determinant code calculator generates a determinant code based on the calculated likelihood, and provides the code to an emergency responder system to generate an emergency dispatch response.

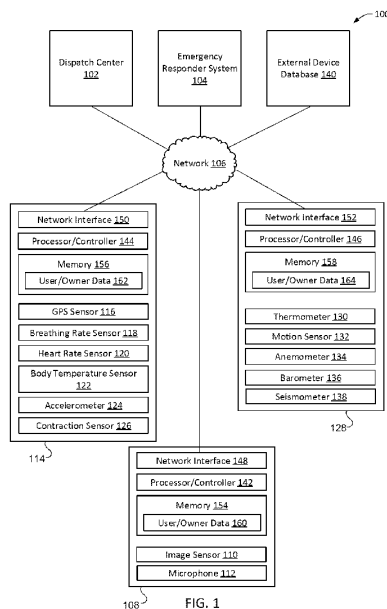


FIG. 1