



(51) International Patent Classification:

E03C 1/04 (2006.01) E03C 1/08 (2006.01)
E03C 1/046 (2006.01)

(21) International Application Number:

PCT/EP2021/082266

(22) International Filing Date:

19 November 2021 (19.11.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

01477/20 20 November 2020 (20.11.2020) CH

(71) Applicant: **GJOSA SA** [CH/CH]; La Haute-Route 78,
2502 Biel/Bienne (CH).

(72) Inventors: **PERRIN, Victor**; c/o Gjosa SA, La Haute-
Route 78, 2502 Biel/Bienne (CH). **GANSCHOF VAN DER**

MEERSCH, Nicolas; c/o Gjosa SA, La Haute-Route 78,
2502 Biel/Bienne (CH). **MOCK, Elmar**; c/o Gjosa SA, La
Haute-Route 78, 2502 Biel/Bienne (CH). **SCHLAPPACH,**
Marc; c/o Gjosa SA, La Haute-Route 78, 2502 Biel/Bi-
enne (CH). **JACKSON, Caroline**; c/o Gjosa SA, La Haute-
Route 78, 2502 Biel/Bienne (CH). **GABELLA, Thomas**; c/
o Gjosa SA, La Haute-Route 78, 2502 Biel/Bienne (CH).

(74) Agent: **FREI PATENT ATTORNEYS (ZUSAM-
MENSCHLUSS 214)**; c/o Frei Patentanwaltsbüro AG,
Postfach, 8032 Zürich (CH).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,

(54) Title: WATER CONDITIONING UNIT FOR A WASHING DEVICE, AND DISPENSING UNIT

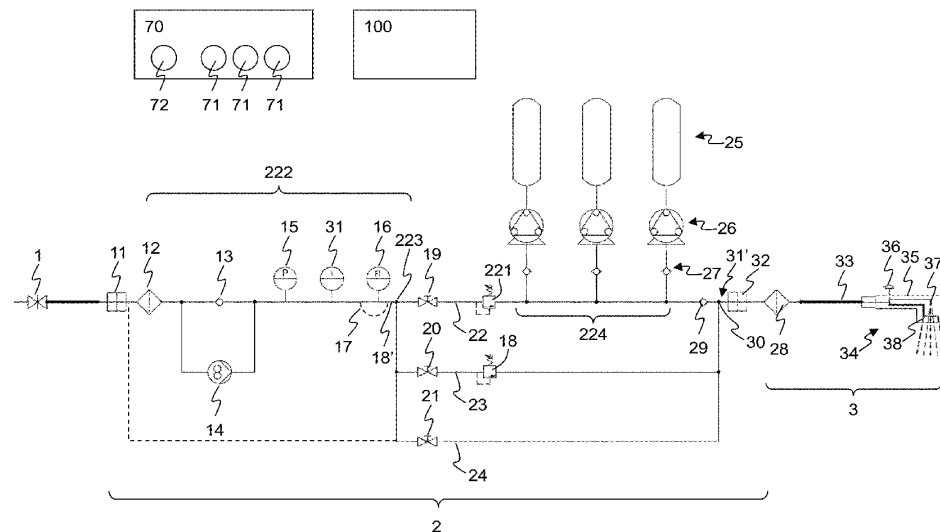


Fig. 1

(57) Abstract: A water conditioning unit (2) for a washing device (10) is configured to provide water at different flow rates and with different spraying characteristics and with additives admixed to the water, the water conditioning unit (2). It comprises an inlet fitting (11) for attaching it to a water supply and an outlet fitting (32) for attaching it to a dispensing unit (3); one, two or more docking adapters (76) configured for attaching, one, two or more additive containers (25). Hydraulic elements guiding and controlling a flow of water between the inlet fitting (11) and the outlet fitting (32) are implemented in a hydraulic assembly (50) comprising a total manifold (57) and hydraulic elements, the total manifold (57) comprising internal channels guiding the flow of water and carrying the hydraulic elements.

[Continued on next page]

NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*