

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/026713 A1

- (51) International Patent Classification⁷: **B65D 19/18**, (74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box 4188, S-203 13 Malmö (SE).
- (21) International Application Number: PCT/SE2003/001437
- (22) International Filing Date: 15 September 2003 (15.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0202779-5 18 September 2002 (18.09.2002) SE
- (71) Applicant (for all designated States except US): **INTER IKEA SYSTEMS B.V.** [NL/NL]; Olof Palmestraat 1, NL-2616 LN Delft (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DICKNER, Allan** [SE/SE]; Storkstigen 16, S-343 35 Älmhult (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A LOADING LEDGE

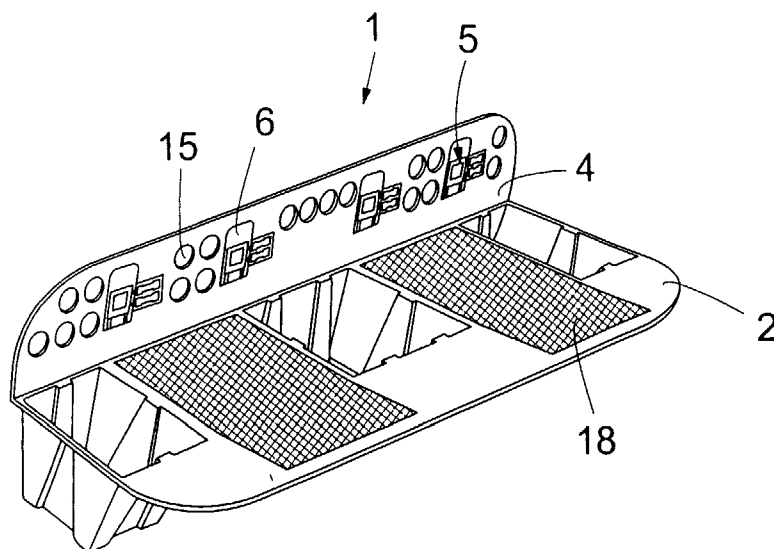

(57) **Abstract:** The present invention concerns a loading ledge (1) to be used e.g. in transport and storing and a system for creation of load units. The loading ledge (1) has an upper leg (4) and a lower leg (2) forming a substantially L-shaped cross-section. The lower leg (2) is furnished with one or more projections (3), to make it possible to use handling equipment. One or more locking means (5) are integrated in the loading ledge (1) to grip straps or the like. A load unit is created in that two or more loading ledges (1) are used together with straps to fixate the goods (19) on the loading ledges (1).