

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20201 A1

- (51) International Patent Classification⁷: F16J 15/12, F16L 41/04
- (74) Agent: HARRISON GODDARD FOOTE; Tower House, Merrion Way, Leeds LS2 8PA (GB).
- (21) International Application Number: PCT/GB00/03547
- (22) International Filing Date:
15 September 2000 (15.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
9921791.1 16 September 1999 (16.09.1999) GB
- (71) Applicant (for all designated States except US): FTL SEALS TECHNOLOGY LIMITED [GB/GB]; Bruntcliffe Avenue, Leeds 27 Business Park, Morley, Leeds LS27 0TG (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SMITH, Steve [GB/GB]; 30 The Spinney, Street Lane, Moortown, Leeds LS17 6SP (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEAL ASSEMBLY

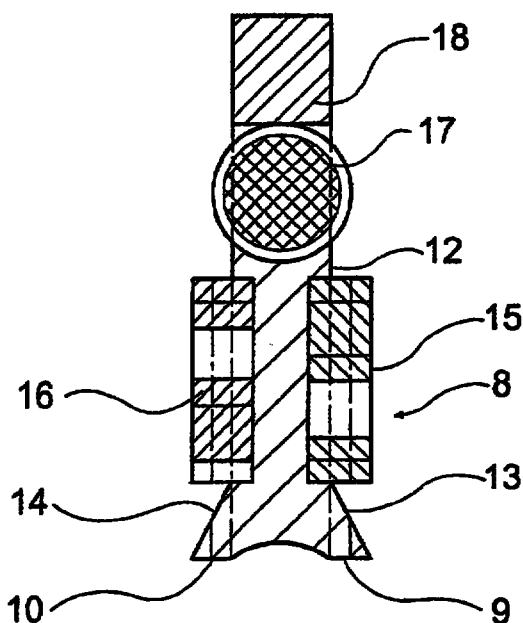

(57) Abstract: There is described a seal assembly and a method of sealing parallel, planar, arcuate or convex surfaces. The seal assembly comprises a ring seal provided with a pair of primary sealing lips (9, 10), radially disposed on a first, circumferential face of the ring (8); a second, radial face (13, 14) being provided with means (15, 16) for dispersing pressurised fluid. There is also provided a method of introducing a three way joint into a pipeline.

WO 01/20201 A1