

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
19 March 2020 (19.03.2020)



(10) International Publication Number
WO 2020/055876 A1

(51) International Patent Classification:
G01N 33/00 (2006.01) G06K 9/62 (2006.01)
G06K 9/00 (2006.01)

(21) International Application Number:
PCT/US2019/050422

(22) International Filing Date:
10 September 2019 (10.09.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/729,002 10 September 2018 (10.09.2018) US

(71) Applicant: ENVIROEYE LLC [US/US]; 4635 SW Free-
way, Ste. 910, Houston, TX 77277 (US).

(72) Inventor; and

(71) Applicant: KLEINEKE, Ronald [US/US]; 154 Garden
Drive, Wintersville, OH 43953 (US).

(72) Inventor: RAUCH, Mark, S.; 5441 Tupper Lake, Hous-
ton, TX 77056 (US).

(74) Agent: FORMAN, Adam, J. et al.; Baker & Hostetler LLP,
2929 Arch Street, Cira Centre, 12th Floor, Philadelphia, PA
19104-2891 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

(54) Title: OIL MONITORING SYSTEM

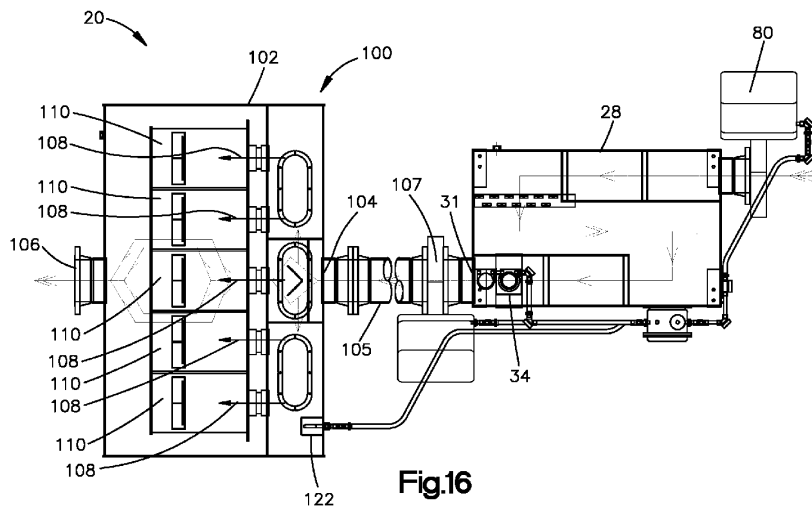


Fig.16

(57) Abstract: A filter system has a chamber body, an inlet that extends through the chamber body, and an outlet that extends through the chamber body at a location downstream of the inlet. The filter system has a plurality of fluid flow paths that extend between the inlet and the outlet. The plurality of fluid flow paths including first and second subsets, each including at least a respective one of the fluid flow paths. A plurality of hydrocarbon filters is disposed in the chamber body such that each hydrocarbon filter is disposed in a fluid flow path. The filter system directs the fluid to the first subset, and once each hydrocarbon filter of the first subset becomes saturated with hydrocarbons, the filter systems diverts the fluid to flow to the second subset.

[Continued on next page]

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*