



(43) International Publication Date
26 November 2015 (26.11.2015)

- (51) International Patent Classification:
F16L 21/08 (2006.01) *F16L 21/04* (2006.01)
- (21) International Application Number:
PCT/EP2015/061204
- (22) International Filing Date:
21 May 2015 (21.05.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2012869 22 May 2014 (22.05.2014) NL
2013241 23 July 2014 (23.07.2014) NL
- (71) Applicant: **GEORG FISCHER WAGA N.V.** [NL/NL];
Lange Veenteweg 19, 8161 PA Epe (NL).
- (72) Inventors: **WIJLENS, Jeroen**; Vingerhoedskruit 15, 7483
BH Haaksbergen (NL). **HULSEBOS, Michel Paul**; Von-
derschottenweg 16, 7451 MN Holten (NL). **WELLINK,
Roel Alexander Maria**; Wissinksdijk 12, 7548 PD Usselo
(NL).
- (74) Agent: **FENNER, Seraina**; Georg Fischer AG, Amsler-
Laffon-Strasse 9, 8201 Schaffhausen (CH).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FITTING FOR COUPLING TO A PIPE

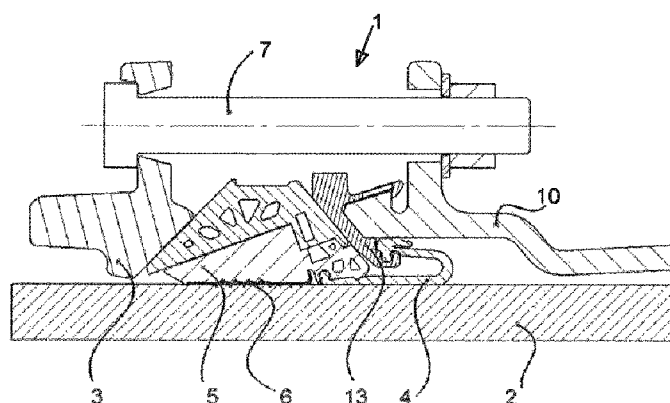

(57) Abstract: A fitting (1) for coupling to at least one pipe (2), comprising : a sleeve (10) for receiving the pipe (2); at least one sealing member (4) to provide a seal between the sleeve (10) and the pipe (2); a pressure member (5) for applying a pressure to the sleeve (10) and to the pipe (2); gripper teeth (6) provided on the pressure member (5) and arranged to act on the pipe (2); and actuation means (3, 7) for exerting a pressure to the pressure member (5) comprising a pressure ring (3) acting on the pressure member (5) through adjoining slanting contacting surfaces (11% 11'') of said pressure ring (3) and pressure member (5), respectively; wherein the at least one sealing member (4) is positioned between the pressure member (5) and the pipe (2); wherein the at least one sealing member (4) is connected with or pressed against the sleeve (10) without being positioned between the pressure member (5) and the sleeve (10).