



(51) International Patent Classification:

B01D 29/11 (2006.01) **B01D 36/00** (2006.01)
B01D 29/52 (2006.01)

(21) International Application Number:

PCT/IL2012/050458

(22) International Filing Date:

14 November 2012 (14.11.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/559,384 14 November 2011 (14.11.2011) US

(71) Applicant: **AMIAD WATER SYSTEMS LTD.** [IL/IL];
Kibbutz Amiad, 12335 D.N. Upper Galil 1 (IL).

(72) Inventors: **BENTOR, Yoram**; D.N. Jordan Valley, 15135
Kibbutz Bet Zera (IL). **BEN-HORIN, Ra'anan**; Kibbutz
Bet Zera, 15135 D.N. Jordan Valley (IL).

(74) Agent: **REINHOLD COHN AND PARTNERS**; P.O.Box
13239, 61131 Tel Aviv (IL).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUID CONTAMINATION PREVENTION SYSTEM

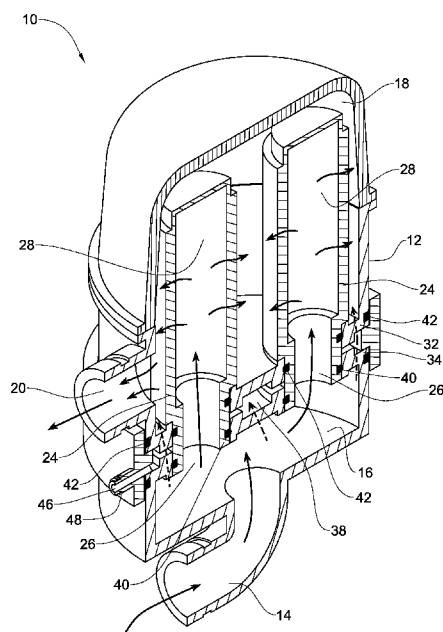


Fig. 2

(57) Abstract: The disclosed subject matter is directed to a fluid treating system comprising a housing configured with at least one fluid inlet port and at least one fluid outlet port, with at least one fluid treating chamber disposed between and being in flow communication with said at least one fluid inlet port and at least one fluid outlet port, and at least one intermediate chamber disposed between at least one inlet port and at least one of the fluid treating chamber and outlet port. The at least one intermediate chamber is vented to the atmosphere or coupleable to a vacuum source.