

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/055443 A1

(51) International Patent Classification⁷: **F24F 5/00**, 3/14

(21) International Application Number:
PCT/US2003/018090

(22) International Filing Date: 9 June 2003 (09.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/316,952 12 December 2002 (12.12.2002) US

(71) Applicant: **MUNTERS CORPORATION** [US/US]; 79
Monroe Street, Amesbury, MA 01913 (US).

(72) Inventors: **DINNAGE, Paul, A.**; 15 Morning Star Drive,
Stratham, NH 03885 (US). **YOUNG, Kevin, H.**; 23 Smith
Garrison Road, Newmarket, NH 03857 (US).

(74) Agents: **RAZZANO, Pasquale, A.** et al.; Fitzpatrick,
Cella, Harper & Scinto, 30 Rockefeller Plaza, New York,
NY 10112-3801 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DESICCANT REFRIGERANT DEHUMIDIFIER SYSTEMS

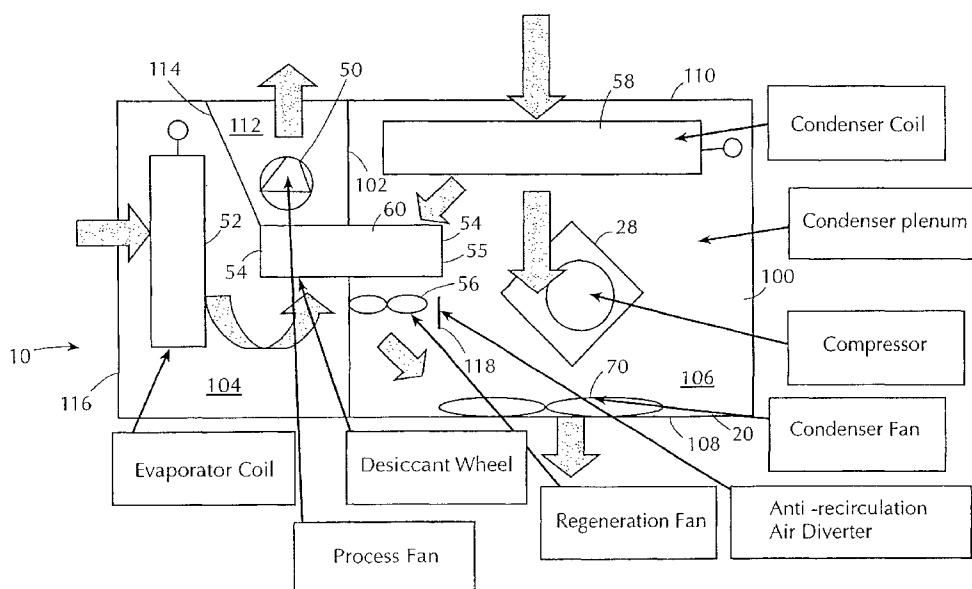

(57) Abstract: A method for conditioning air for an enclosure in which a supply air stream is cooled with a refrigerant system containing a variable compressor by passing the air over a cooling coil to reduce the temperature thereof; the thus cooled supply air stream is then passed through a segment of a rotating desiccant wheel under conditions which increase its temperature and reduce its moisture content, and then delivered to the enclosure. The desiccant wheel is regenerated by heating a regeneration air stream with the condensing coil of the refrigerant system, and then passing the heated regeneration air stream through another segment of the rotating desiccant wheel. At least one condition of the supply air stream, the regeneration air stream, and/or the refrigerant system is sensed or monitored and the output of the compressor is controlled in response to the sensed condition.

WO 2004/055443 A1