


1/12


FIG. 1

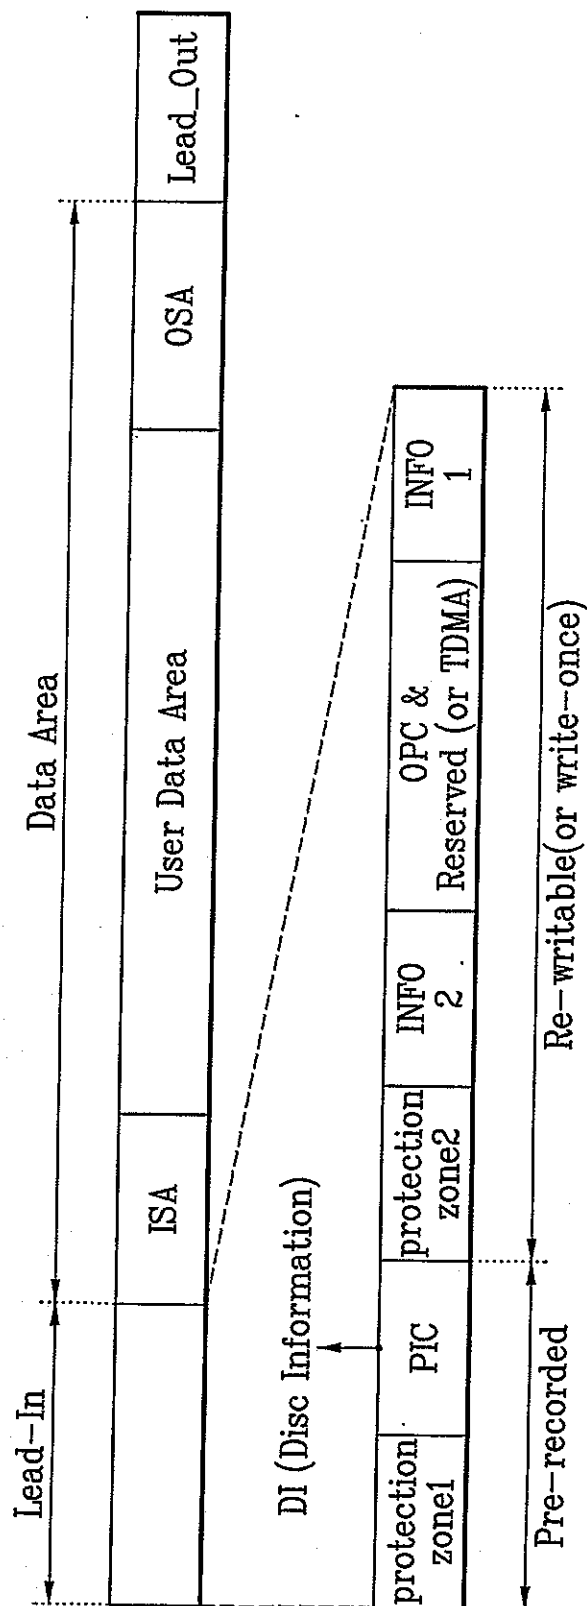

- PIC : Permanent Information & Control data
- ISA : Inner Spare Area
- OSA : Outer Spare Area
- TDMA : Temporary Defect Management Area

2/12

FIG. 2

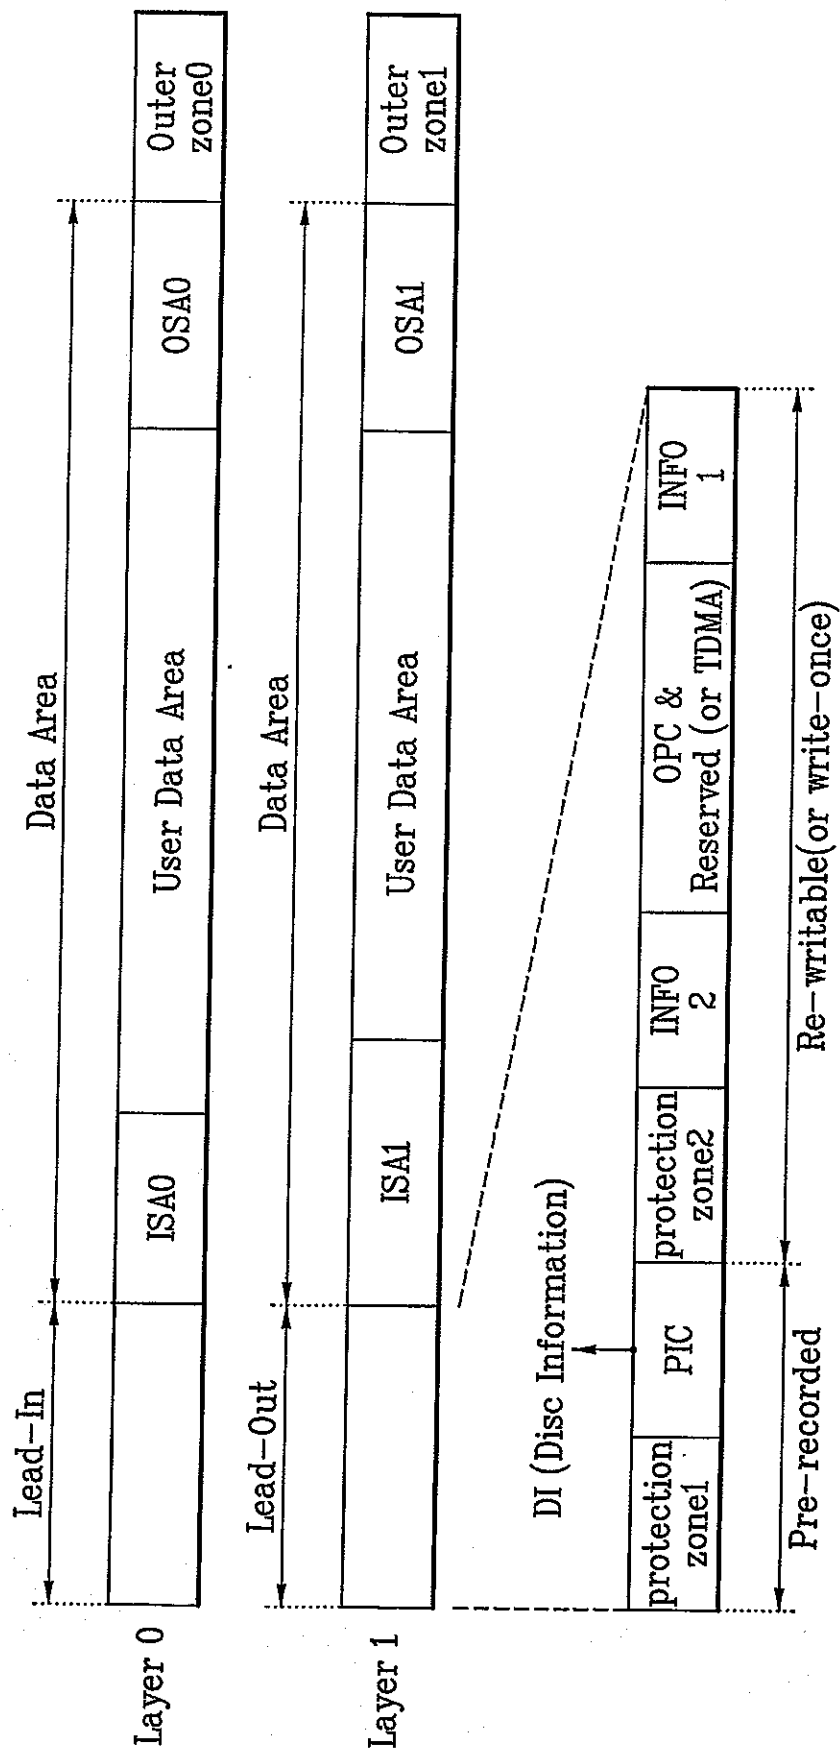

3/12


FIG. 3

PIC info Fragment number	PIC cluster number	1'st DI(Disc Information)
IF0	0	2'nd DI(Disc Information)
	1	⋮
	⋮	⋮
	543	L'th DI(Disc Information)
IF1	0	
	1	
	⋮	
	543	
IF2	0	
	1	
	⋮	
	543	
IF3	0	
	1	
	⋮	
	543	
IF4	0	
	1	
	⋮	
	543	

112 bytes

4/12


FIG. 4

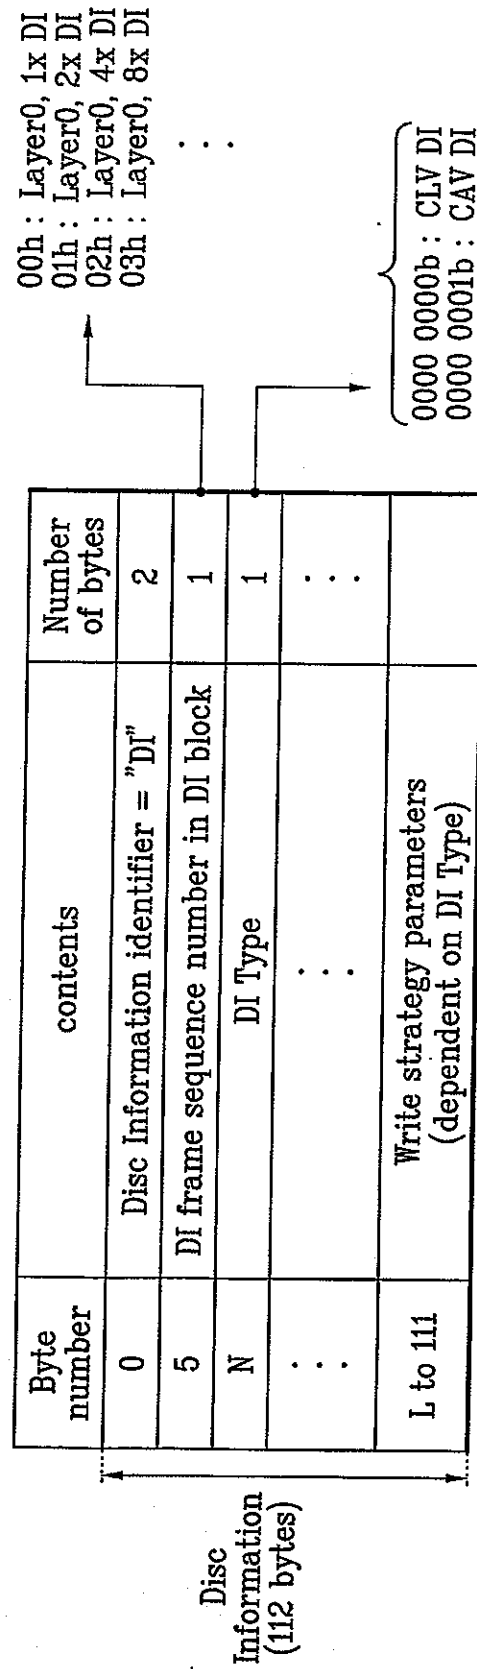

* CLV : Constant Linear Velocity
 CAV : Constant Angular Velocity

5/12

FIG. 5

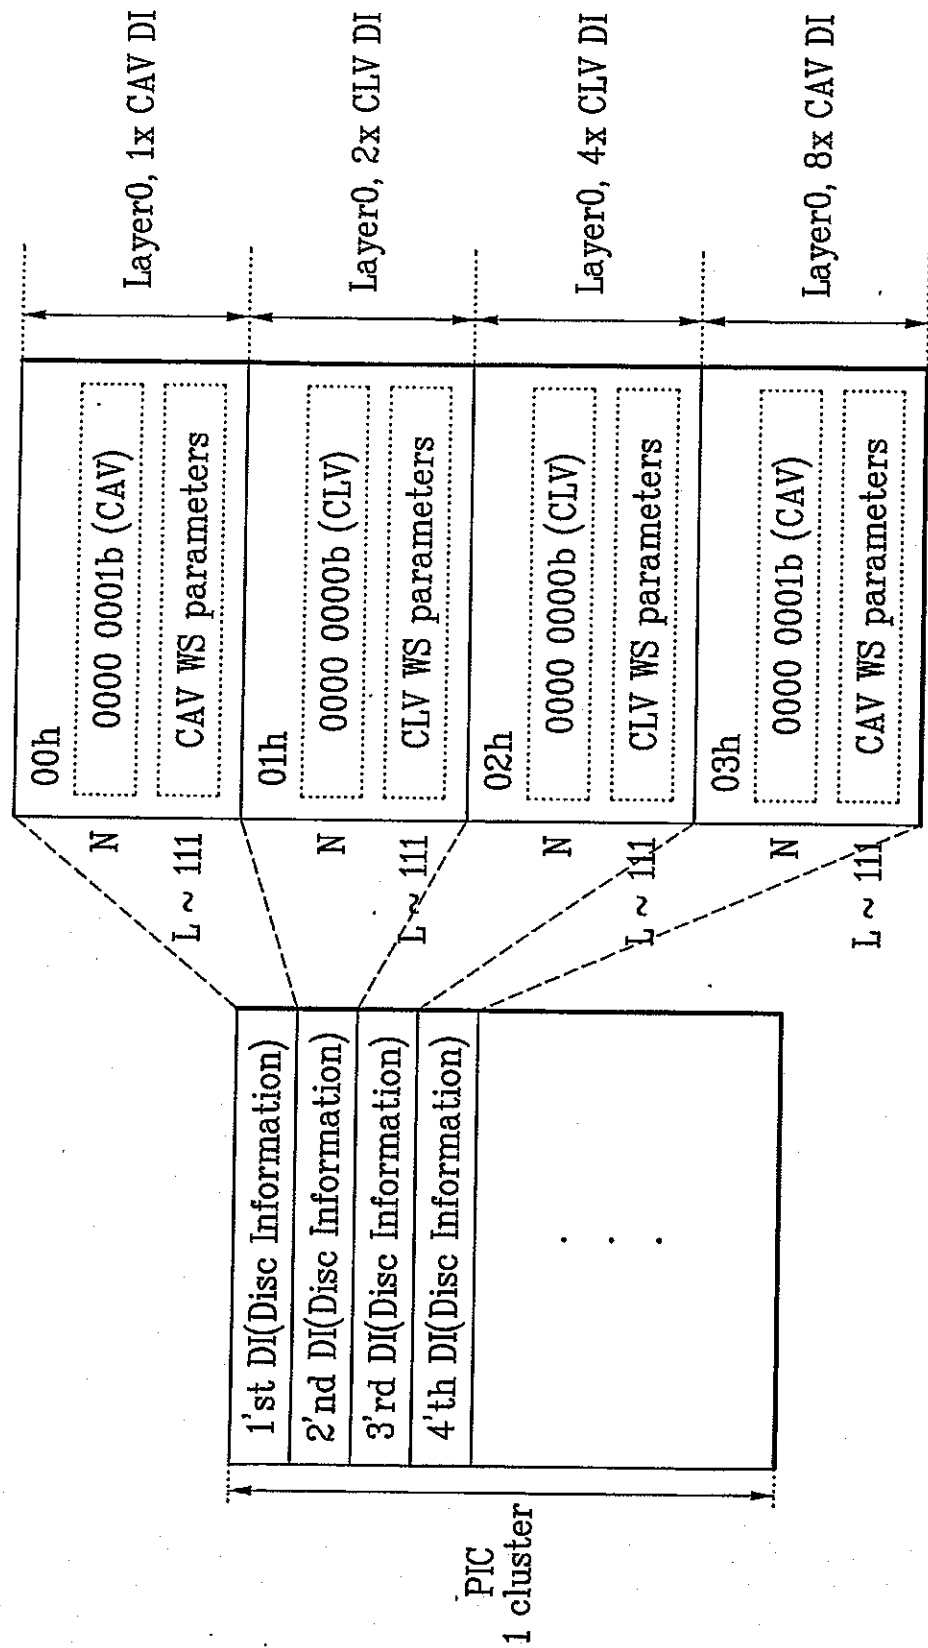

6/12

FIG. 6



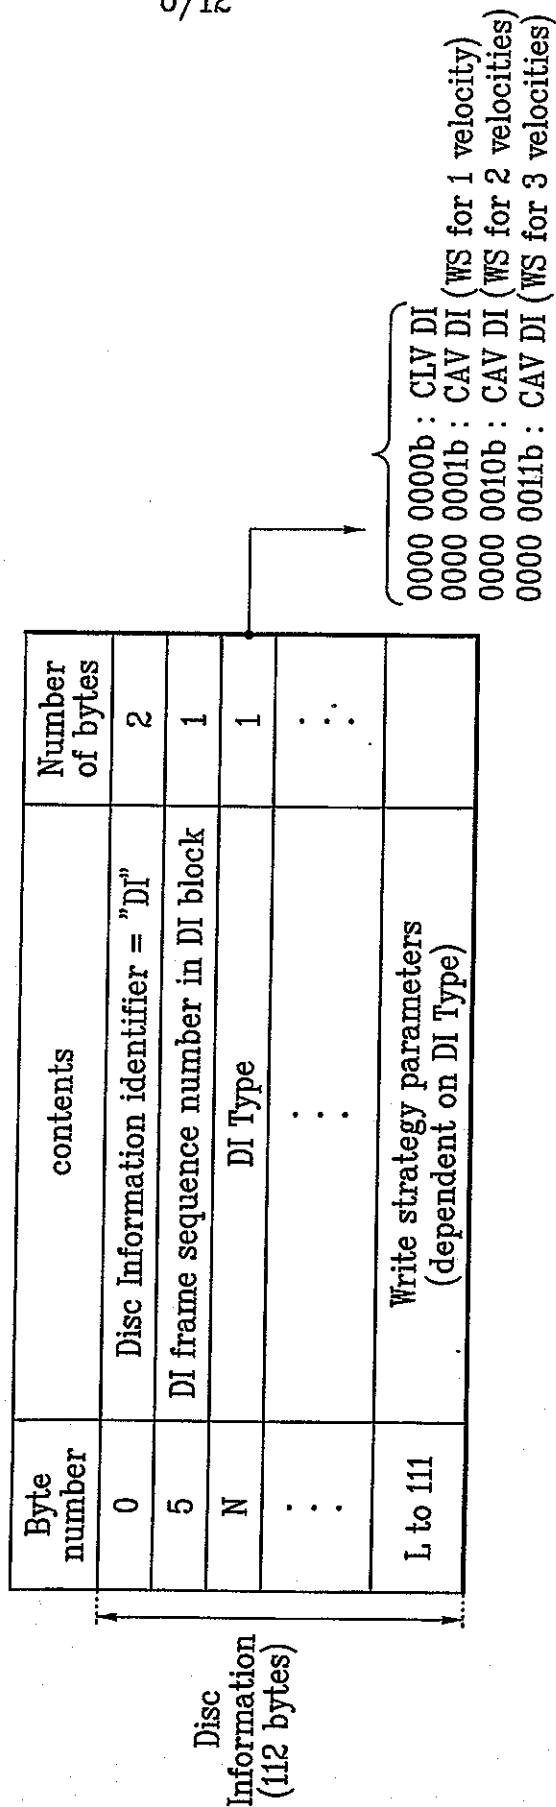


FIG. 7

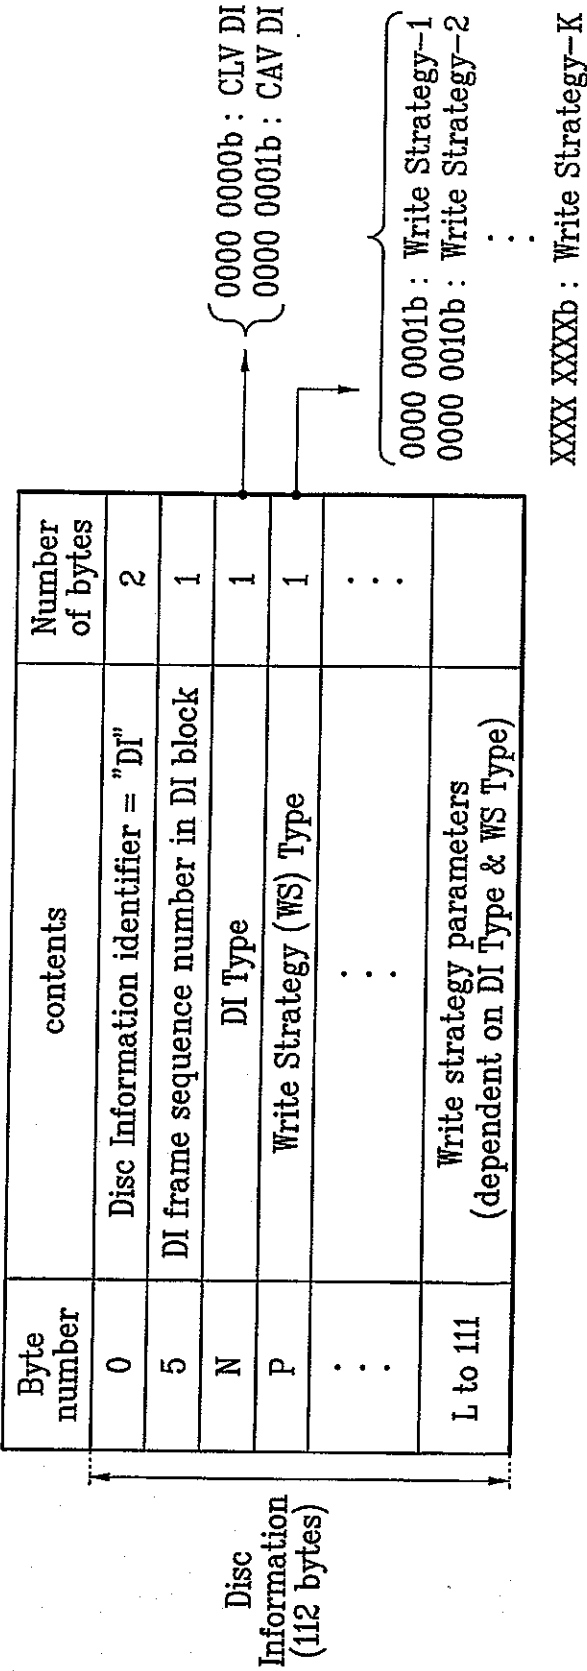

8/12

FIG. 8

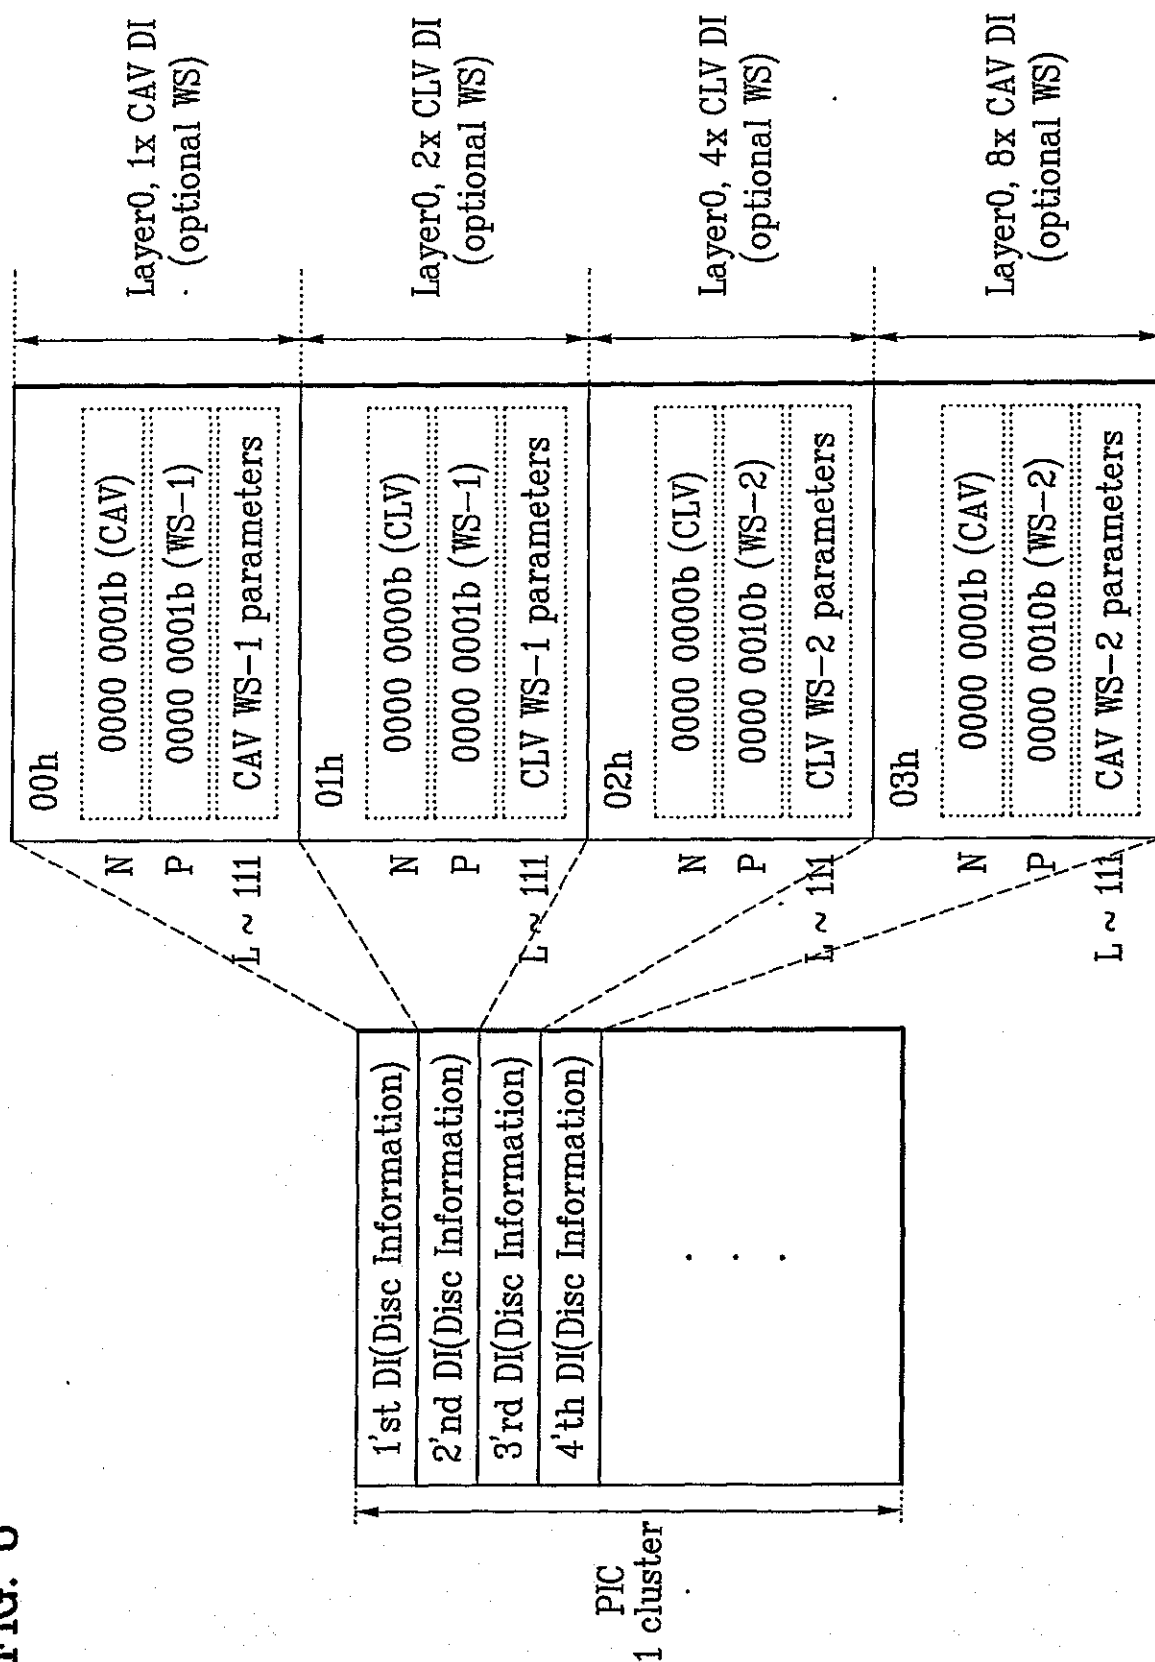

9/12


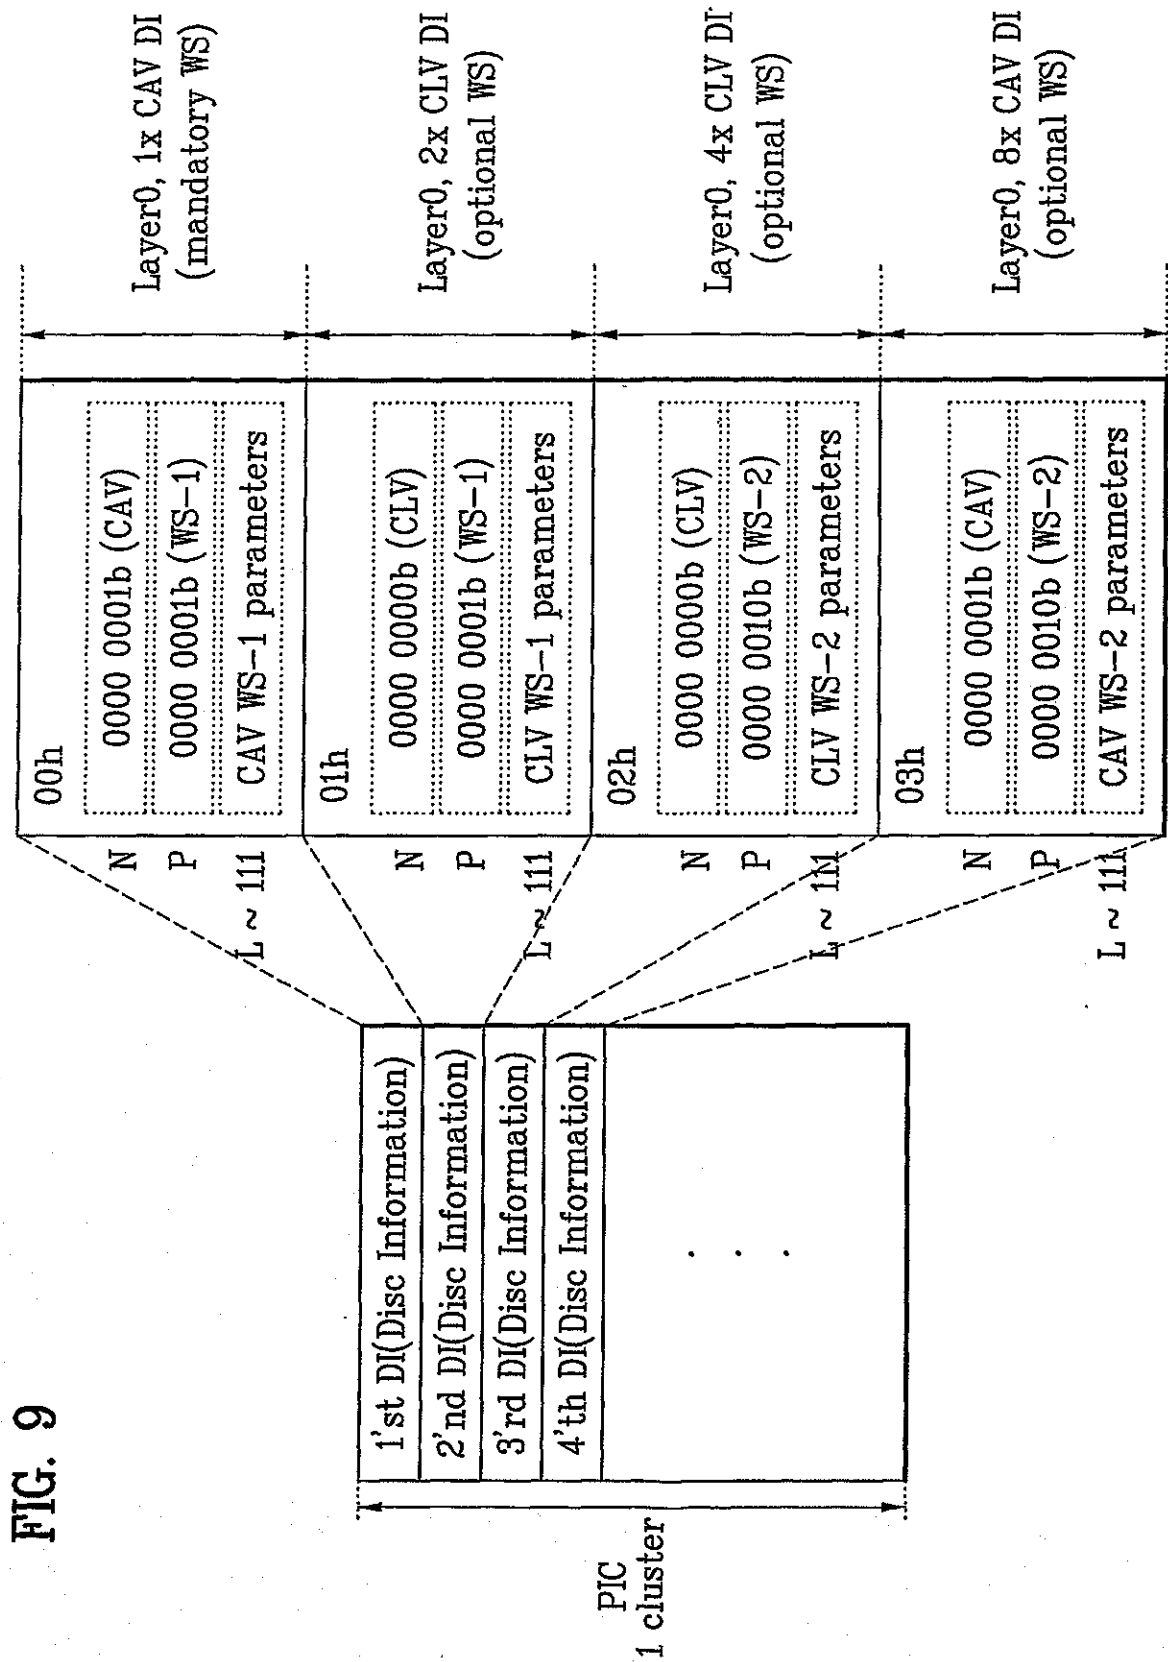


FIG. 10

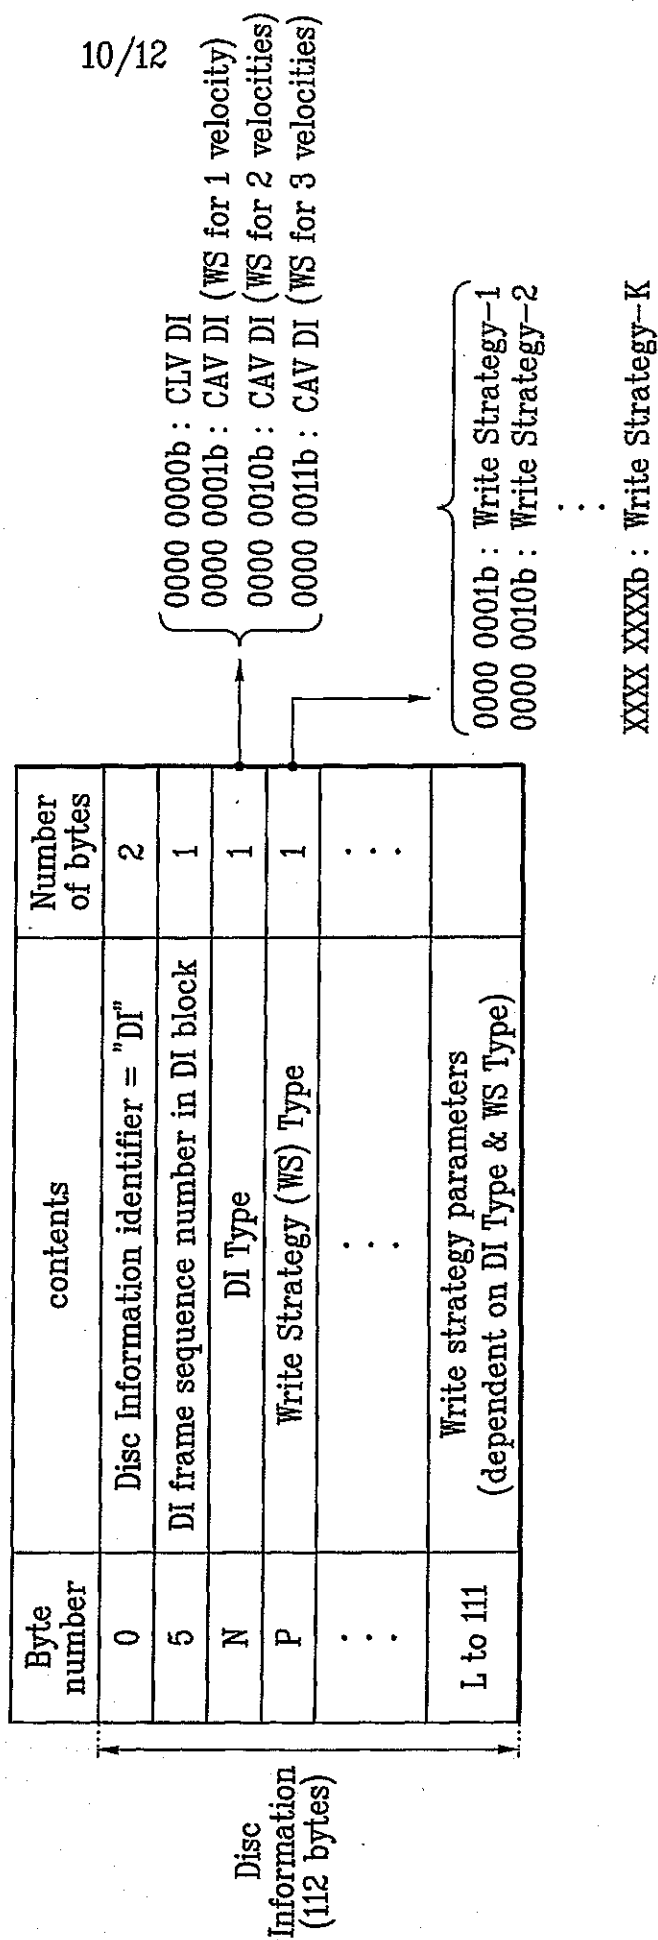

11/12

FIG. 11

Byte number	contents	Number of bytes
0	Disc Information identifier = "DI"	2
5	DI frame sequence number in DI block	1
N	DI Type =CLV (0000 0000b)	1
P	Write Strategy (WS) Type =WS-1 (0000 0001b)	1
⋮	⋮	⋮
L to 111	Maximum dc read power	
	Maximum HF modulated read power	
	Write power settings at Recording Velocity	
	Tmp write pulse duration	
	Ttop first write pulse duration	
	dTtop first write pulse start time at Recording Velocity	
	Te erase multi-pulse duration	
	dTe first erase pulse start time at Recording Velocity	

00h
(Layer0, 1x DI)

Write Strategy
Parameters
(DI Type = CLV
& WS Type = WS-1)

12/12

FIG. 12

