



(51) International Patent Classification:
B62J 9/00 (2006.01) **G07C 9/00** (2006.01)
E05B 65/52 (2006.01)

(74) Agents: FARAGGIANA, Vittorio et al.; Barzano' & Zarnardo Milano S.p.A., Via Borgonuovo 10, I-20121 Milano (IT).

(21) International Application Number:
PCT/IB2008/003472

(22) International Filing Date:
11 December 2008 (11.12.2008)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
MI2008A000211 11 February 2008 (11.02.2008) IT

(71) Applicant (for all designated States except US): GIVI S.R.L. [IT/IT]; Via S. Quasimodo 45, I-25020 Flero BS (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): VISENZI, Giuseppe [IT/IT]; Viale della Bornata 117, I-25123 Brescia (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI

[Continued on next page]

(54) Title: CASE FOR MOTOR VEHICLES WITH FACILITATED OPENING DEVICE

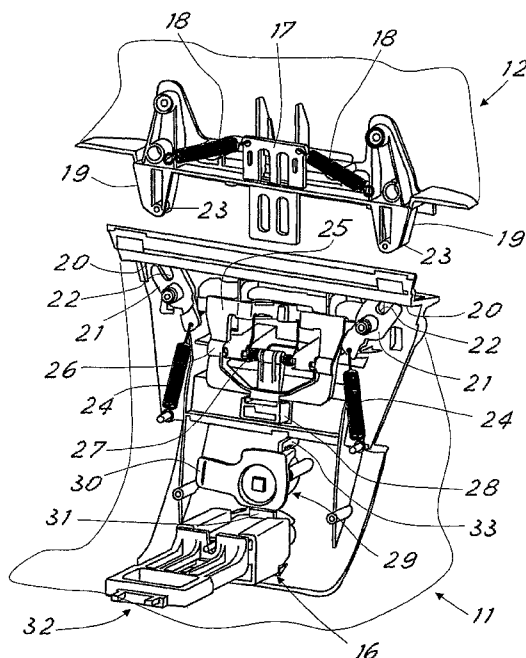


Fig.3

(57) Abstract: A case for motor vehicles is equipped with means for removably-fastening to a support plate (13) on the motor vehicle and comprises a base part (11) and a cover (12) hinged together and equipped with a locking mechanism for holding the cover in position and that preferably also comprises a lock (15) able to be controlled to prevent a control to open the cover. The locking mechanism comprises means for partially shifting the cover from the base part that act positively on the closed cover when the locking mechanism passes from the holding position to the release position.

(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, **Published:**
NE, SN, TD, TG).

— *with international search report (Art. 21(3))*