

(51) International Patent Classification:
H04L 29/08 (2006.01)(21) International Application Number:
PCT/EP2012/076937(22) International Filing Date:
27 December 2012 (27.12.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11306803.5 29 December 2011 (29.12.2011) EP
13/418,819 13 March 2012 (13.03.2012) US

(71) Applicant: AMADEUS [FR/FR]; 485, route du Pin Montard, Sophia Antipolis, F-06410 Biot (FR).

(72) Inventors: DE SCHACHT, Paul; 178, Impasse du Moulin, F-83440 Montauroux (FR). PARE, Thomas; 2 Allée du Panorama, F-06130 Grasse (FR). PASCAL, Matthieu; Résidence les 3 Rivières, 410, avenue Janvier Passero, Bâtiment C9, F-06210 Mandelieu (FR).

(74) Agent: HAUTIER, Nicolas; Cabinet Hautier, 20, rue De La Liberté, F-06000 Nice (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A SYSTEM FOR HIGH RELIABILITY AND HIGH PERFORMANCE APPLICATION MESSAGE DELIVERY

FIGURE 2

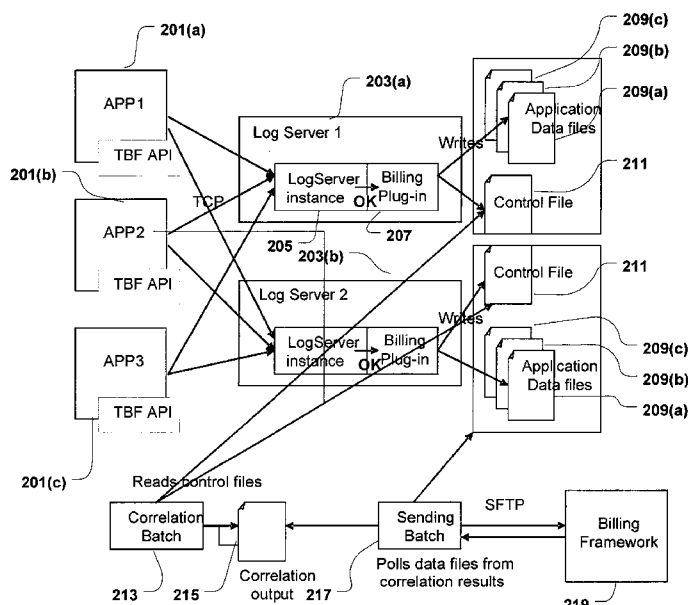

(57) Abstract: The invention provides a computer-implemented method and a system of providing high reliability and high performance application message delivery, characterized in that it comprises the following steps performed with at least one data processor: at a plurality of log servers (203 a - b) coupled to at least an application server (201 a - c): receiving asynchronously, from the at least one application server (201 a - c), application messages containing application information; receiving asynchronously, from the at least one application server (201 a - c), control messages at a predetermined interval; at each of the plurality of log servers (203 a - b): storing the received application messages in a current application data file (209) and the received control messages in a control file (211); and upon receiving an open-close control message, closing the current application data file, storing said closed application data file and creating a new application data file as the current application data file; comparing the control files of the plurality of log servers (203 a - b) for a given interval; and based on this comparison, determining from among a plurality of application data files (209) from each of the log servers (203 a - b), an application data file as a best-candidate for a given interval and forwarding the best-candidate file for post-processing.