

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69018 A1

- (51) International Patent Classification⁷: E05B 9/08, 17/20, 13/00, 15/10, 63/00
- (21) International Application Number: PCT/GB01/00746
- (22) International Filing Date: 22 February 2001 (22.02.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0005756.2 11 March 2000 (11.03.2000) GB
- (71) Applicant (for all designated States except US): BANHAM PATENT LOCKS LIMITED [GB/GB]; 233-235 Kensington High Street, London W8 6SF (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): COWPER, Brian, Edward [GB/GB]; 114 Elm Road, New Malden, Surrey KT3 3HP (GB).
- (74) Agents: MOSEY, Stephen, George et al.; Marks & Clerk, Alpha Tower, Suffolk Street Queensway, Birmingham B1 1TT (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOCK

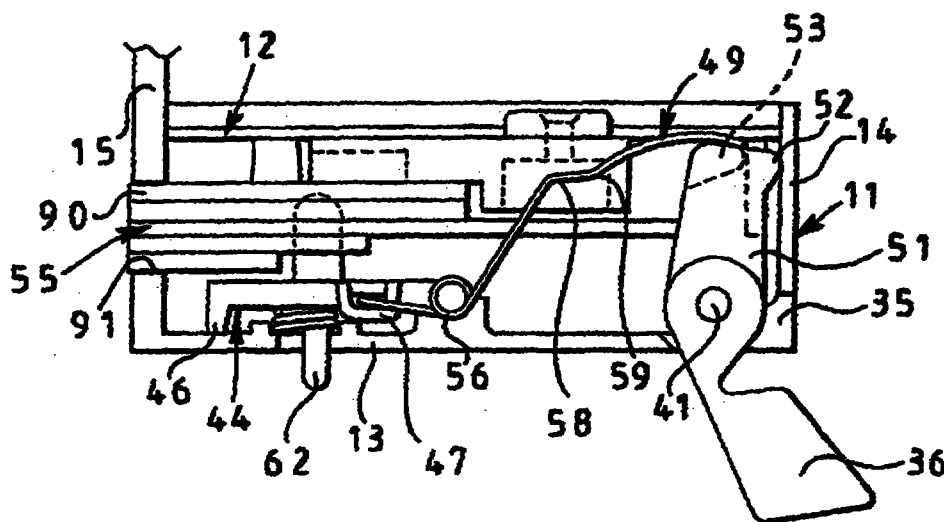

(57) Abstract: A lock for a door (10) comprises a casing (11), a bolt (55), a pivoted operation handle (36), operable to retract the bolt, a locking member to deadlock the bolt against retraction, and a unitary spring steel connecting member (49) between the handle and the locking member. The connecting member has a central coil (56) around a rod (43) which acts as a pivot for the locking member and one end (57) of the connecting member is cranked to engage in a recess (48) of the locking member. The other end of the connecting member is shaped such that when engaged by the handle, as the handle is pivoted to retract the bolt, it transmits a force to said end (57) at the locking member to overcome the force of a spring (65) holding the locking member against the bolt, thereby to release the deadlocking and allow bolt retraction.