

(19) World Intellectual Property Organization  
International Bureau



\*G00002\*

(43) International Publication Date  
17 January 2002 (17.01.2002)

PCT

(10) International Publication Number  
**WO 02/04965 A3**

- (51) International Patent Classification<sup>7</sup>: **G01R 1/04** (74) Agent: **RODDY, Richard, J.**; Advanced Micro Devices, Inc., One AMD Place, Mail Stop 68, Sunnyvale, CA 94088-3453 (US).
- (21) International Application Number: **PCT/US01/20718**
- (22) International Filing Date: **29 June 2001 (29.06.2001)** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **09/612,414** **7 July 2000 (07.07.2000)** **US** (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: **ADVANCED MICRO DEVICES, INC.** [US/US]; One AMD Place, Mail Stop 68, Sunnyvale, CA 94088-3453 (US).
- (72) Inventors: **HAN BOON, Wong**; Apt. Blk 109, Serangoon North Avenue 1, #12-649, Singapore 550109 (SG). **HIONG, Tan, Seok**; Blk 185, #04-66, Pasir Ris 5711, Singapore 510185 (SG). **KIAT, Aw, Chin**; Blk 35 Chai Chee Avenue, #07-256, Singapore 461035 (SG).
- Published:  
— with international search report


[Continued on next page]

(54) Title: **LOAD BOARD FEEDER**



\*162162\*

200

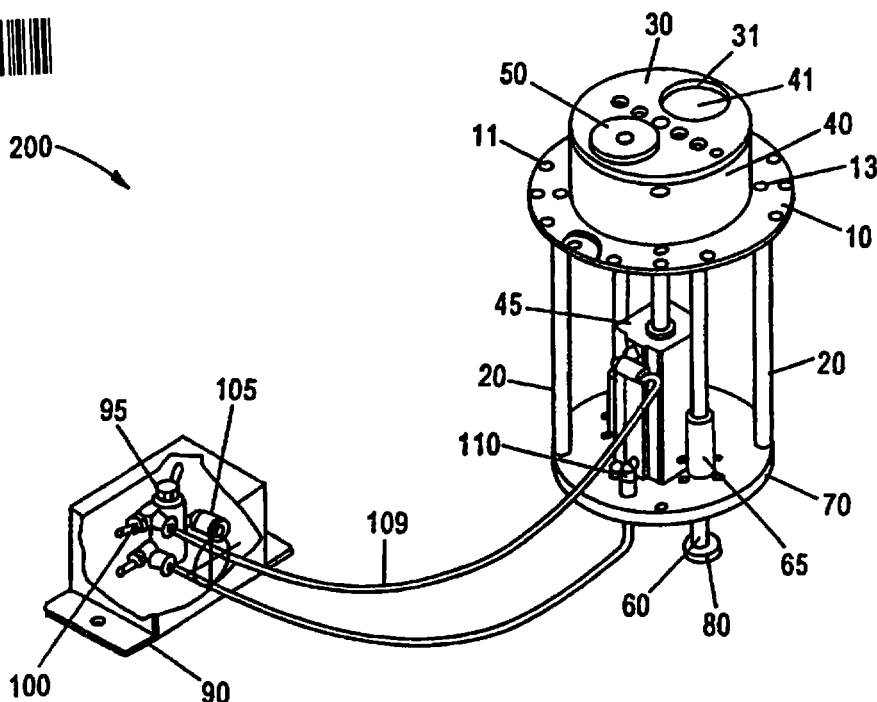

(57) Abstract: A load board feeder (200) is secured to the center portion of a test head (310). The load board feeder (200) uses a lift mechanism (45) to control the movement of a locator block (40) in vertical directions. A load board (325) rests on the locator block (40) and a location device (50) on the locator block (40) ensures alignment of the load board (325) with a test head (310). When the load board feeder (200) lowers the load board (325), the load board (235) is properly seated on the test head (310) without damaging delicate pogo pins (320).

WO 02/04965 A3

A2



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

18 April 2002