




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65D 88/74, 90/06, F25D 17/06	A1	(11) International Publication Number: WO 97/27128 (43) International Publication Date: 31 July 1997 (31.07.97)
(21) International Application Number: PCT/SE97/00089 (22) International Filing Date: 21 January 1997 (21.01.97) (30) Priority Data: 9600240-7 23 January 1996 (23.01.96) SE (71) Applicant (for all designated States except US): FRIGOTAINER AB [SE/SE]; Lagga, Marma, S-741 01 Knivsta (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): LARSSON, Nils [SE/SE]; Sväa Byväg 21, S-755 94 Uppsala (SE). WESTERHOLM, Göran [SE/SE]; Handarbetsvägen 96, S-757 57 Uppsala (SE). (74) Agents: BJELLMAN, Lennart et al.; Dr. Ludwig Brann Patentbyrå AB, Drottninggatan 7, P.O. Box 1344, S-751 43 Uppsala (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. With amended claims. In English translation (filed in Swedish).

(54) Title: FREEZING CONTAINER ARRANGEMENT

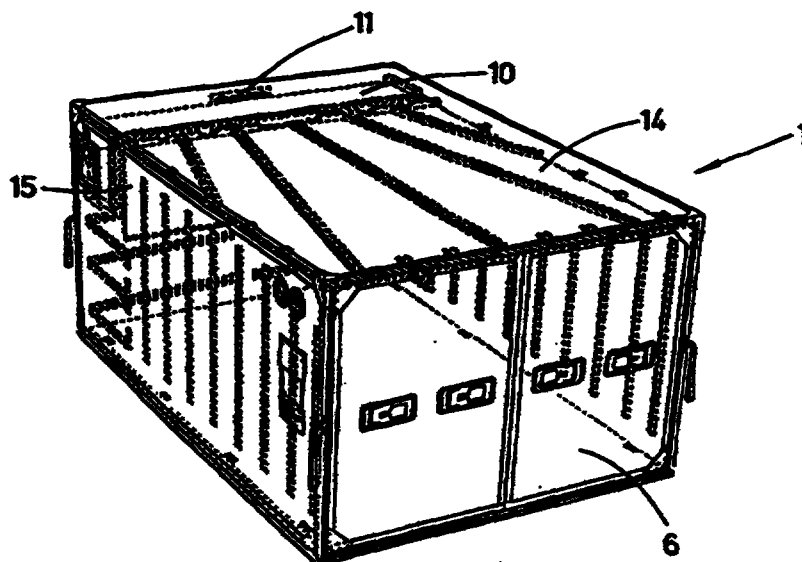

(57) Abstract

A refrigerated freight container (1) comprises a heat insulated, substantially parallelepipedal case with a ceiling (2), two side walls and two end walls (5, 6), and a bottom (7). A refrigerating unit with an ice bin (10) is positioned in the corner between one of the end walls (5) and the ceiling (2). Around the ice bin (10) are flow channels (12) for refrigerating air disposed, whereby the flow of the refrigerating air is achieved by means of fans. An inner ceiling (14) is disposed against the container ceiling (2) with a spacing therebetween and this spacing constitutes a flow path for the refrigerating air from the refrigerating unit. The inner ceiling (14) ends at a distance from the inside of the side walls and that end wall (6), which is opposite to the one where the refrigerating unit is positioned.