



(51) International Patent Classification:

F16K 11/20 (2006.01) *F16K 27/06* (2006.01)
F16K 5/06 (2006.01) *F16L 41/02* (2006.01)
F16K 5/20 (2006.01)

(21) International Application Number:

PCT/US2023/033140

(22) International Filing Date:

19 September 2023 (19.09.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/407,830 19 September 2022 (19.09.2022) US

(71) Applicant: **MOGAS INDUSTRIES, INC.** [US/US];
14330 E. Hardy, Houston, Texas 77039 (US).

(72) Inventors: **OSUNA, Jose**; 804 W Drew St., Houston,
Texas 77006 (US). **OLIVER, Shane**; 8100 Cypresswood
Dr. #1131, Spring, Texas 77379 (US). **MARTINEZ, Paola**;
3831 Raintree Village Dr, Katy, Texas 77449 (US).
LAKHANI, Samir; 5631 Capella Park Drive, Spring,
Texas 77379 (US). **DAVID, Anton**; 21307 Hawkley Dr.,
Richmond, Texas 77406 (US).

(74) Agent: **LUNDEEN, Daniel N**; 710 Harrison Avenue,
Leadville, Colorado 80461 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: Y-PATTERN VALVE ASSEMBLY AND METHOD

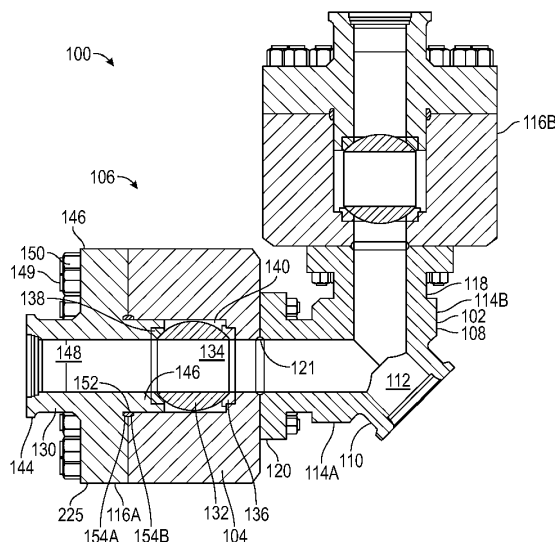


FIG. 2

(57) Abstract: Y-block has a relatively enlarged main body, a main leg and Y legs with Y-end flanges removably mated directly to bodies of ball valves having flow control elements, a fixed seat, a spring-driven seat, and a first end closure-connect with a seat recess receiving one of the seats. The other seat is received in a seat recess in the valve body, or a second end closure-connect. The Y legs have central portions between the Y-end flanges and the main body having a smaller outside diameter relative to lateral dimension of the main body.

Published:

— with international search report (Art. 21(3))