

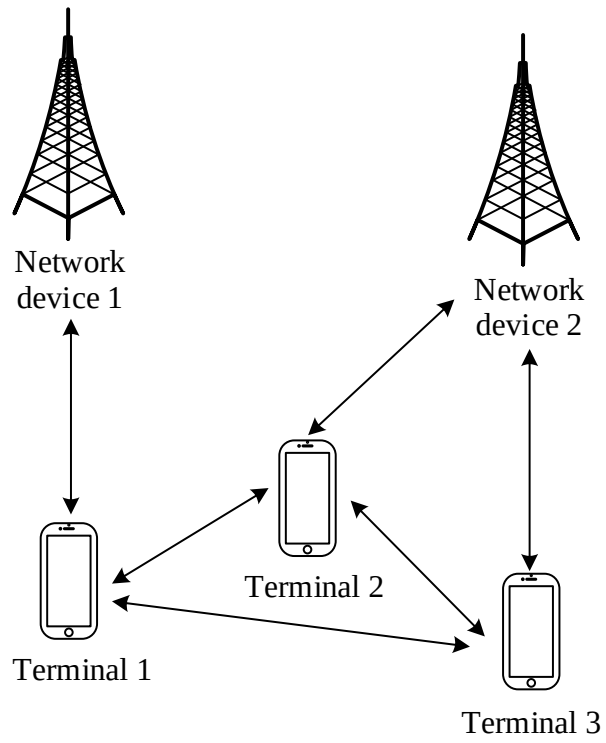


FIG. 1

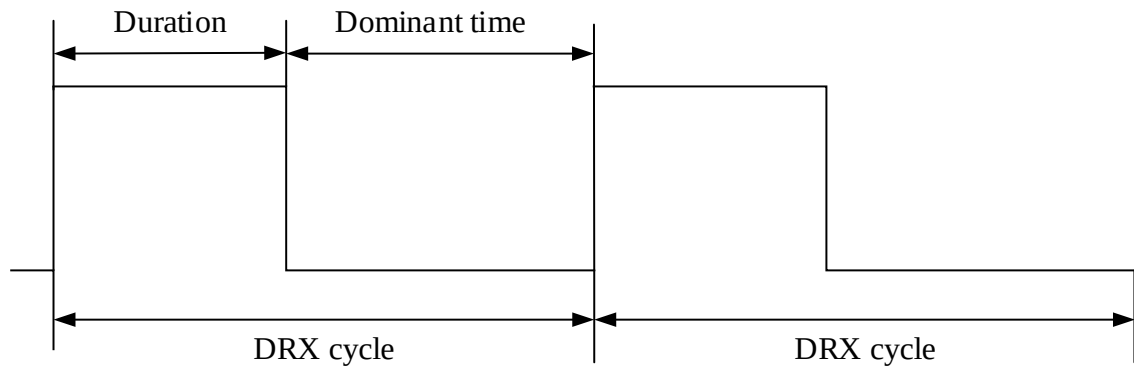


FIG. 2

A terminal device does not send first CSI at first time if a preset condition is met 310

FIG. 3

A network device does not receive first CSI at first time if a preset condition is met

410

FIG. 4

If a terminal device is switched to a third BWP, and a configuration message of the third BWP does not include configuration information of a CFR, the terminal device stops a timer corresponding to a multicast DRX

510

FIG. 5

If a terminal device is switched to a third BWP, and a configuration message of the third BWP does not include configuration information of a CFR, a network device stops a timer corresponding to a multicast DRX

610

FIG. 6

If a configuration message of a fourth BWP includes information about a CFR, and a multicast DRX is configured for a terminal device, the terminal device runs the multicast DRX

710

FIG. 7

If a configuration message of a fourth BWP includes configuration information of a CFR, and a multicast DRX is configured for a terminal device, a network device runs the multicast DRX

810

FIG. 8

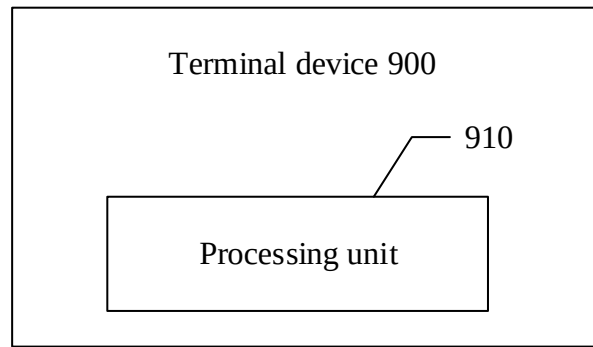


FIG. 9

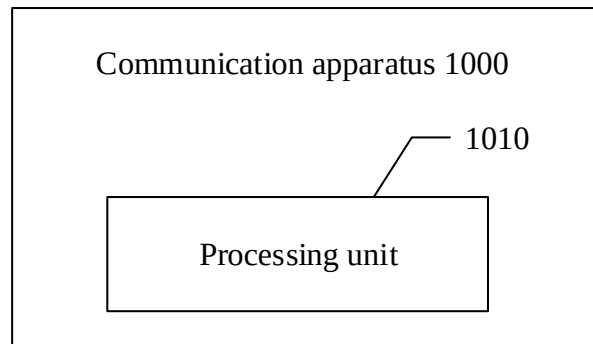


FIG. 10

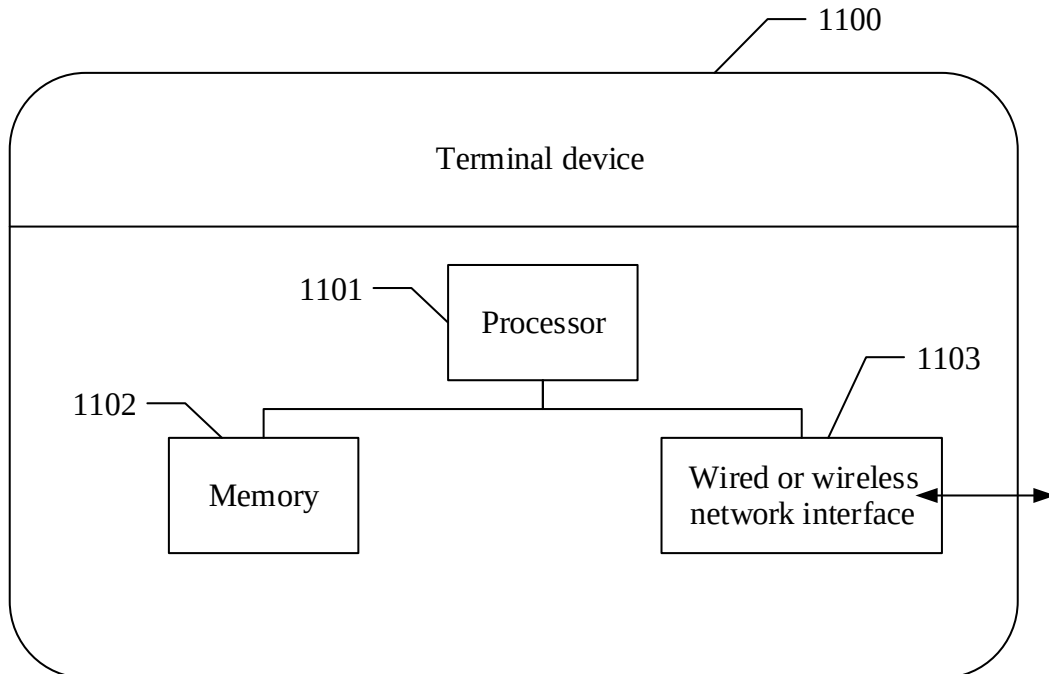


FIG. 11

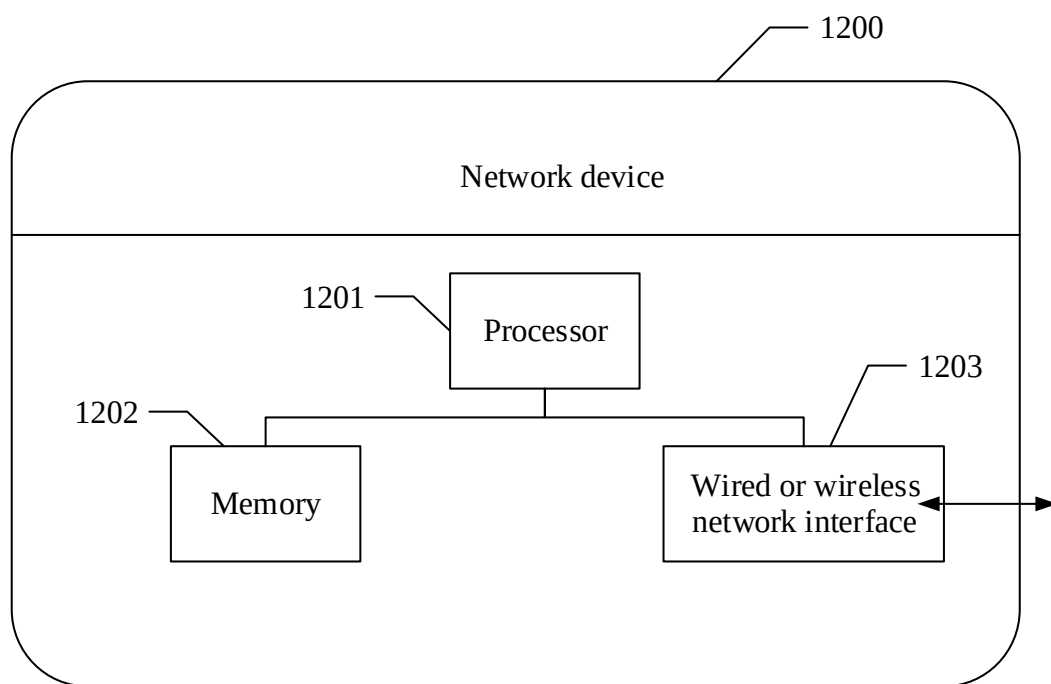


FIG. 12