




[도1]

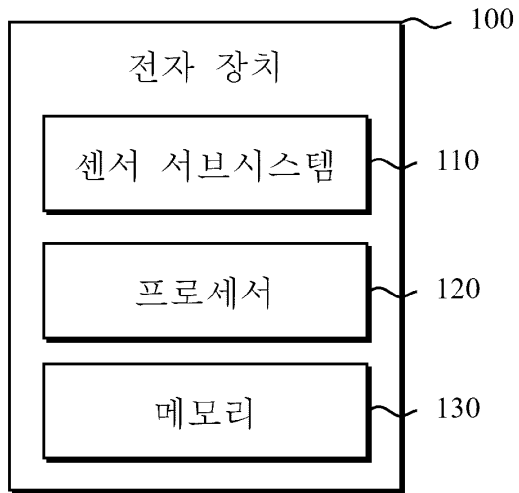


[도2]

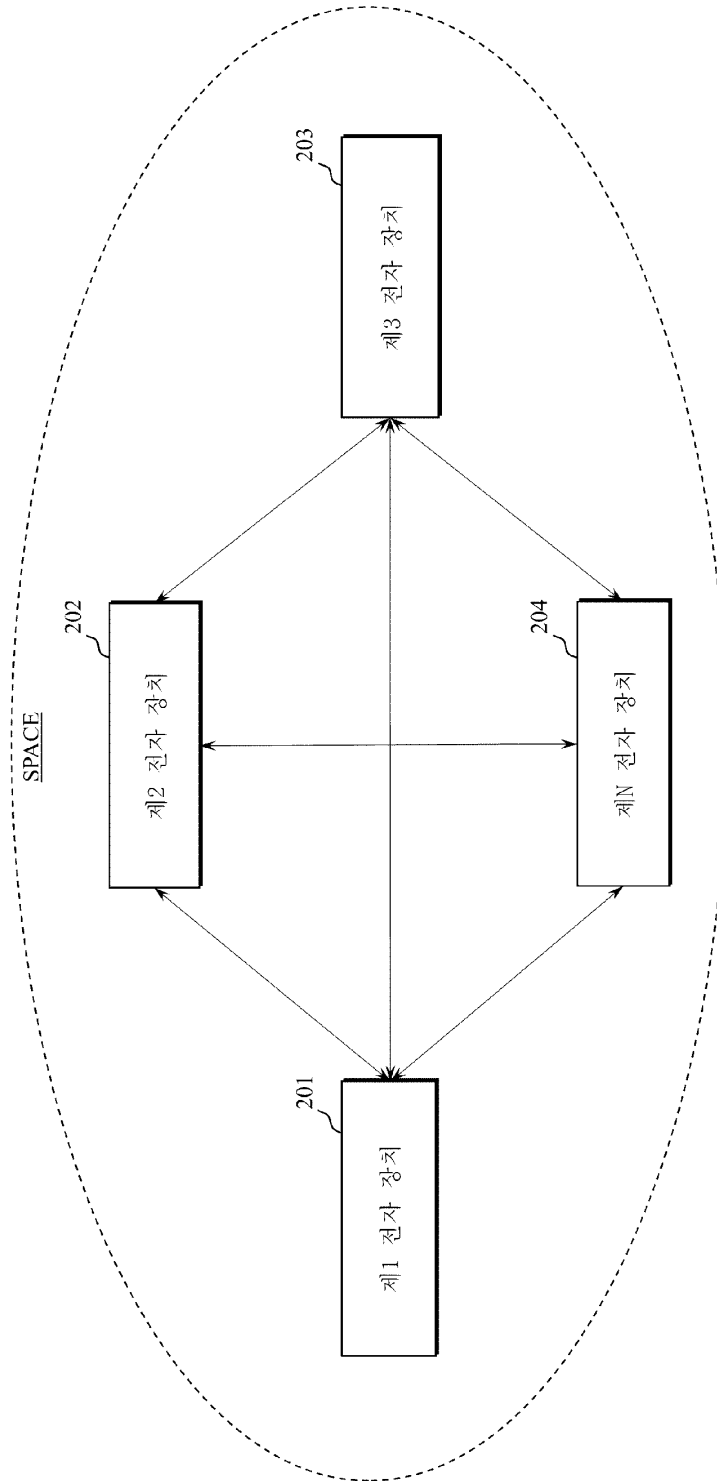


[도3]

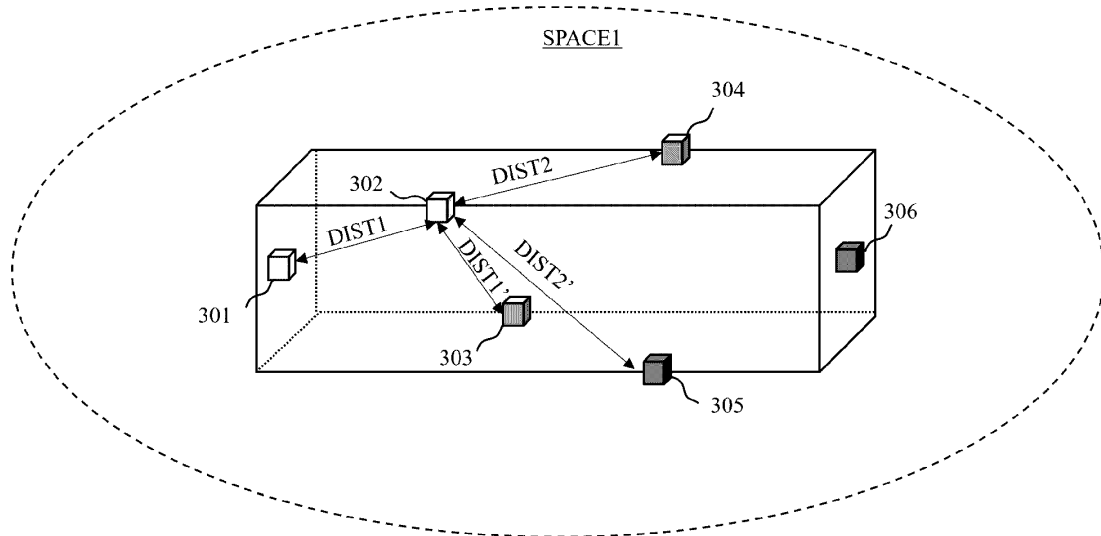

[도4]

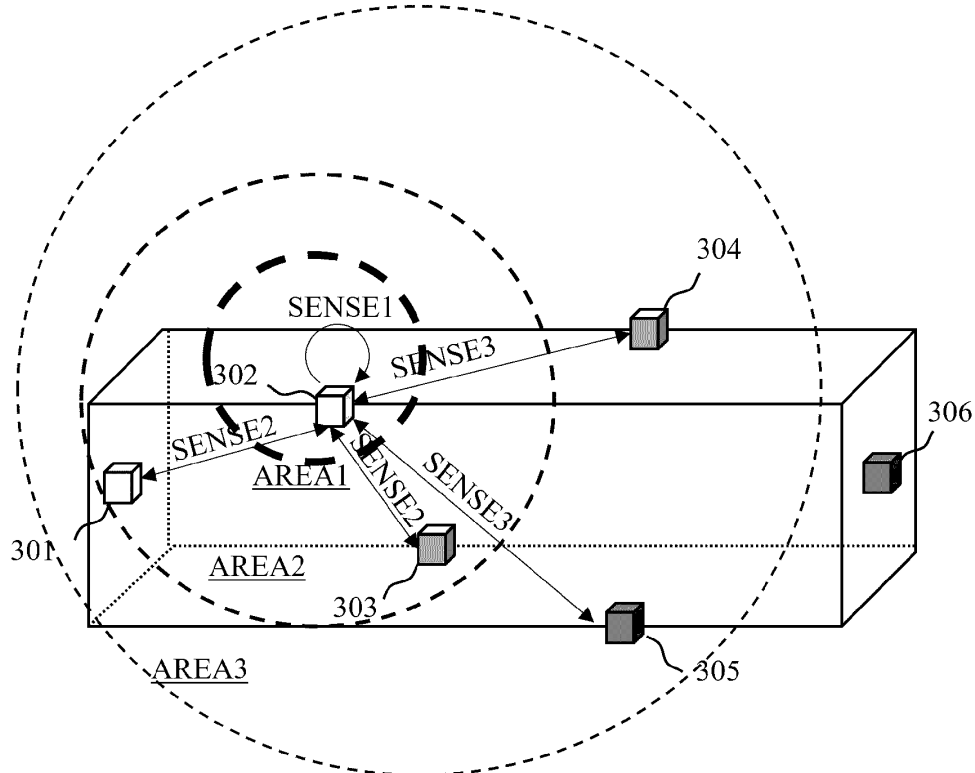

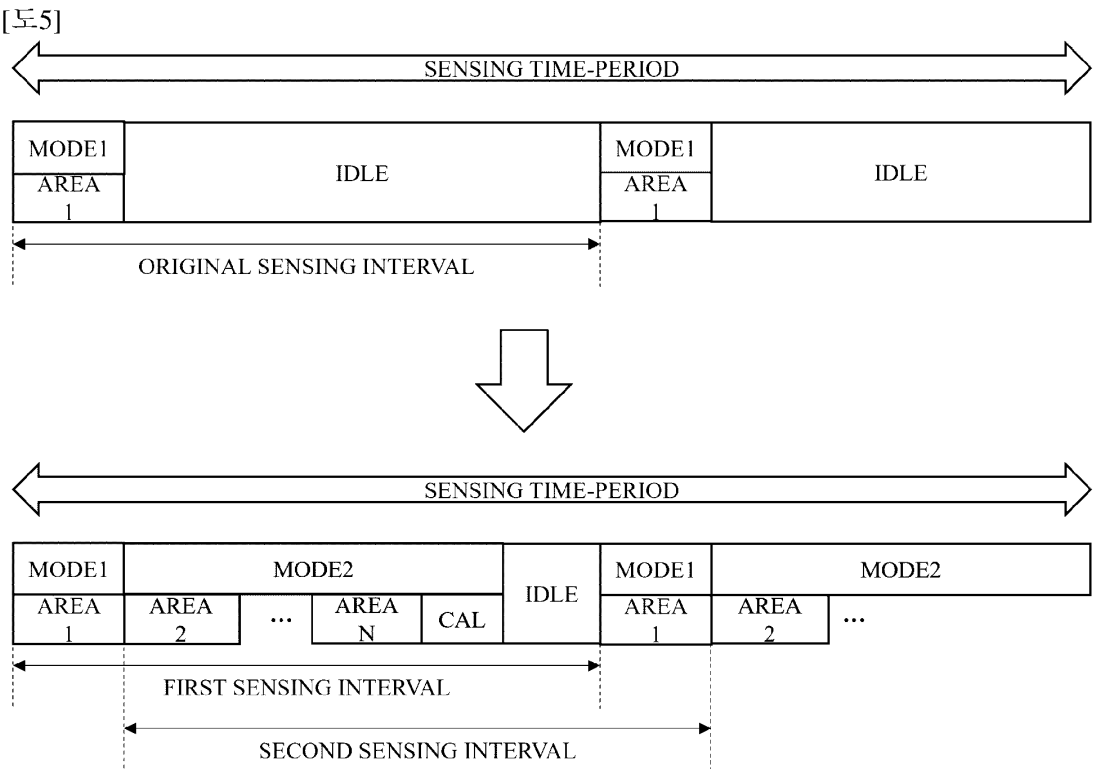


[도6]

PACKET1


HEADER			BODY		
START	PARITY	SYNC	MODE 1 (SENSING DATA)	MODE 2 (SENSING DATA)	PERI (CAL/COMP)

[도7]

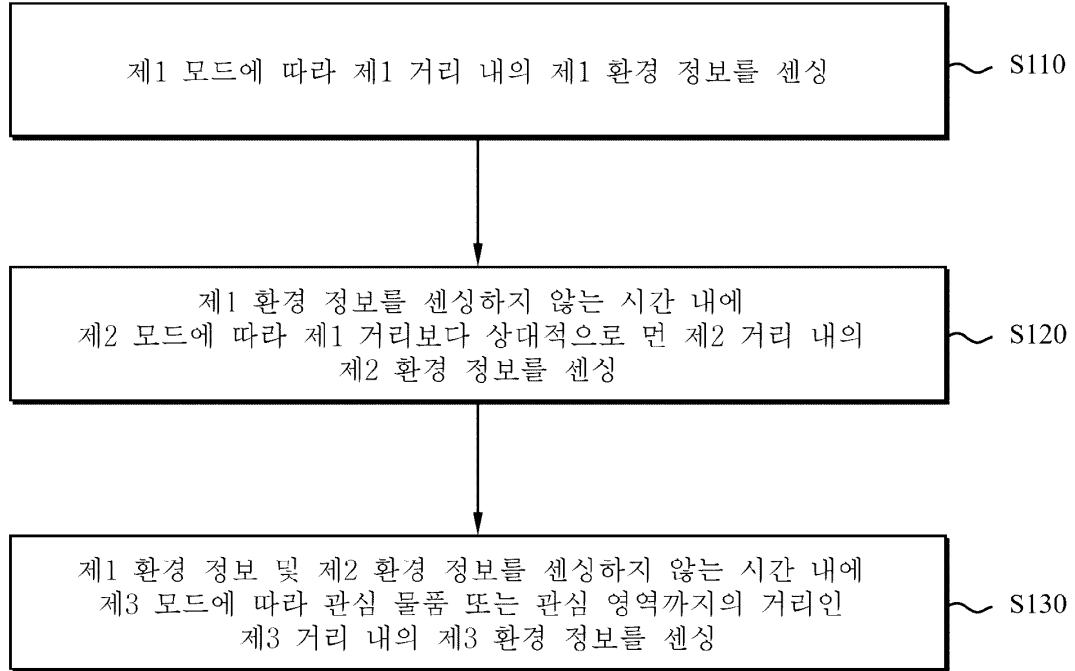

[도8]


SPACE2

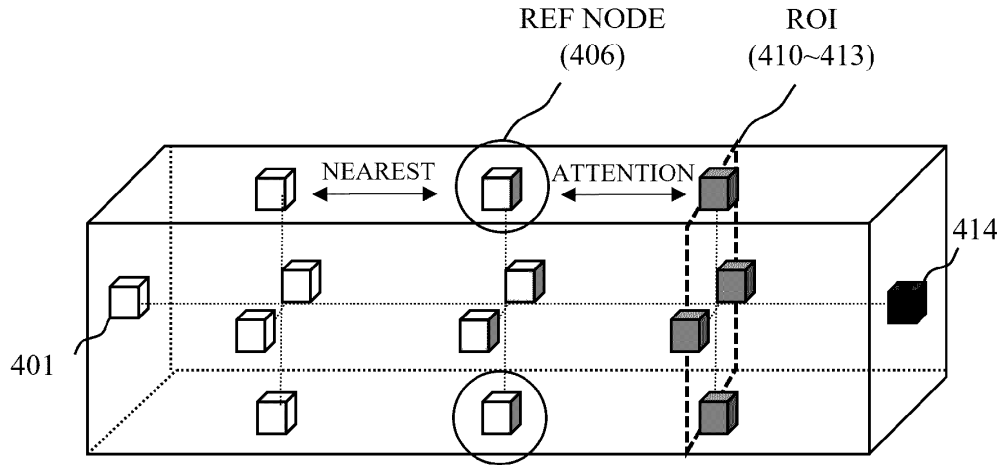


[도9]

	전도		대류	관류
	$q_k = -\frac{kA\Delta T}{\Delta x}$	$q_k = -CA\Delta T$		
열전달열량 (열류율)			$q_h = -hA\Delta T$	$Q = q_k + q_h$
열전달률	$k = -\frac{q\Delta x}{A\Delta T}$		$h = -\frac{q\Delta x}{A\Delta T}$	$K = \frac{1}{R_T}$
열전달저항	$R_k = \frac{\Delta x}{k}$		$R_h = \frac{1}{h}$	$R_T = \frac{1}{K}$
열컨덕턴스	$C = \frac{1}{R_k} = \frac{k}{\Delta x}$		-	-


[도10]

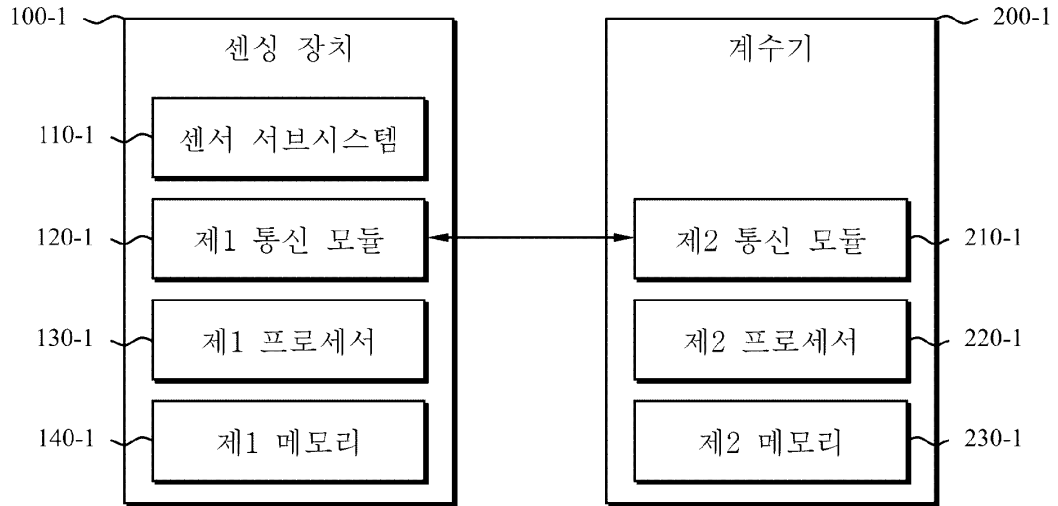10-1


[도11]

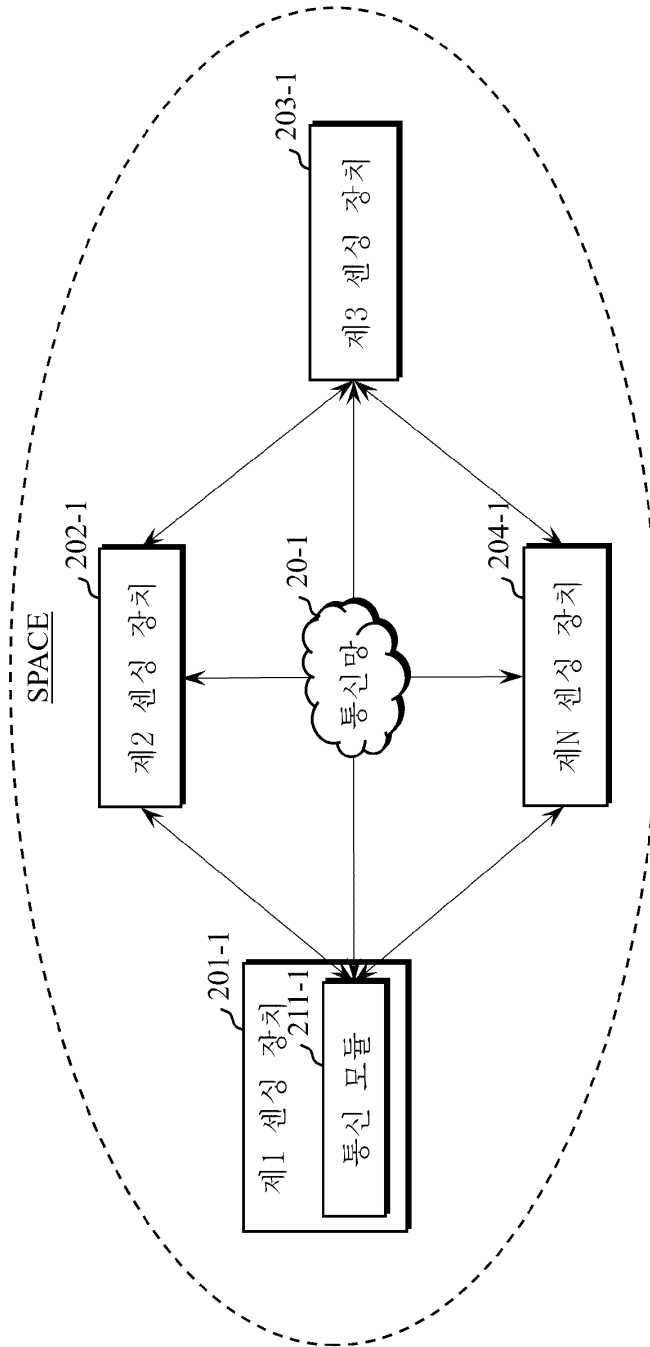



[도12]

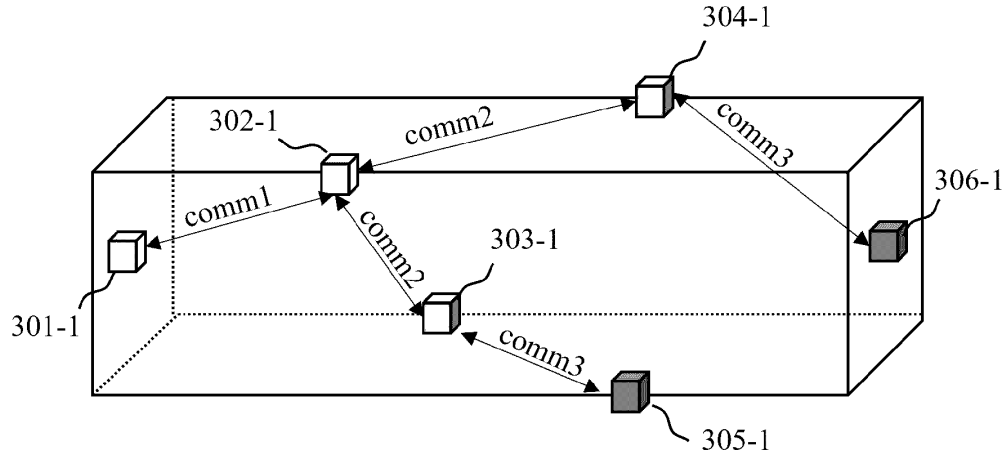SPACE1


[도13]

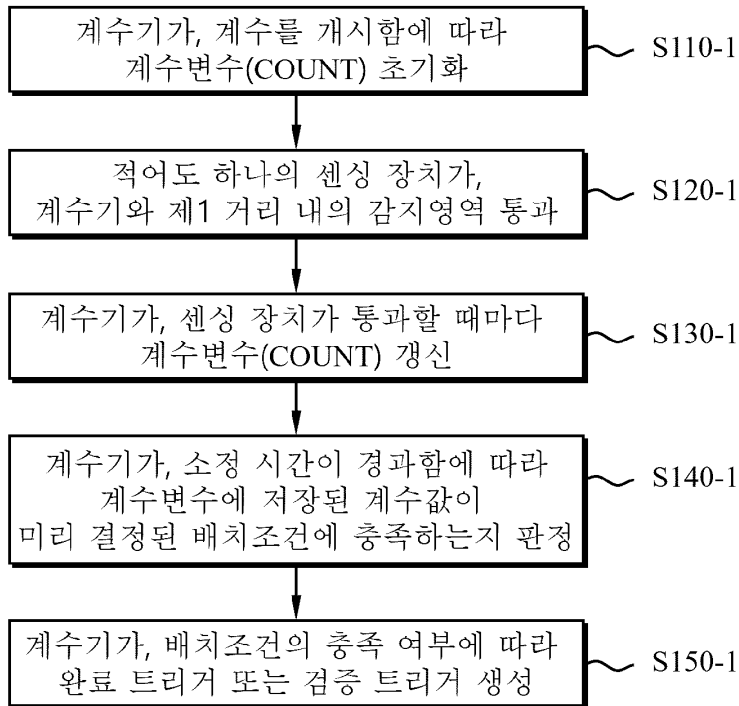


[도 14]

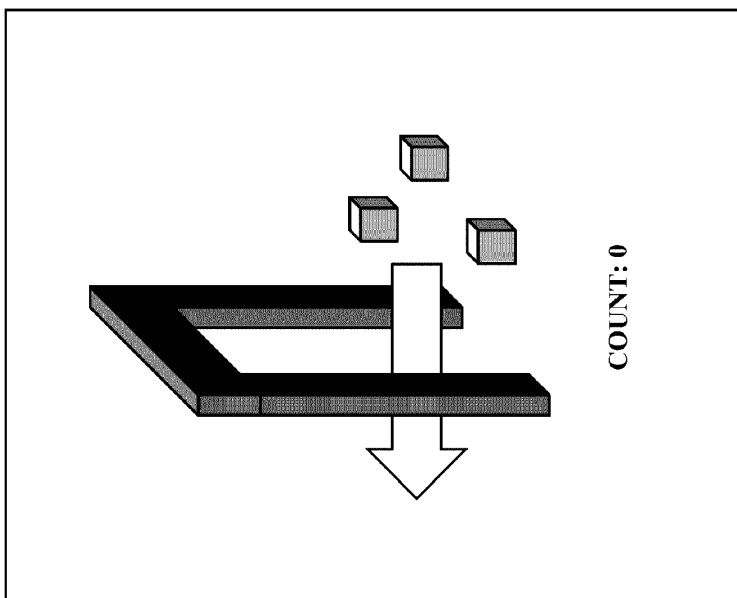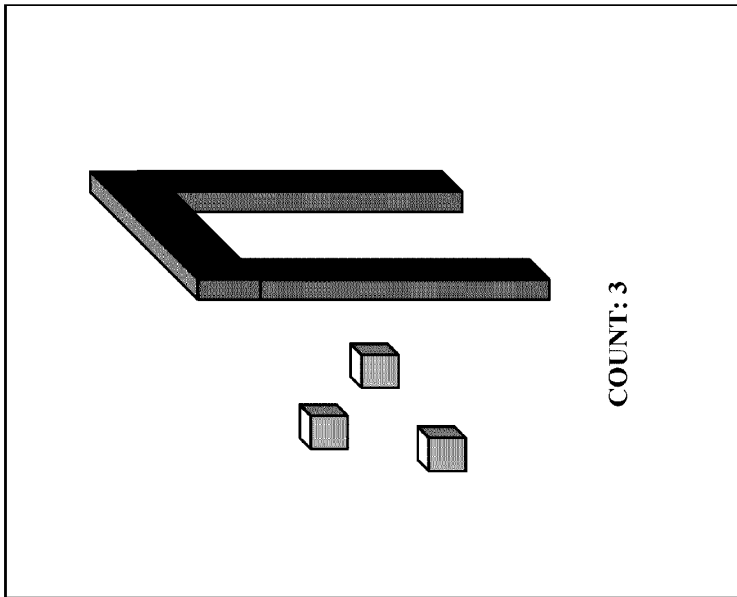



[도15a]

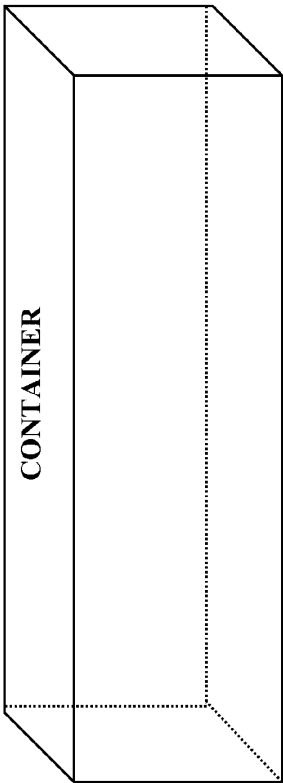


COUNT=0




[도15b]

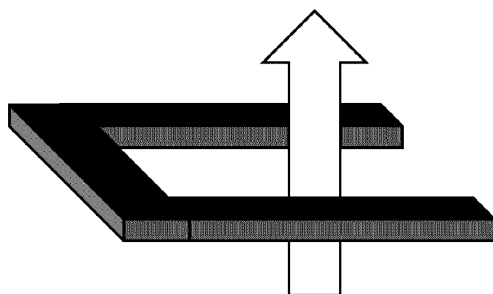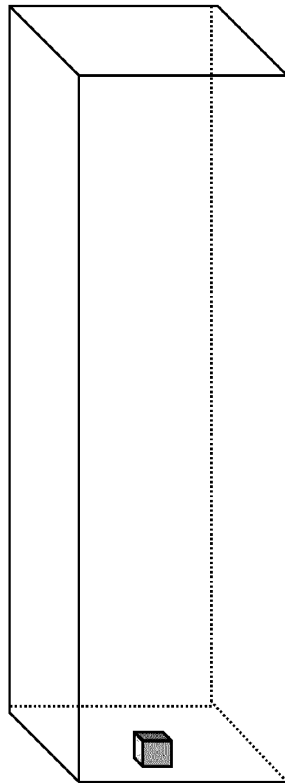


COUNT=1




[도15d]

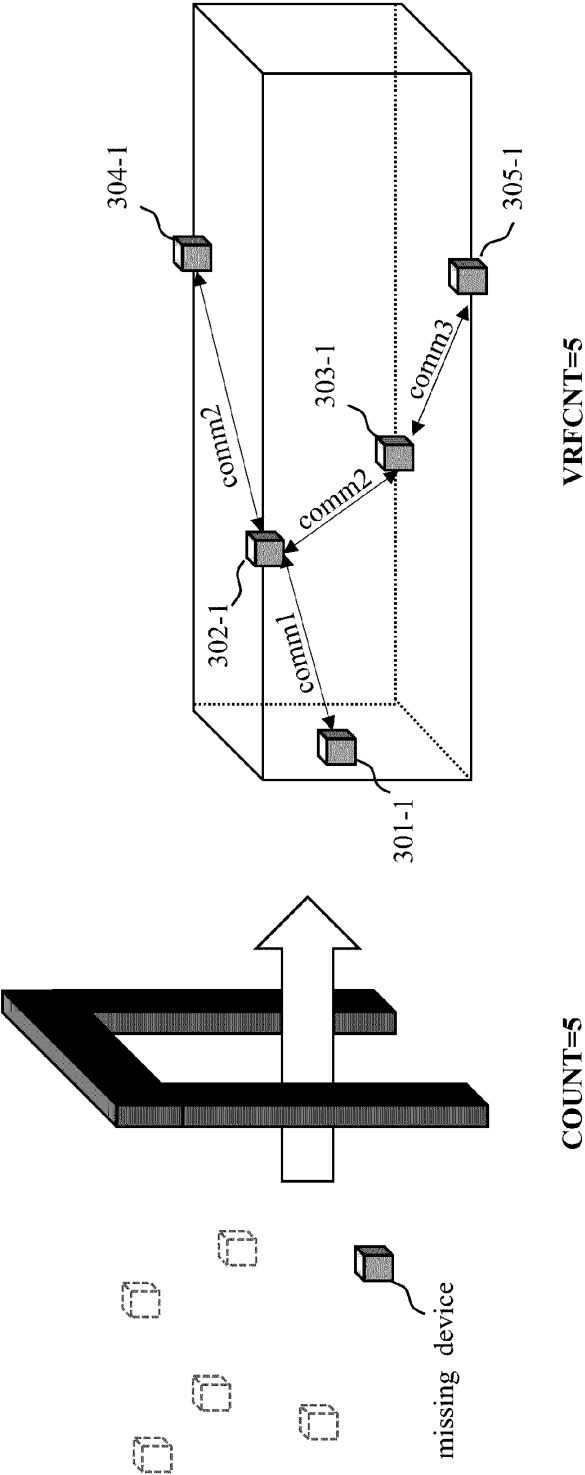



[도16]

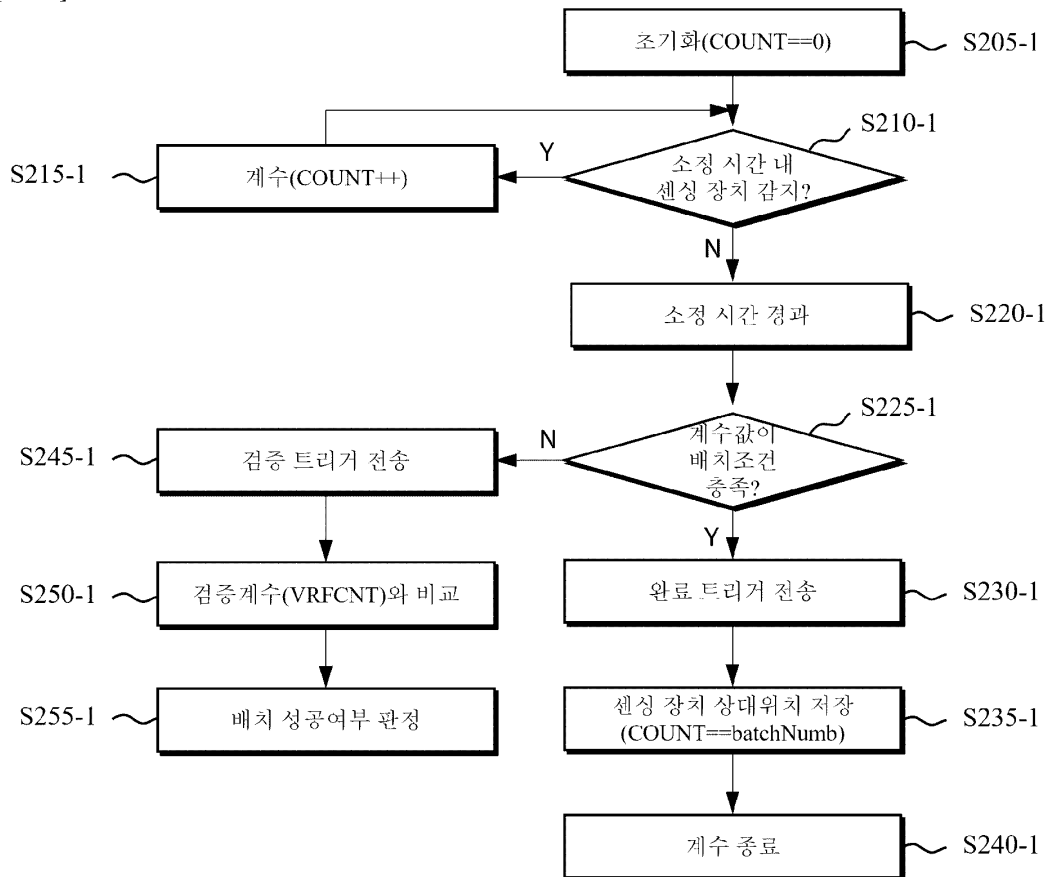


[도17a]

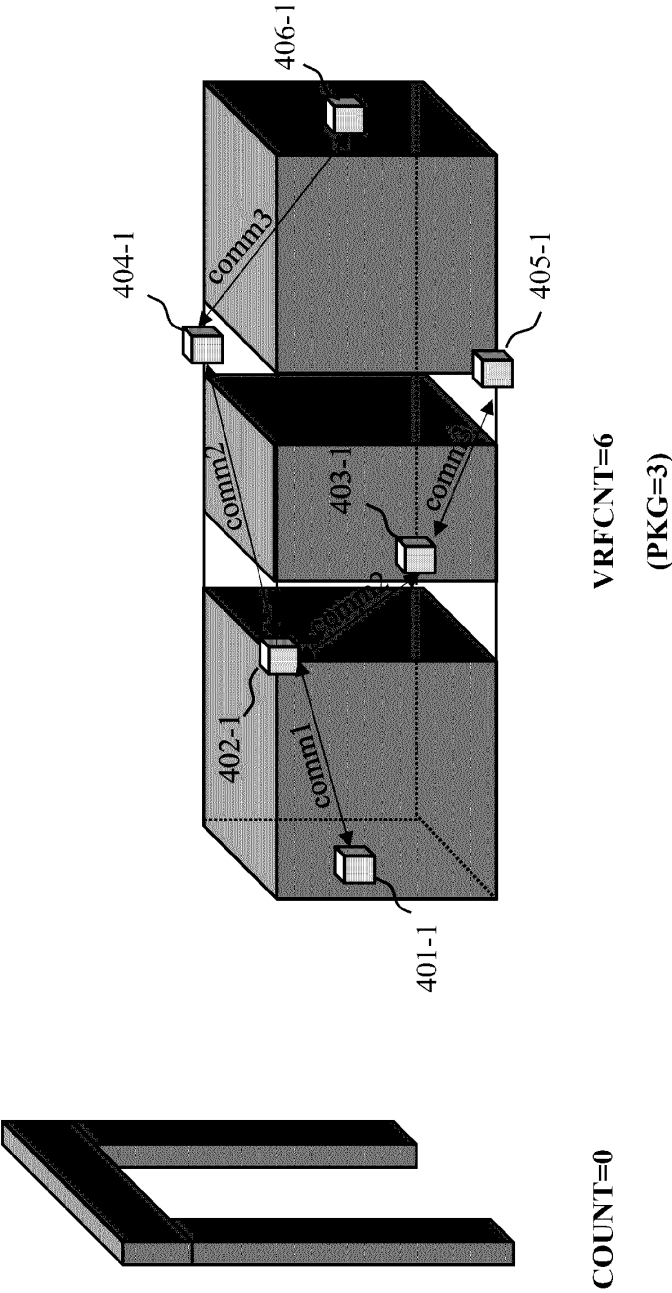


[도17b]

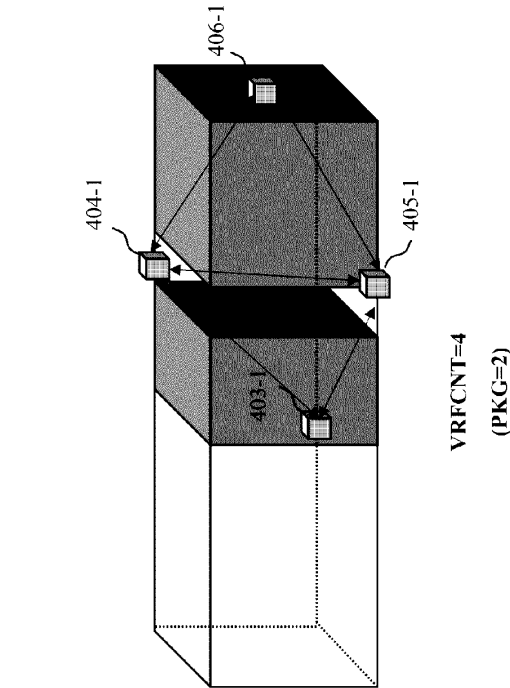


[도17c]

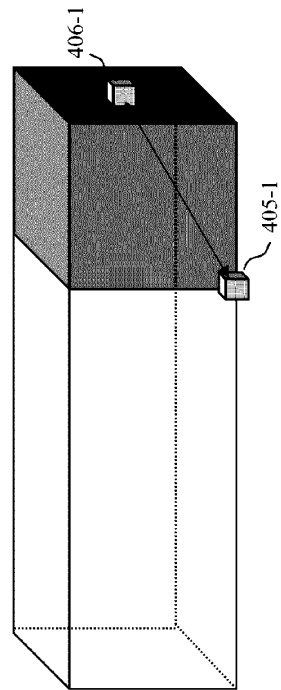


VRFCNT=2
(PKG=1)



COUNT=3

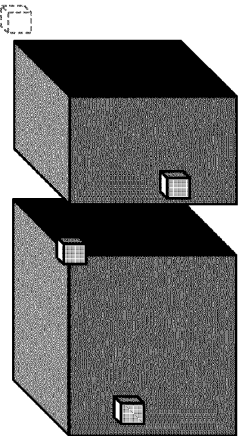

[도17d]

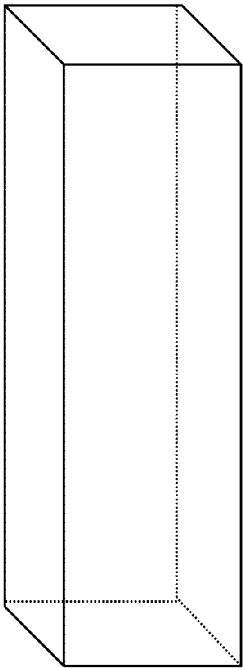

VRFCNT=0
(PKG=0)



COUNT=4

