

sending a sensing measurement setup request frame, in which the sensing measurement setup request frame carries first time interval information between two consecutive sensing measurement instances, and the first time interval information indicates at least one of: a value of a first time interval between the two consecutive sensing measurement instances, a maximum value of the first time interval, or a minimum value of the first time interval

101

FIG. 1

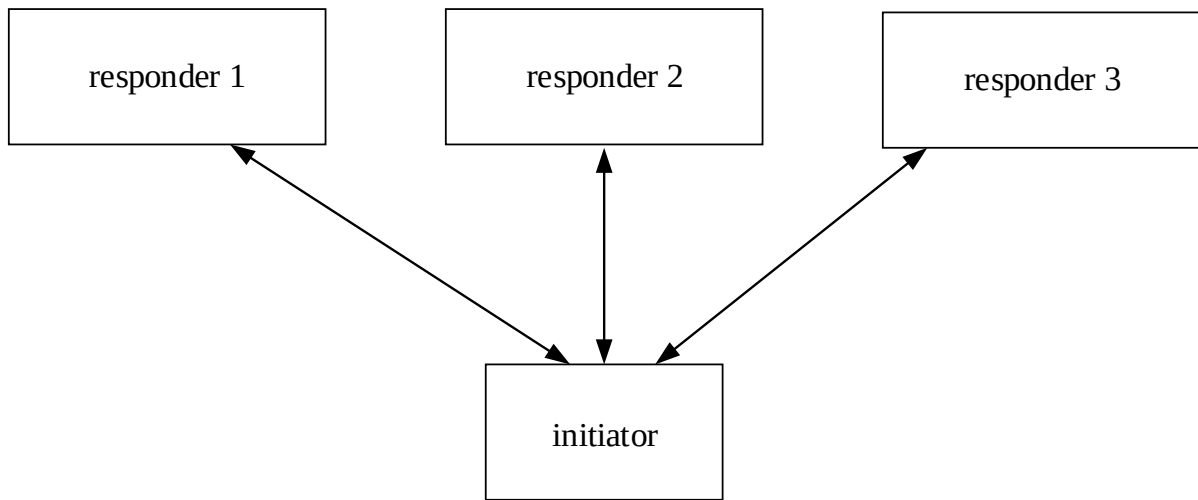


FIG. 2

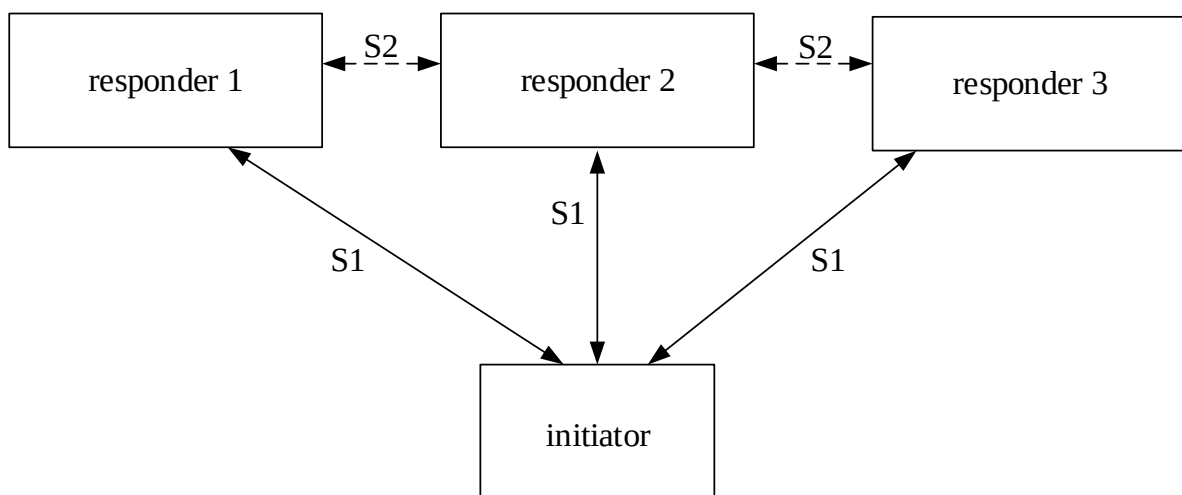


FIG. 3

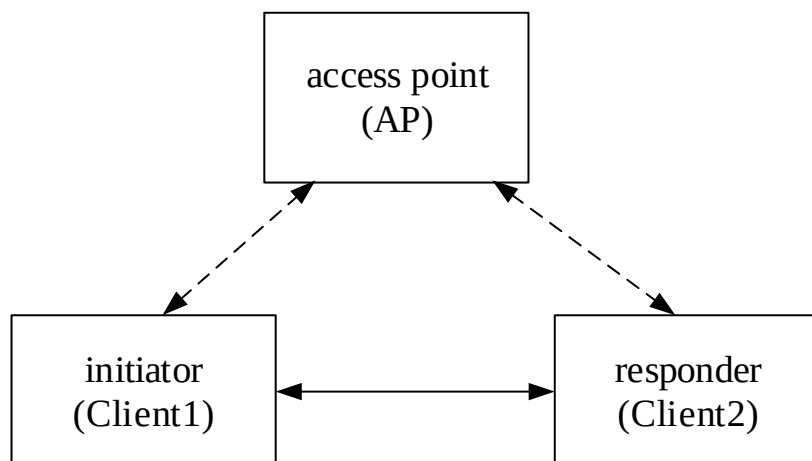


FIG. 4

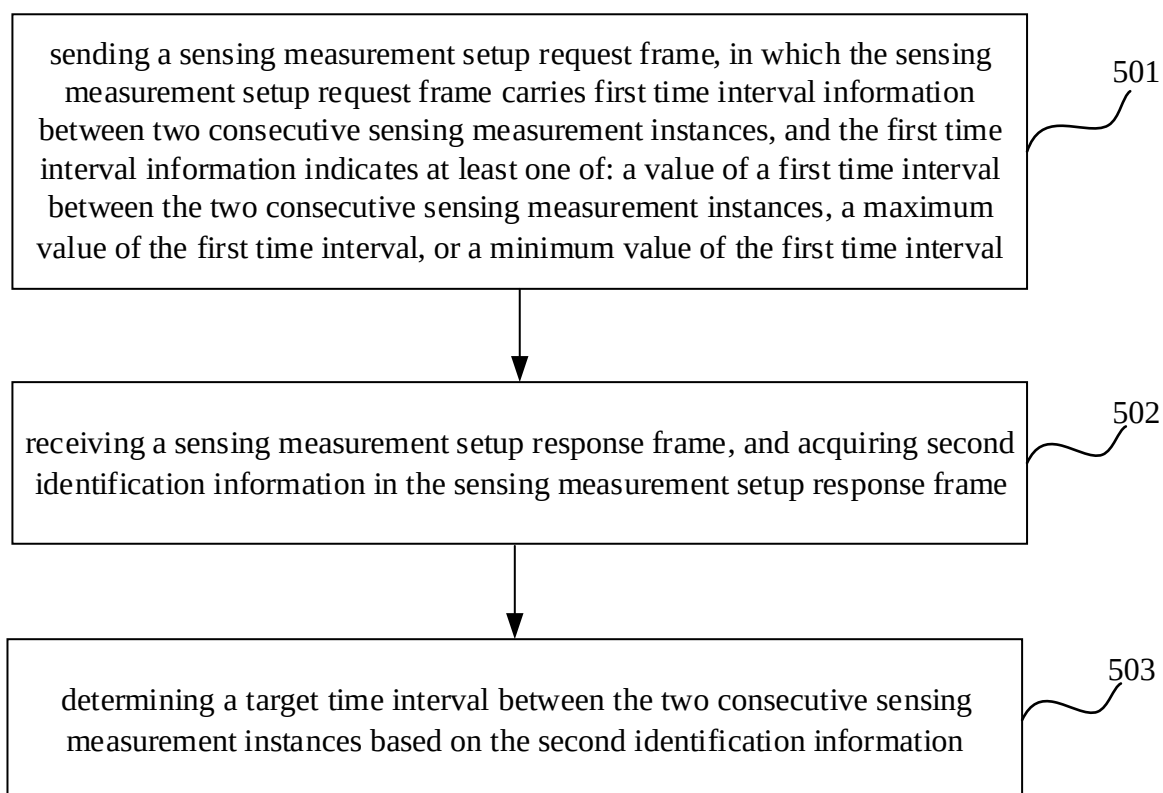


FIG. 5

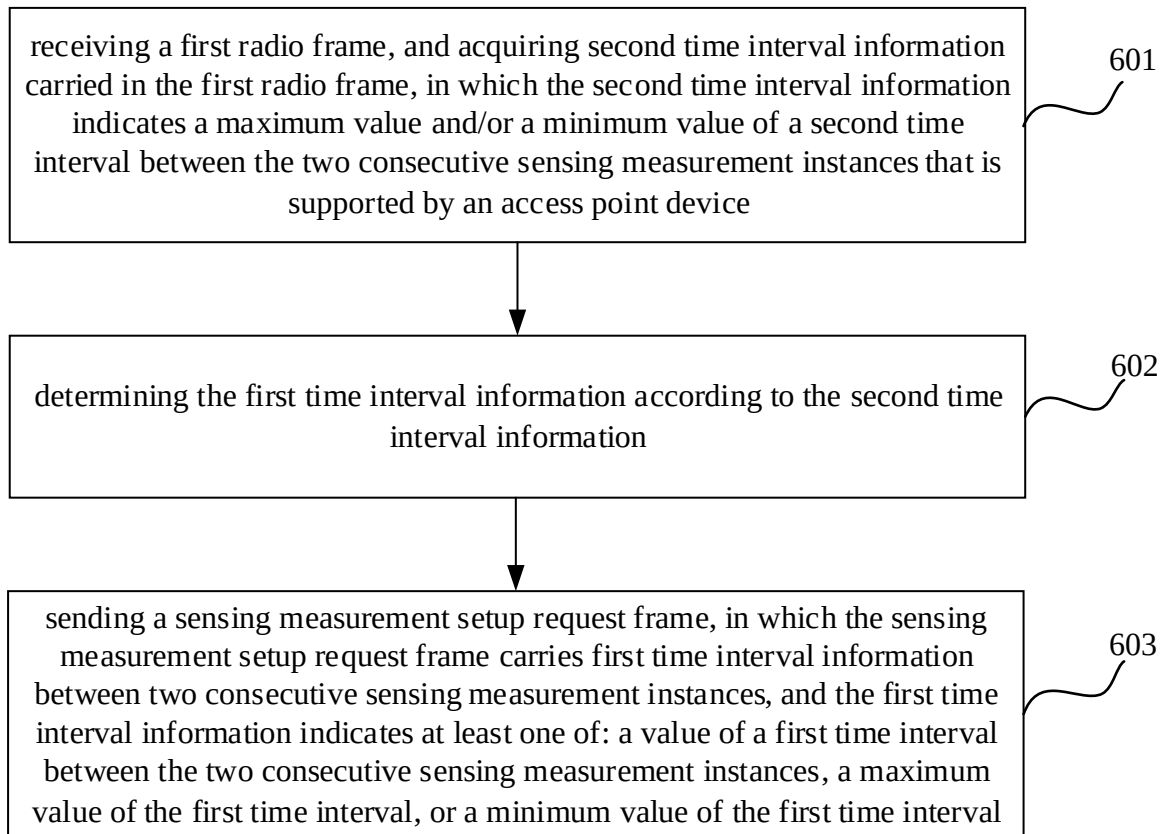


FIG. 6

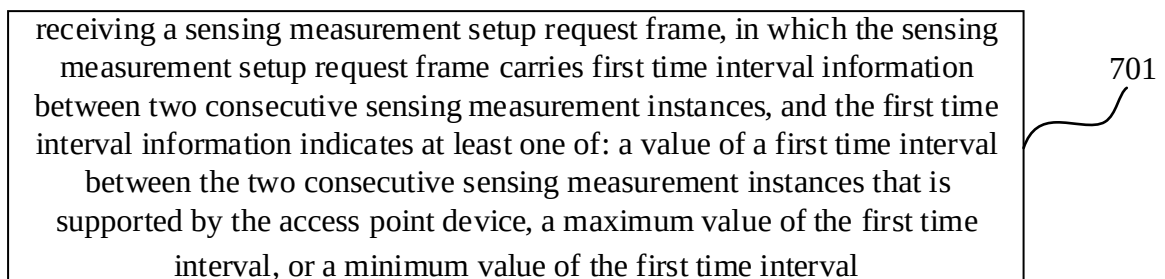


FIG. 7



FIG. 8



FIG. 9

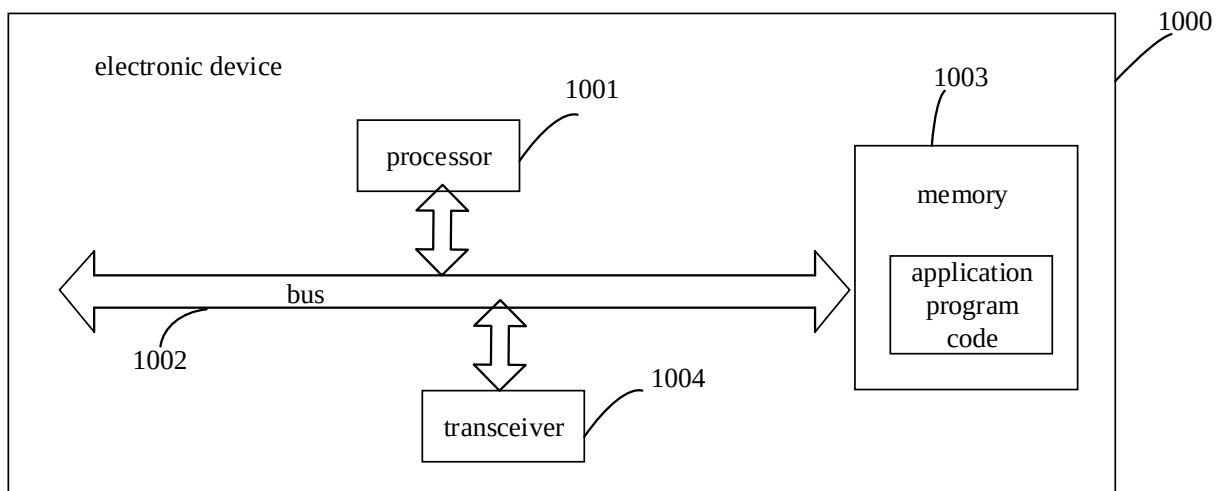


FIG. 10