

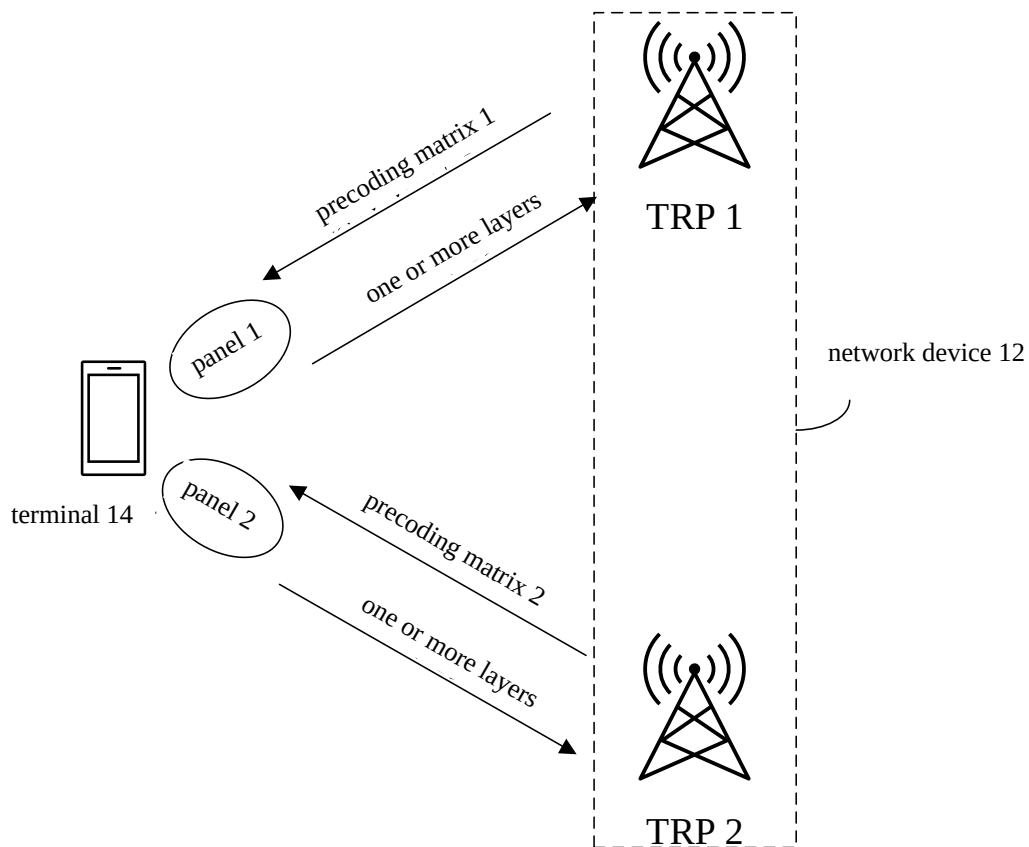


FIG. 1

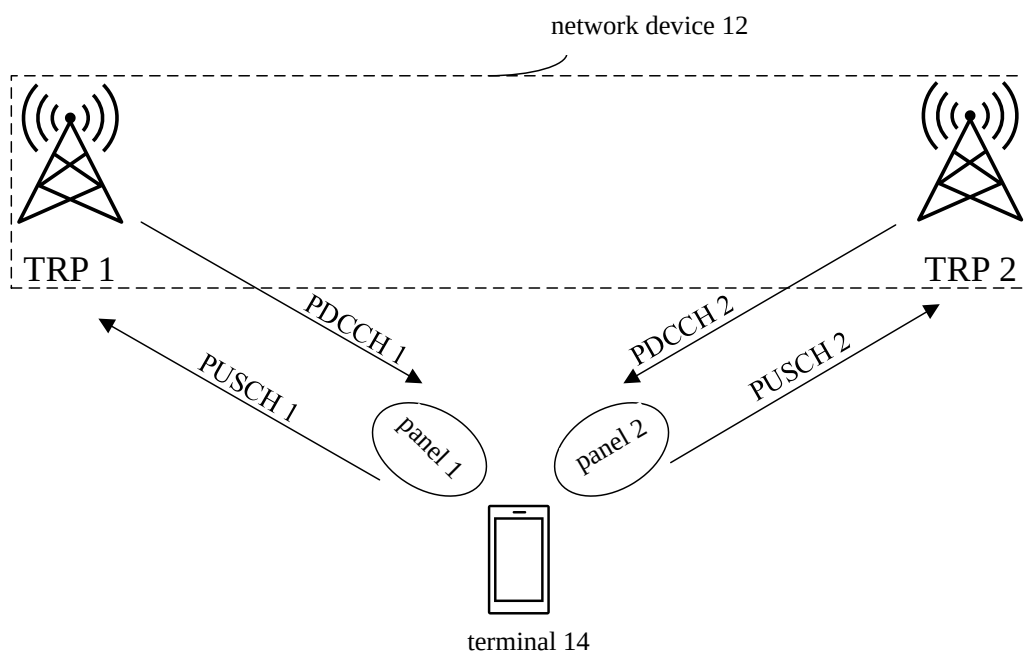


FIG. 2

terminal 22

network device 24

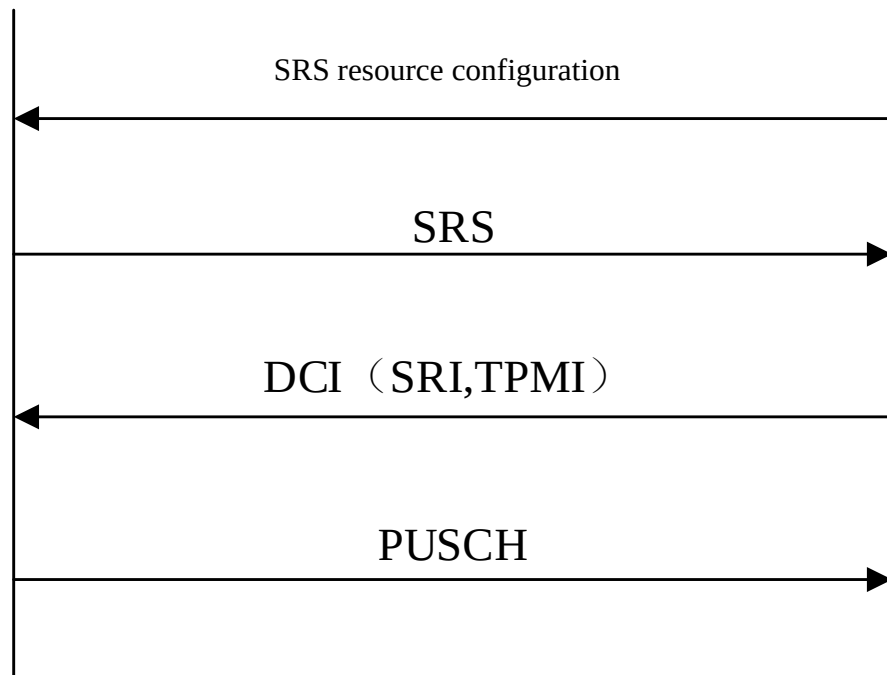


FIG. 3

terminal 22

network device 24

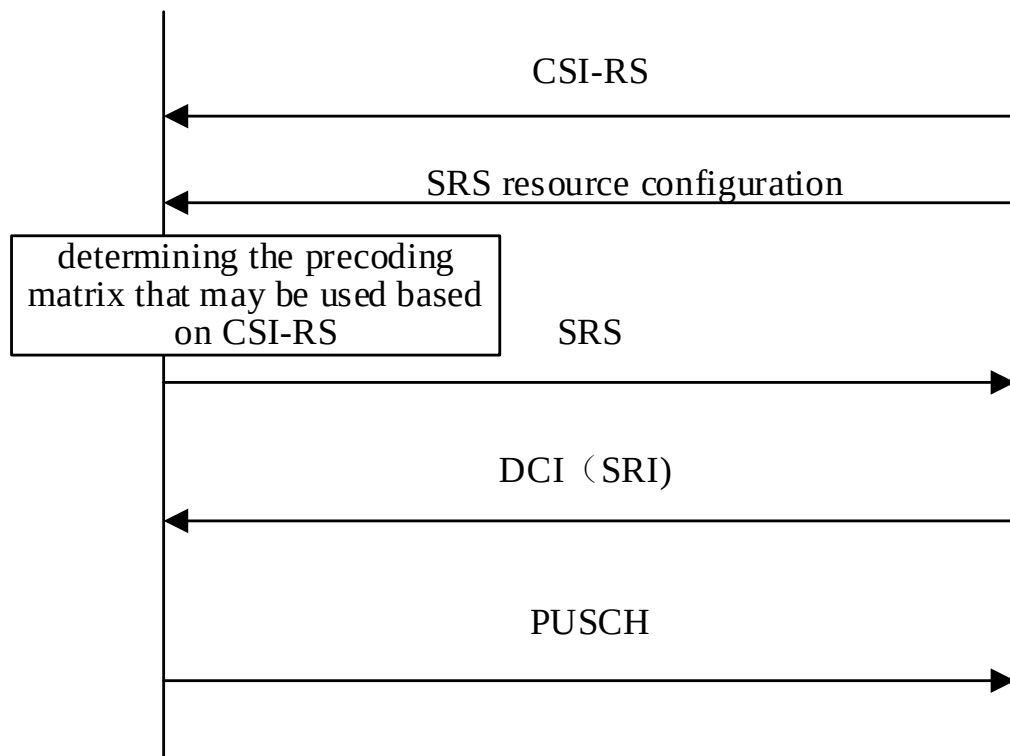


FIG. 4

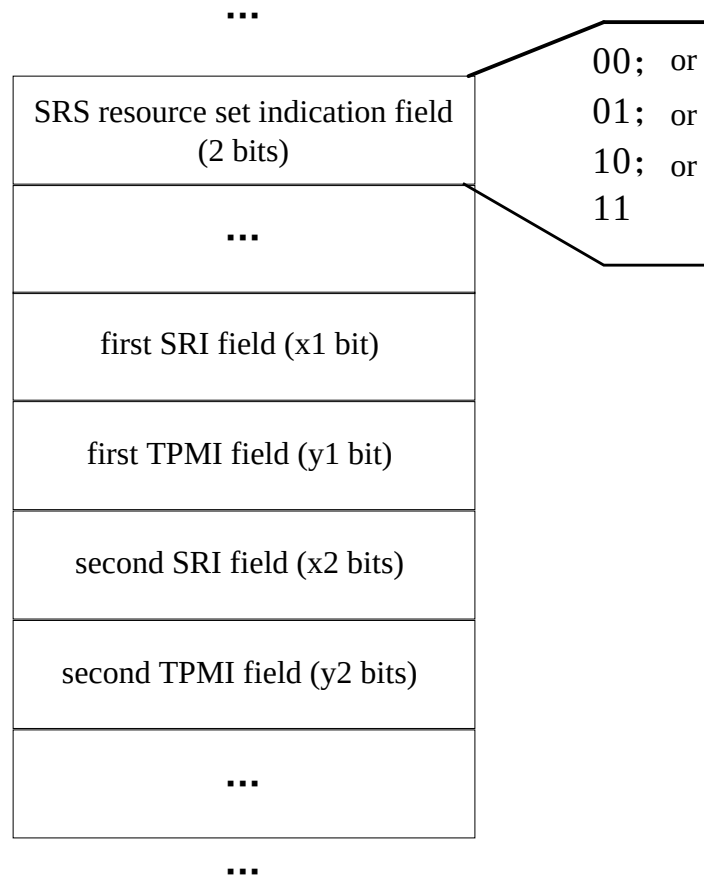


FIG. 5

the terminal receives DCI carrying a first indication field, where a part of code points in the first indication field indicates an SRS resource set and an SRI/TPMI field associated with an STxMP configuration scheduled by a single DCI and associated in a case where uplink data channel scheduling of the terminal is uplink transmission from a single panel to a single TRP

602

FIG. 6

the network device sends DCI carrying a first indication field to a terminal, where a part of code points in the first indication field indicates an SRS resource set and an SRI/TPMI field associated with an STxMP configuration scheduled by a single DCI and associated in a case where uplink data channel scheduling of the terminal is uplink transmission from a single panel to a single TRP

702

FIG. 7



FIG. 8



FIG. 9

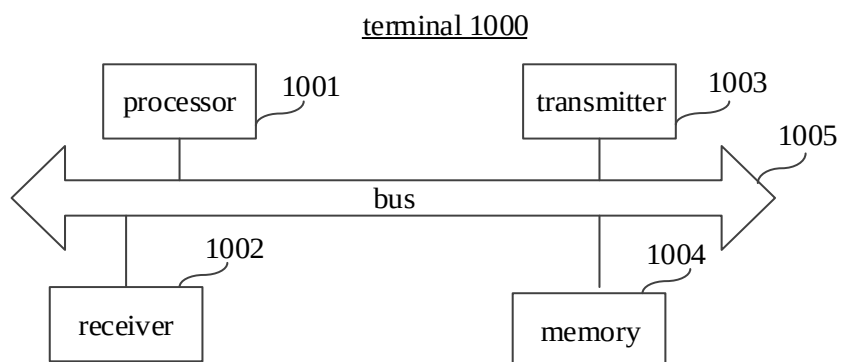


FIG. 10

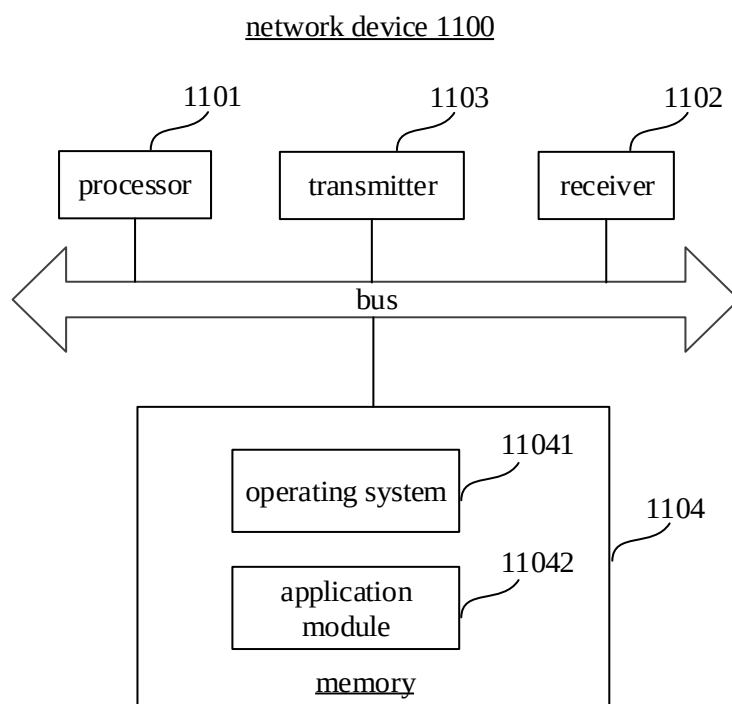


FIG. 11