



(51) International Patent Classification:

G01L 7/08 (2006.01) G01L 7/04 (2006.01)
A62C 13/00 (2006.01) G01L 19/12 (2006.01)
A62C 13/76 (2006.01) G01L 19/16 (2006.01)

(21) International Application Number:

PCT/AU2024/050404

(22) International Filing Date:

26 April 2024 (26.04.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2023903301 16 October 2023 (16.10.2023) AU

(71) Applicant: **BCAI SOLUTIONS PTY LTD** [AU/AU];
Level 14, 99 Gawler Place, Adelaide, South Australia 5000
(AU).

(72) Inventors: **BROWN, Nathan**; Level 14, 99 Gawler Place,
Adelaide, 5000, South Australia (AU). **LEI, Zhang**; APT
BLK 627, Jurong West Street 65, #07-376, 640627 (SG).

(74) Agent: **MURRAY TRENTO & ASSOCIATES PTY
LTD**; PO BOX 2191, BLACKBURN SOUTH, Victoria
3130 (AU).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: DIGITIZED PRESSURE GAUGE

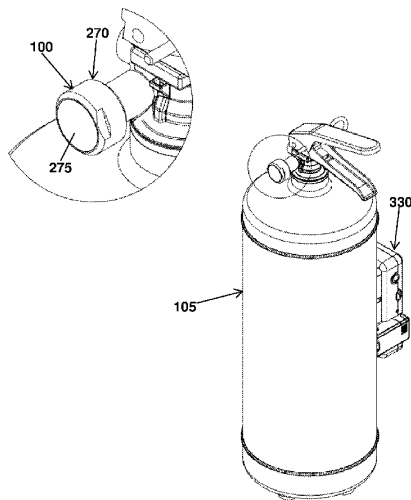


Fig. 1

(57) Abstract: The present invention relates to a pressure gauge for a portable fire extinguisher, including a pressure sensor having an element that is displaced based upon a change in pressure in the pressurized vessel, and a cam configured to transmit, through a rocker arm, pressurized displacement of the pressure sensor element to a rotatable pointer shaft. The cam is configured to rotate according to displacement of the pressure sensor element and thereby causes the rocker arm to rotate. The pointer shaft includes a pointer that is configured to provide a visual indication relating to the pressure inside the pressurized vessel. The gauge includes a device that detects when one or more of the rotating components has been caused to rotate beyond a threshold angle, wherein rotation beyond the threshold angle of rotation is indicative of the pressure inside the vessel moving above or below a predetermined pressure.

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE