



- (51) **International Patent Classification:**
H04W 36/00 (2009.01) *H04W 36/24* (2009.01)
- (21) **International Application Number:**
PCT/EP2023/071394
- (22) **International Filing Date:**
02 August 2023 (02.08.2023)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2211539.8 08 August 2022 (08.08.2022) GB
- (71) **Applicant:** **NOKIA TECHNOLOGIES OY** [FI/FI];
Karakaari 7, 02610 Espoo (FI).
- (72) **Inventors:** **GÜRSU, Halit Murat**; Mülhauser Strasse
4, 81379 Munich (DE). **AWADA, Ahmad**; Fritz-Bauer-
Strasse 13, 81249 Munich (DE). **SPAPIS, Panagiotis**;
Unterwaldenstrasse 1, 81475 Munich (DE). **KARABU-
LUT, Umur**; Murnauer Strasse 122a, 81379 Munich (DE).
STANCZAK, Jędrzej; Pomorska 9/3, 50216 Wrocław

(PL). **KORDYBACH, Krzysztof**; ul. Bartosza Glowackiego 41, 51-691 Wrocław (PL). **SELVAGANAPATHY, Srinivasan**; Nokia Solutions and Networks India Private Limited, Manyata Embassy Business Park, Bangalore 560045 (IN).

(74) **Agent:** **NOKIA EPO REPRESENTATIVES**; Nokia Technologies Oy, Karakaari 7, 02610 Espoo (FI).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) **Title:** DUAL CONNECTIVITY

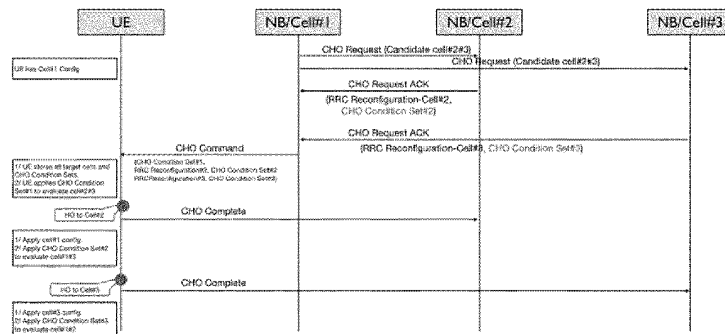


Fig. 8

(57) **Abstract:** There is provided a method, apparatus, and computer program for causing a master node operating with dual connectivity to a user equipment with a first secondary node to: determine that a primary cell of a secondary cell group is to switch from a first cell serving the user equipment, wherein the first cell is provided by the first secondary node; determine, for a second cell provided by a second secondary node, at least one measurement configuration that will remain valid after or during a time period when the primary cell of the secondary cell group serving the user equipment switches from the first cell to the second cell; and provide the at least one measurement configuration to the user equipment.

[Continued on next page]

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))