

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 March 2006 (09.03.2006)


PCT

(10) International Publication Number
WO 2006/026233 A2

- (51) International Patent Classification: **Not classified**
- (21) International Application Number: PCT/US2005/029803
- (22) International Filing Date: 22 August 2005 (22.08.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/928,943 27 August 2004 (27.08.2004) US
10/943,169 16 September 2004 (16.09.2004) US
- (71) Applicant (for all designated States except US): **EVEREADY BATTERY COMPANY, INC.** [US/US]; 533 Maryville University Drive, St. Louis, MI 63141 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WEBBER, Andrew** [GB/US]; 32611 Greenwood Drive, Avon Lake, OH 44012 (US).
- (74) Agent: **TOYE, Russell, H., Jr.**; Eveready Battery Company, Inc., 25225 Detroit Road, Westlake, OH 44145 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LOW TEMPERATURE Li/FeS₂ BATTERY

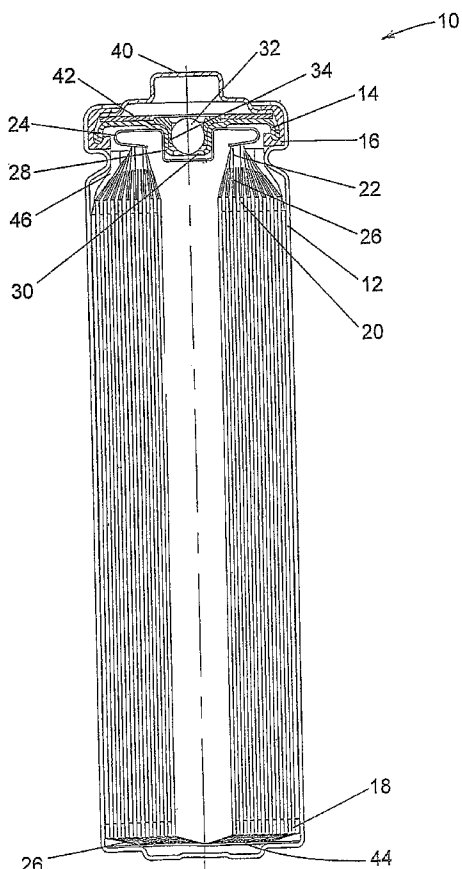

(57) Abstract: The invention is an electrochemical battery cell, particularly a Li/FeS₂ cell, with a nonaqueous electrolyte. The electrolyte has LiI as a primary solute and a solvent including a relatively high level (45 to 80 volume percent) of 1,2-dimethoxyethane and a limited amount (5 to 35 volume percent) of 3-methyl-2-oxazolidinone. The inclusion of 3-methyl-2-oxazolidinone in the electrolyte provides an electrochemical cell which is economical to produce and has good discharge characteristics at room temperature, particularly on high rate and high power discharge, while also providing useful capacity at low temperatures.



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.