PRIOR ART

FIG.1

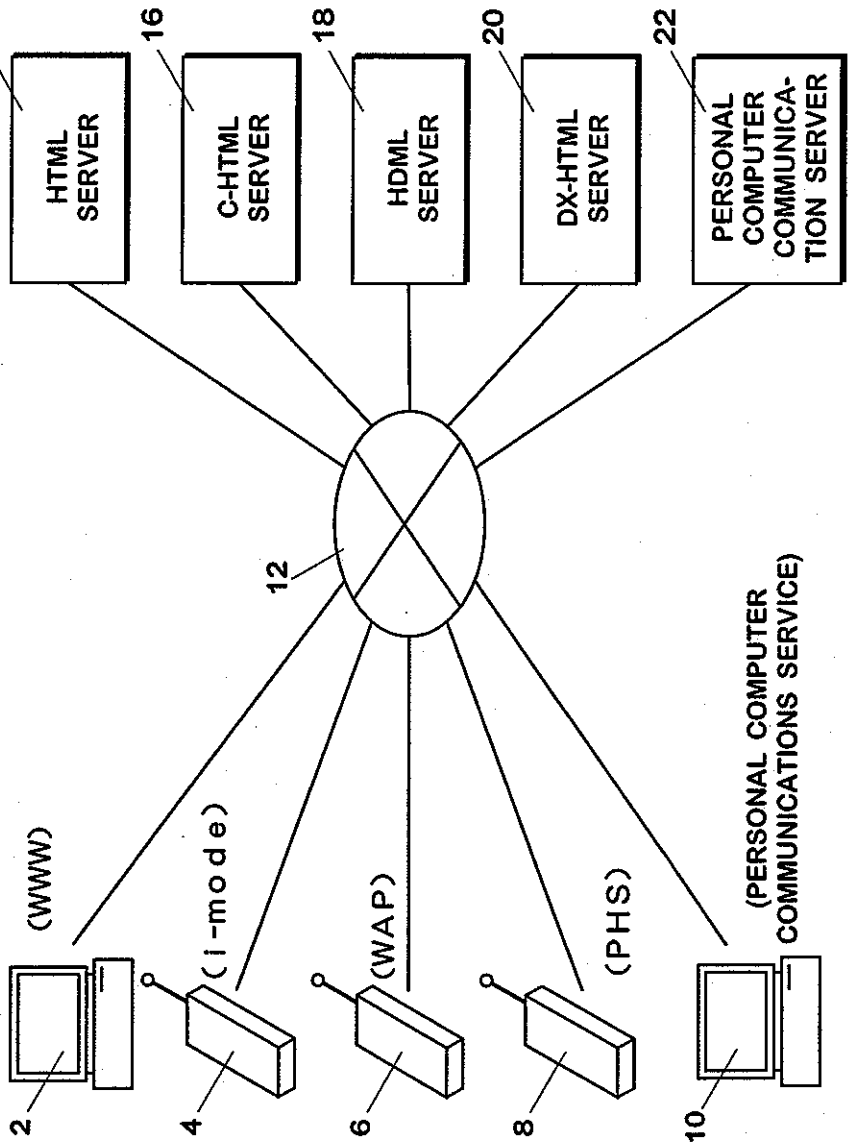
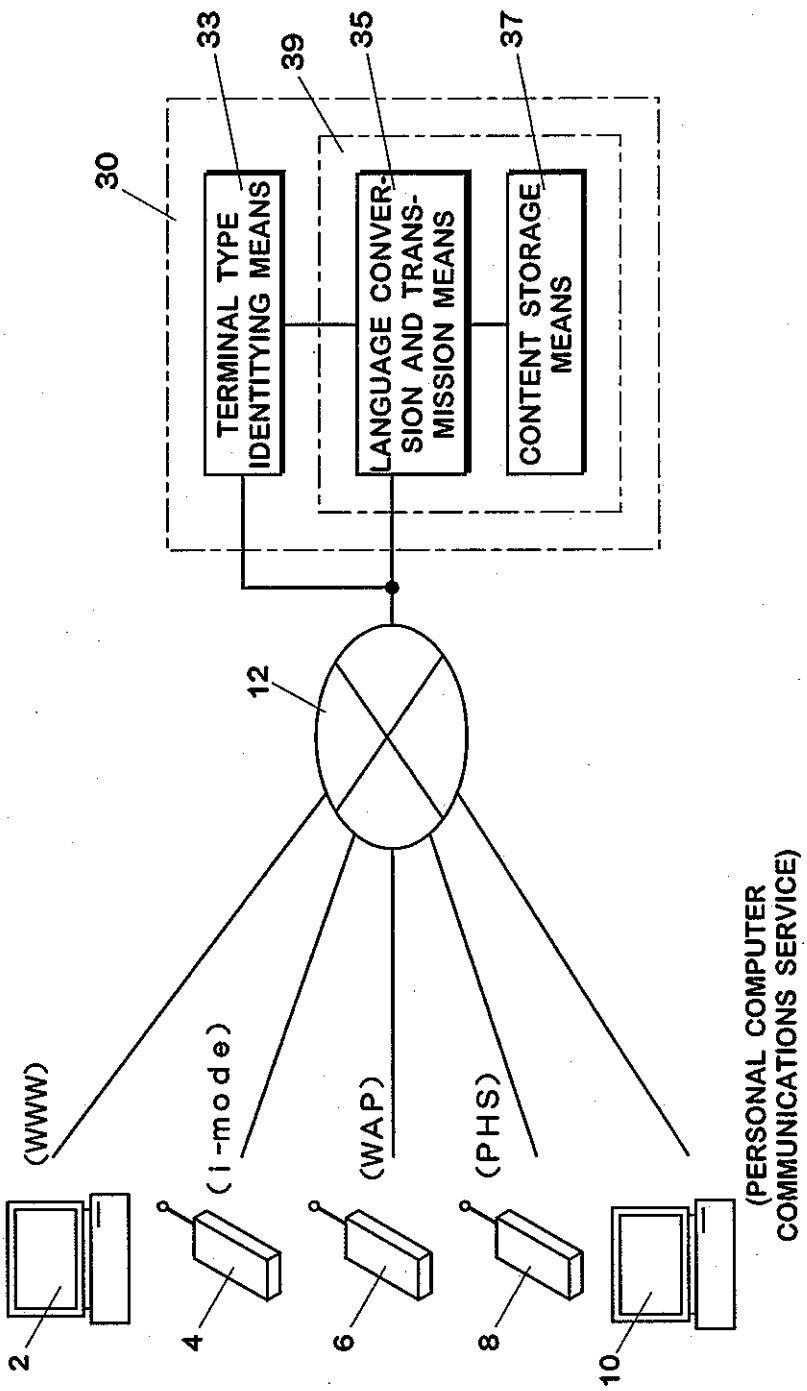


FIG.2a


30
33
39
35
37
TERMINAL TYPE IDENTITYING MEANS
LANGUAGE CONVER-SION AND TRANS-MISSION MEANS
CONTENT STORAGE MEANS
12
(WWW)
(i-mode)
(WAP)
(PHS)
(PERSONAL COMPUTER COMMUNICATIONS SERVICE)
2
4
6
8
10

30 JUN 2004

FIG.2b

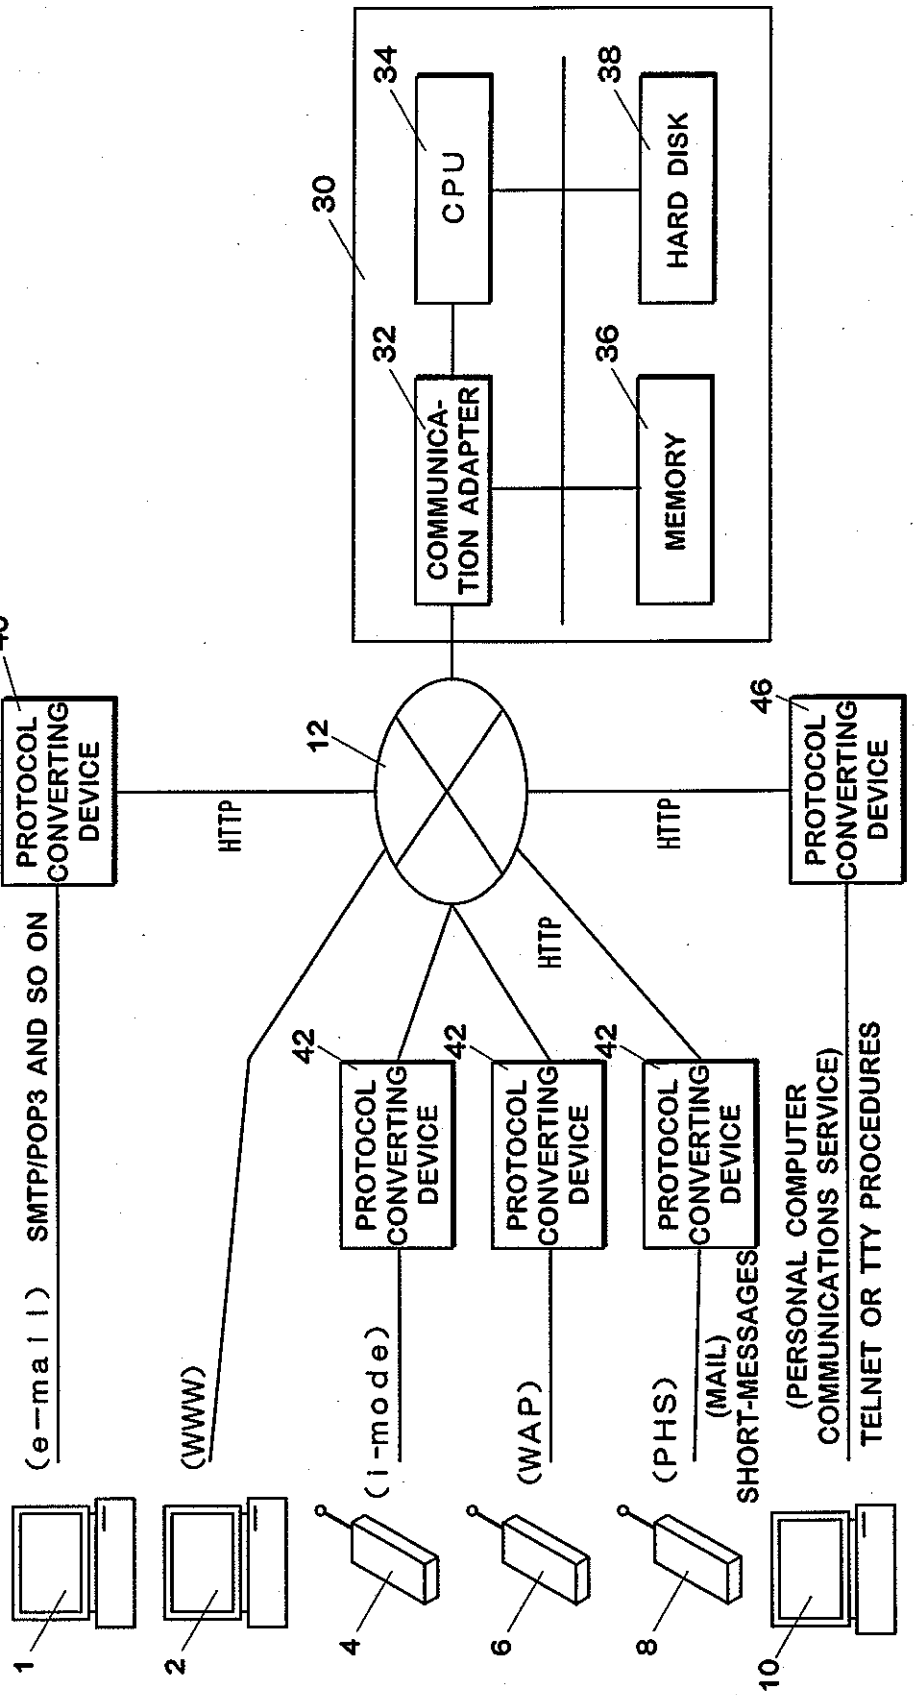
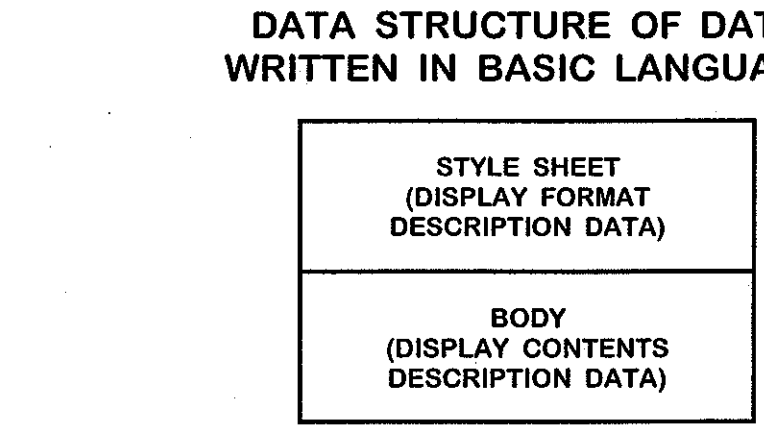


FIG.3


DATA STRUCTURE OF DATA
WRITTEN IN BASIC LANGUAGE
STYLE SHEET
(DISPLAY FORMAT
DESCRIPTION DATA)
BODY
(DISPLAY CONTENTS
DESCRIPTION DATA)

30 JUN 2004

FIG.4

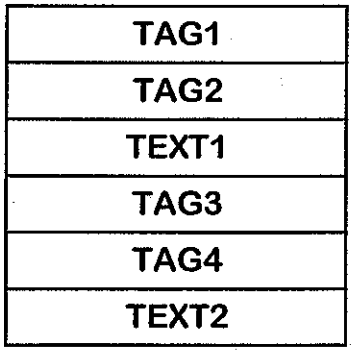


FIG.5



30 JUN 2004

FIG.6

BODY

```
<KSP KEY=K1 NAME="KSP SAMPLE">
<P KEY=R1>SELECT THE MENU</P>
<IMG KEY=R2 SRC=ICOM.JPG>
<A KEY=R3 HREF=MAIL.KSP>E-MAIL</A>
<A KEY=R4 HREF=BBS.KSP>BBS</A>
</KSP>
```

FIG.7

STYLE SHEET

```
<HTML>
<HEAD><TITLE>$K1.NAME$</TITLE></HEAD>
<BODY BACKGROUND=bg.gif>
$R1$<BR>
<IMG SRC=$R2.SRC$>
<A HREF=$R3.HREF$>$R3</A>
<A HREF=$R4.HREF$>$R4</A>
</BODY>
</HTML>
```

FIG.8

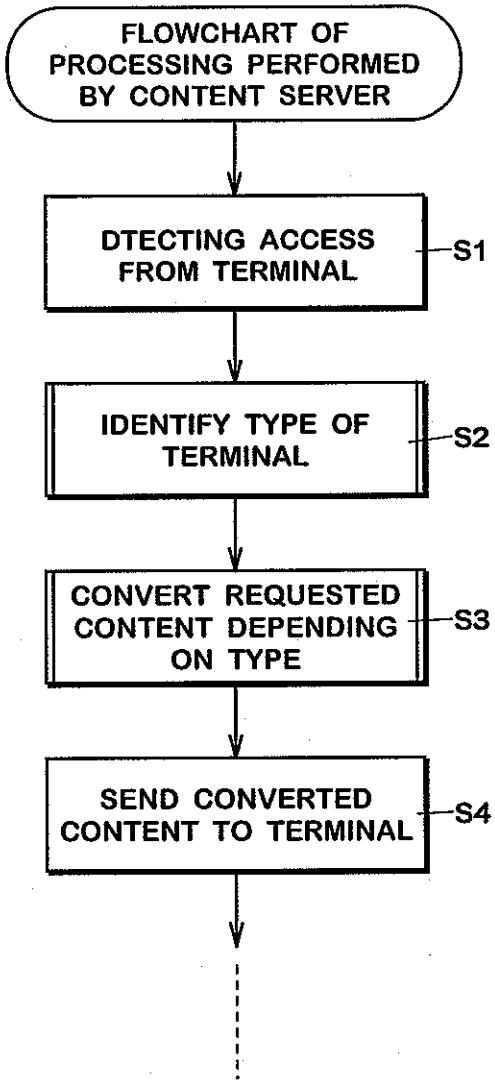

FLOWCHART OF PROCESSING PERFORMED BY CONTENT SERVER
DTECTING ACCESS FROM TERMINAL
S1
IDENTIFY TYPE OF TERMINAL
S2
CONVERT REQUESTED CONTENT DEPENDING ON TYPE
S3
SEND CONVERTED CONTENT TO TERMINAL
S4

FIG.9

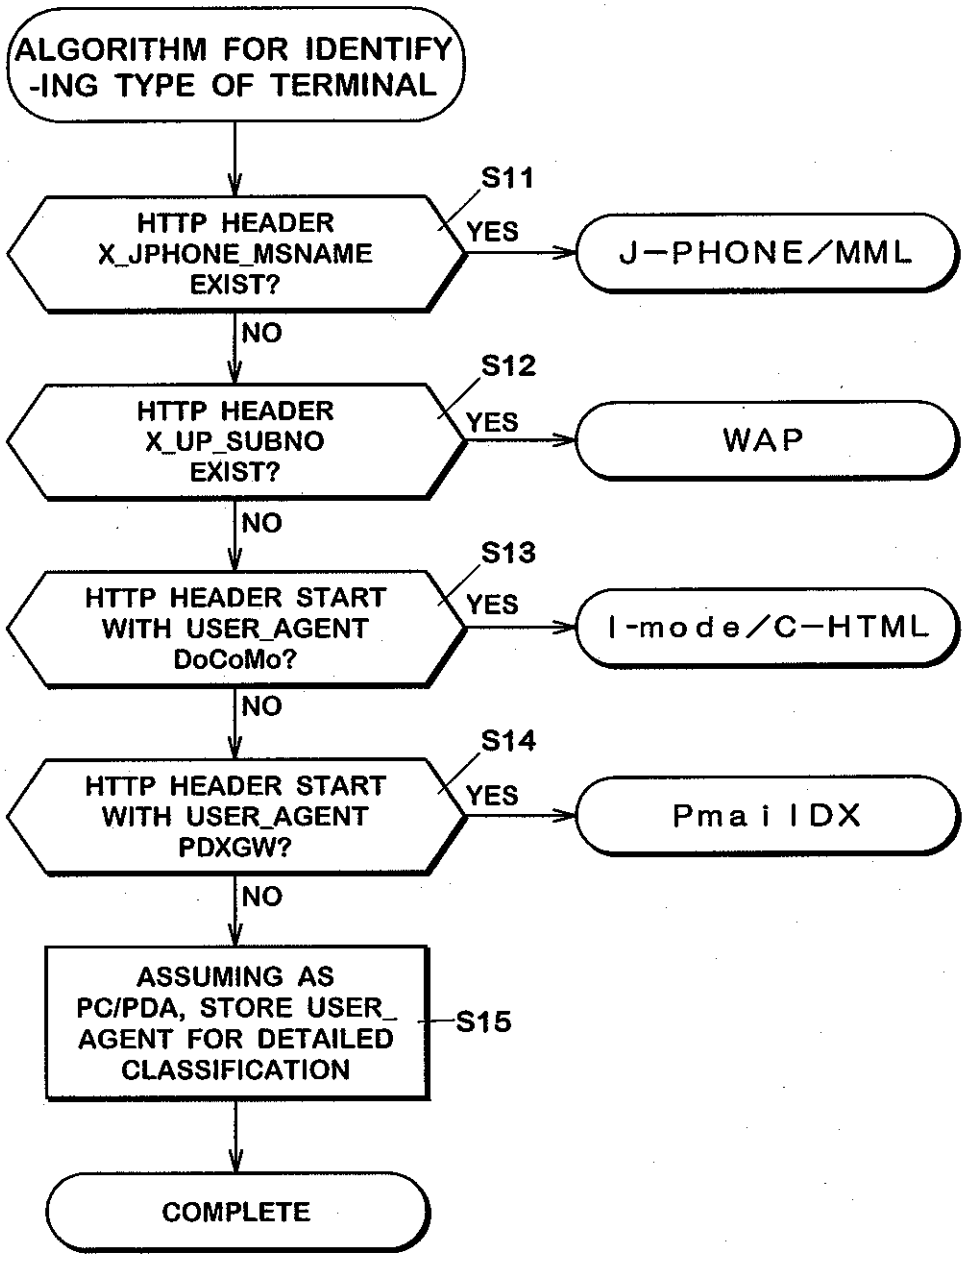

ALGORITHM FOR IDENTIFY -ING TYPE OF TERMINAL
S11
HTTP HEADER X_JPHONE_MSNAME EXIST?
YES
J-PHONE/MML
NO
S12
HTTP HEADER X_UP_SUBNO EXIST?
YES
WAP
NO
S13
HTTP HEADER START WITH USER_AGENT DoCoMo?
YES
I-mode/C-HTML
NO
S14
HTTP HEADER START WITH USER_AGENT PDXGW?
YES
Pmail DX
NO
ASSUMING AS PC/PDA, STORE USER_ AGENT FOR DETAILED CLASSIFICATION
S15
COMPLETE

FIG.10

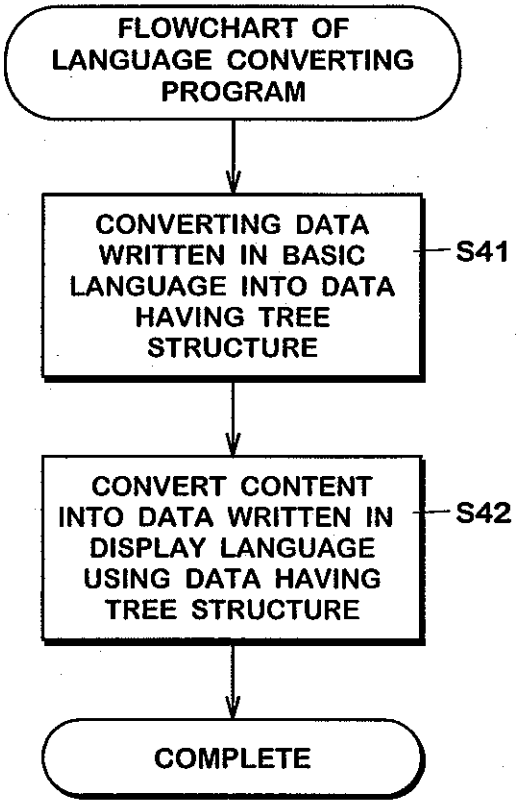

FLOWCHART OF LANGUAGE CONVERTING PROGRAM
CONVERTING DATA WRITTEN IN BASIC LANGUAGE INTO DATA HAVING TREE STRUCTURE
S41
CONVERT CONTENT INTO DATA WRITTEN IN DISPLAY LANGUAGE USING DATA HAVING TREE STRUCTURE
S42
COMPLETE

FIG.11

TAG NUMBER	
TAG TYPE	
NUMBER OF ATTRIBUTES	
ATTRIBUTE NAME-1	ATTRIBUTE VALUE-1
ATTRIBUTE NAME-2	ATTRIBUTE VALUE-2
ATTRIBUTE NAME-3	ATTRIBUTE VALUE-3
. . .	. . .
TEXT (ONLY A-TAG, P-TAG)	
SUBSEQUENT TAG NUMBER	
TAG NUMBER FOR CHILD TAG(ONLY KSP,FORM,SELECT TAG)	

FIG.12

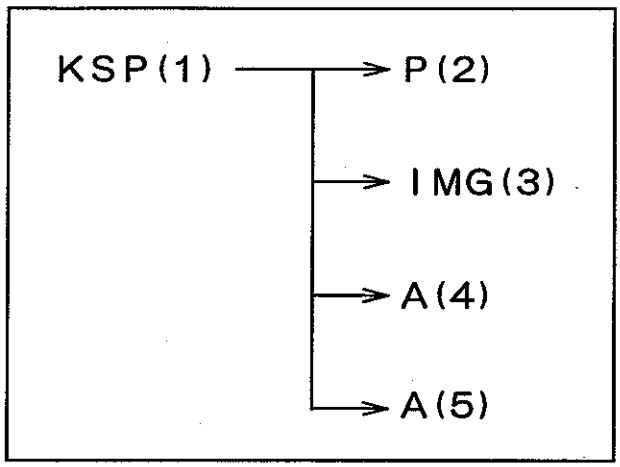
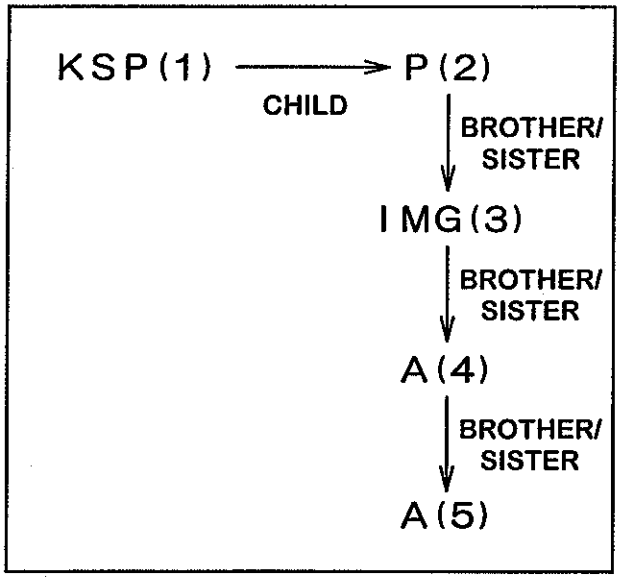


FIG.13


KSP(1)
CHILD
P(2)
BROTHER/
SISTER
IMG(3)
BROTHER/
SISTER
A(4)
BROTHER/
SISTER
A(5)

30 JUN 2004

FIG.14

TAG NUMBER	1
TAG TYPE	KSP
NUMBER OF ATTRIBUTES	2
ATTRIBUTE NAME-1	KEY
ATTRIBUTE VALUE-1	K1
ATTRIBUTE NAME-2	NAME
ATTRIBUTE VALUE-2	KSPSAMPLE
TEXT	(EMPTY)
SUBSEQUENT TAG NUMBER	0(NO CORRESPONDING TAG)
TAG NUMBER FOR CHILD TAG	2

TAG NUMBER	2
TAG TYPE	P
NUMBER OF ATTRIBUTES	1
ATTRIBUTE NAME-1	KEY
ATTRIBUTE VALUE-1	R1
TEXT	SELECT THE MENU
SUBSEQUENT TAG NUMBER	3
TAG NUMBER FOR CHILD TAG	0(NO CORRESPONDING TAG)

TAG NUMBER	3
TAG TYPE	IMG
NUMBER OF ATTRIBUTES	2
ATTRIBUTE NAME-1	KEY
ATTRIBUTE VALUE-1	R2
ATTRIBUTE NAME-2	SRC
ATTRIBUTE VALUE-2	ICON. JPG
TEXT	(NONE)
SUBSEQUENT TAG NUMBER	4
TAG NUMBER FOR CHILD TAG	0(NO CORRESPONDING TAG)

TAG NUMBER	4
TAG TYPE	A
NUMBER OF ATTRIBUTES	2
ATTRIBUTE NAME-1	KEY
ATTRIBUTE VALUE-1	R3
ATTRIBUTE NAME-2	HREF
ATTRIBUTE VALUE-2	MAIL. KSP
TEXT	MAIL
SUBSEQUENT TAG NUMBER	5
TAG NUMBER FOR CHILD TAG	0(NO CORRESPONDING TAG)

FIG.15

TAG NUMBER	5
TAG TYPE	A
NUMBER OF ATTRIBUTES	2
ATTRIBUTE NAME-1	KEY
ATTRIBUTE VALUE-1	R4
ATTRIBUTE NAME-2	HREF
ATTRIBUTE VALUE-2	BBS. KSP
TEXT	BBS
SUBSEQUENT TAG NUMBER	0(NO CORRESPONDING TAG)
TAG NUMBER FOR CHILD TAG	0(NO CORRESPONDING TAG)

FIG.16

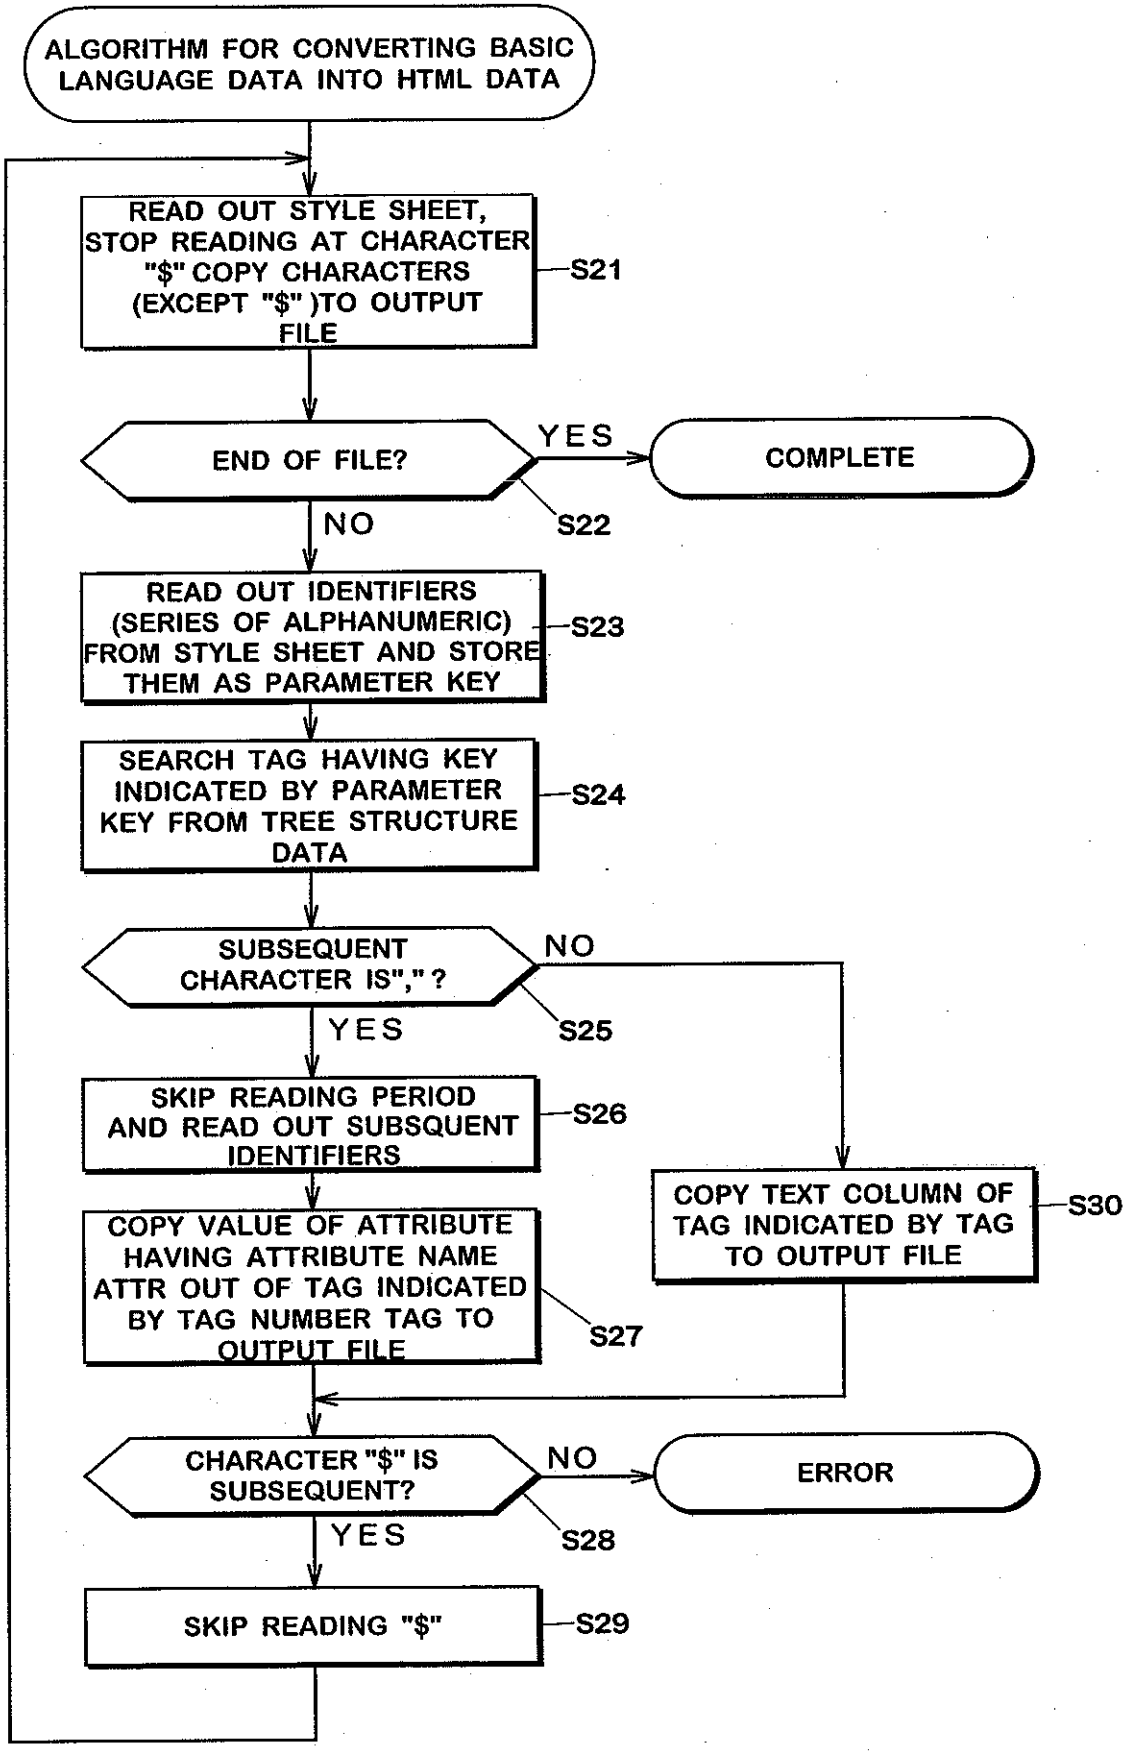

ALGORITHM FOR CONVERTING BASIC LANGUAGE DATA INTO HTML DATA
READ OUT STYLE SHEET, STOP READING AT CHARACTER "$" COPY CHARACTERS (EXCEPT "$")TO OUTPUT FILE
S21
END OF FILE?
YES
COMPLETE
S22
NO
READ OUT IDENTIFIERS (SERIES OF ALPHANUMERIC) FROM STYLE SHEET AND STORE THEM AS PARAMETER KEY
S23
SEARCH TAG HAVING KEY INDICATED BY PARAMETER KEY FROM TREE STRUCTURE DATA
S24
SUBSEQUENT CHARACTER IS"," ?
NO
S25
YES
SKIP READING PERIOD AND READ OUT SUBSQUENT IDENTIFIERS
S26
COPY TEXT COLUMN OF TAG INDICATED BY TAG TO OUTPUT FILE
S30
COPY VALUE OF ATTRIBUTE HAVING ATTRIBUTE NAME ATTR OUT OF TAG INDICATED BY TAG NUMBER TAG TO OUTPUT FILE
S27
CHARACTER "$" IS SUBSEQUENT?
NO
ERROR
S28
YES
SKIP READING "$"
S29

FIG.17

```
<HTML>
<HEAD><TITLE>KSP SAMPLE</TITLE></HEAD>
<BODY BACKGROUND=bg.gif>
SELECT THE MENU<BR>
<IMG SRC=ICOM.JPG>
<A HREF=MAIL.KSP> MAIL</A>
<A HREF=BBS.KSP> BBS</A>
</BODY>
</HTML>
```

30 JUN 2004


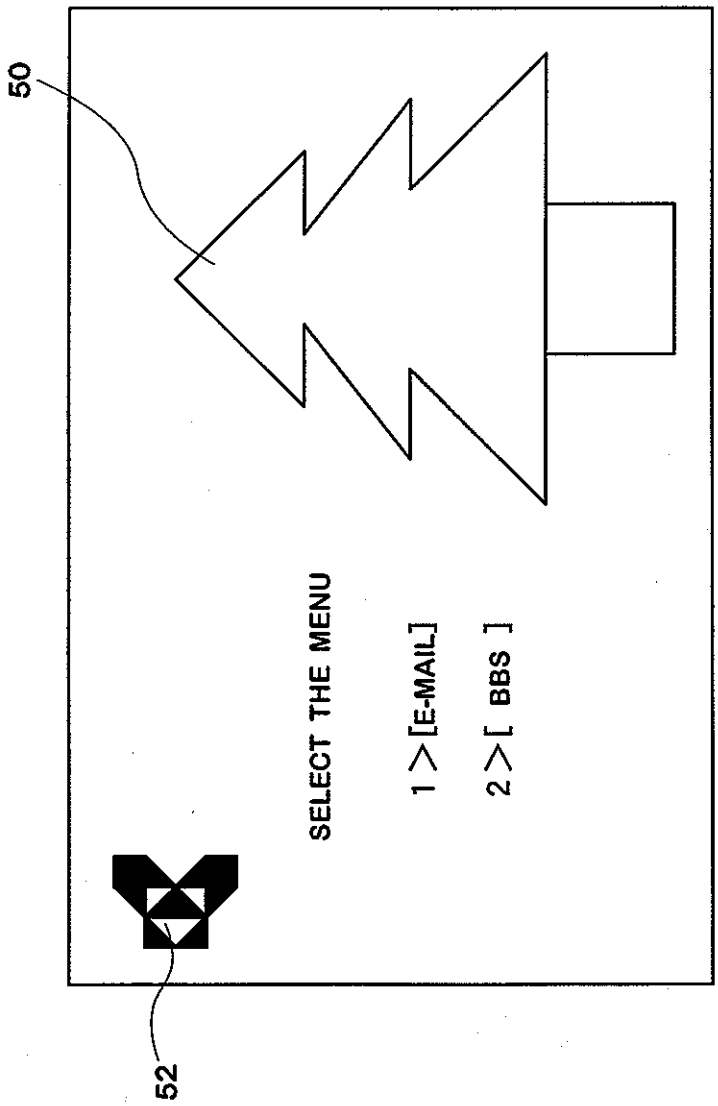


FIG.18

30 JUN 2004

FIG.19A

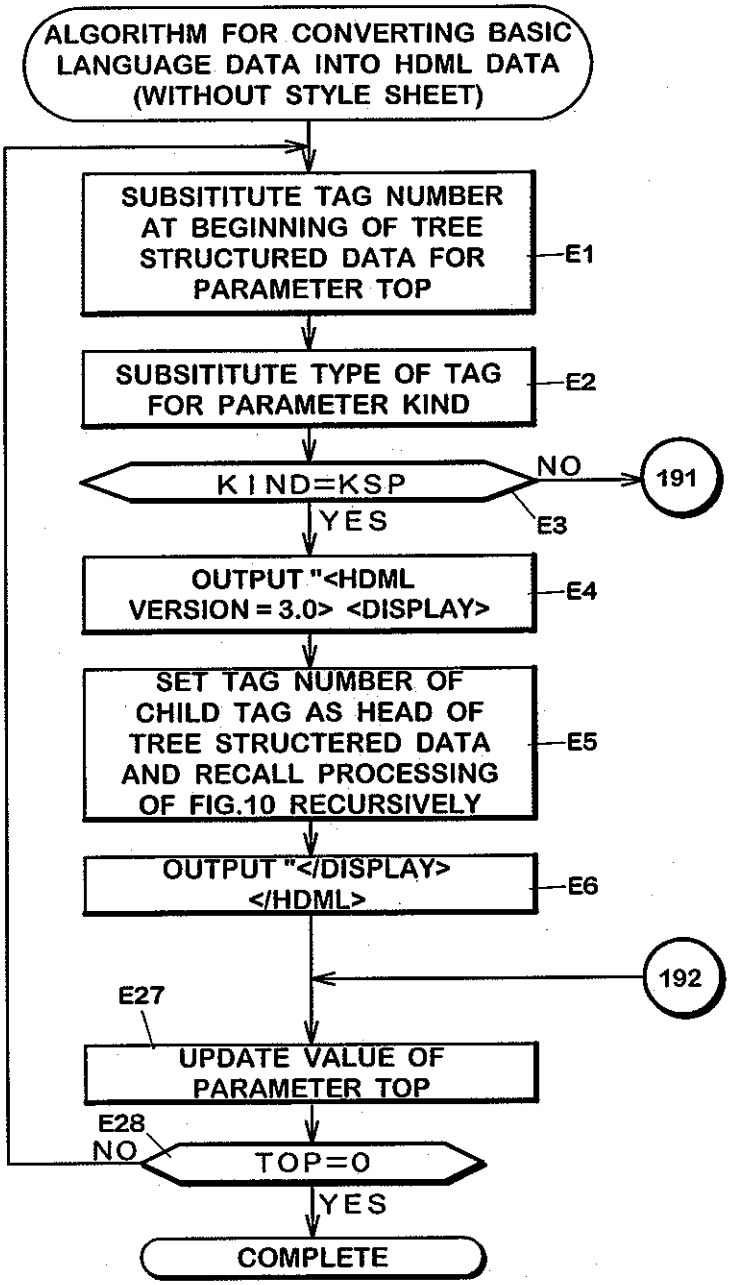

30 JUN 2004

FIG.19B

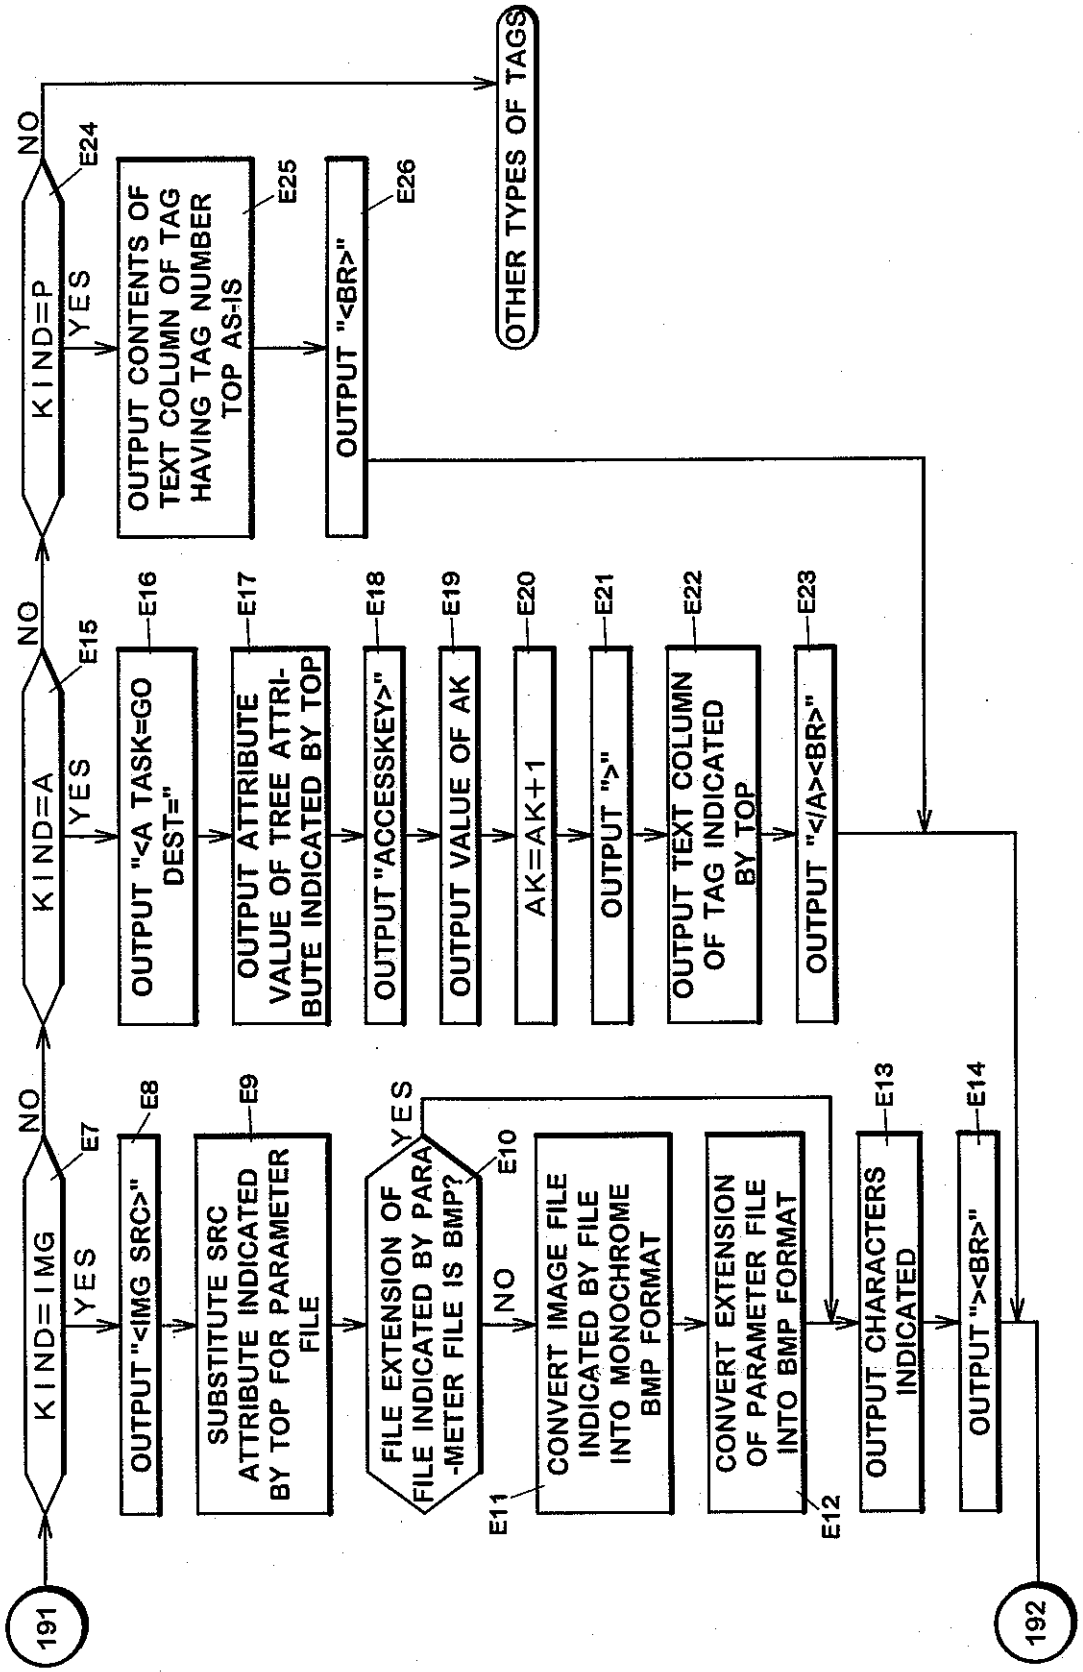
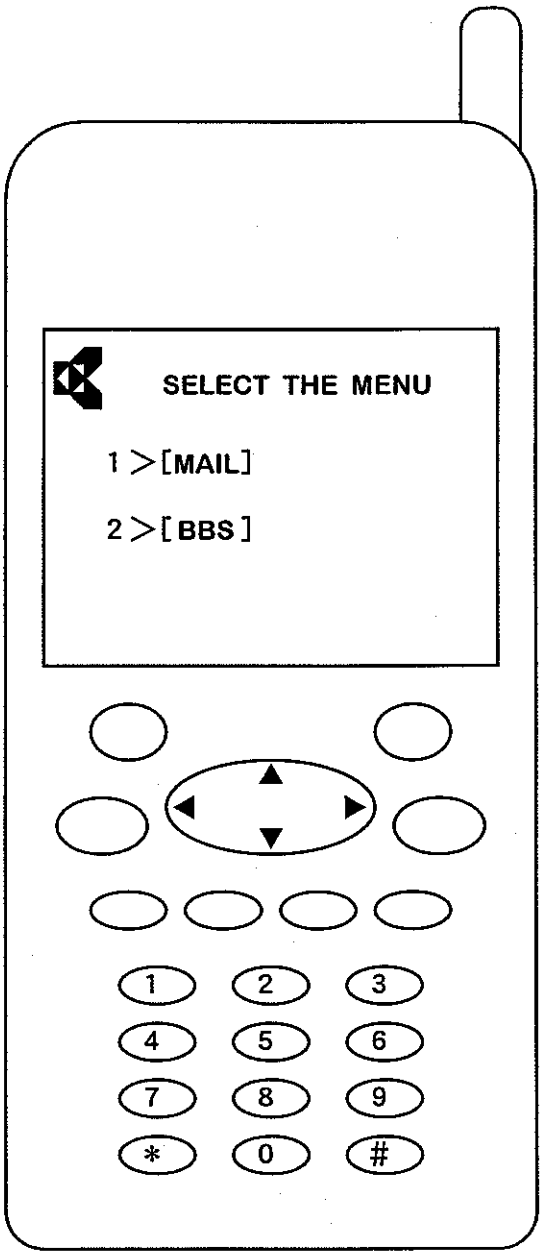


FIG.20

```
<HTML VERSION=3.0>
<DISPLAY>
SELECT THE MENU<BR>
<IMG SRC=ICOM.BMP><BR>
<A TASK=GO DEST=MAIL.KSP ACCESSKEY=1>MAIL </A><BR>
<A TASK=GO DEST=BBS.KSP ACCESSKEY=2>BBS </A><BR>
</DISPLAY>
</HTML>
```


30 JUN 2004

FIG.21



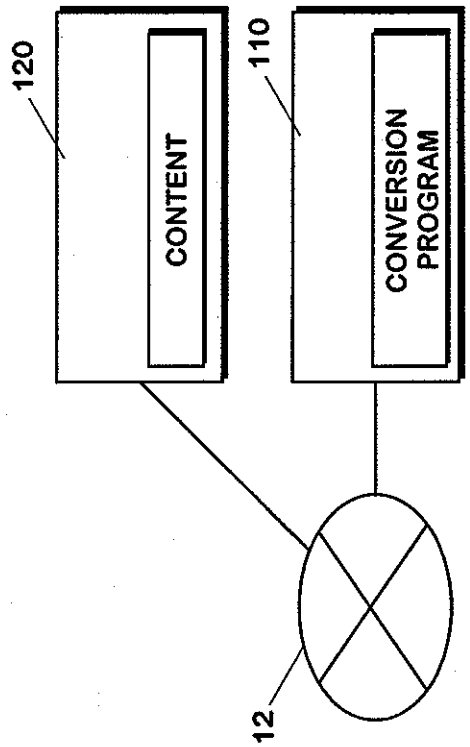


FIG.22

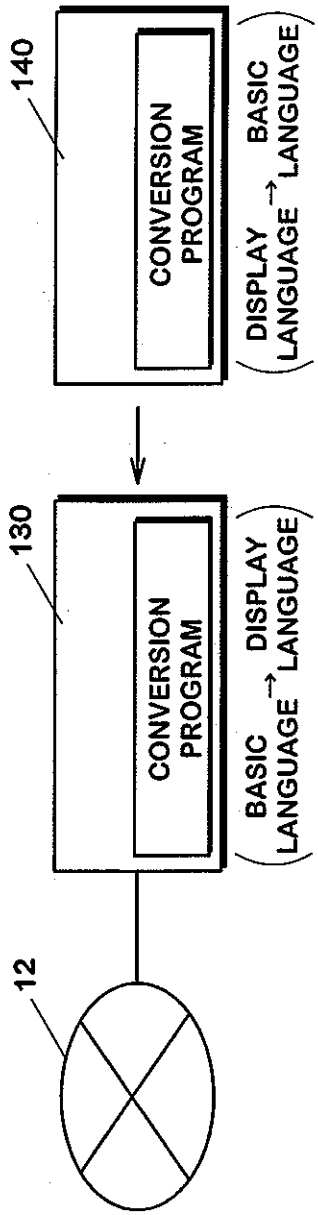
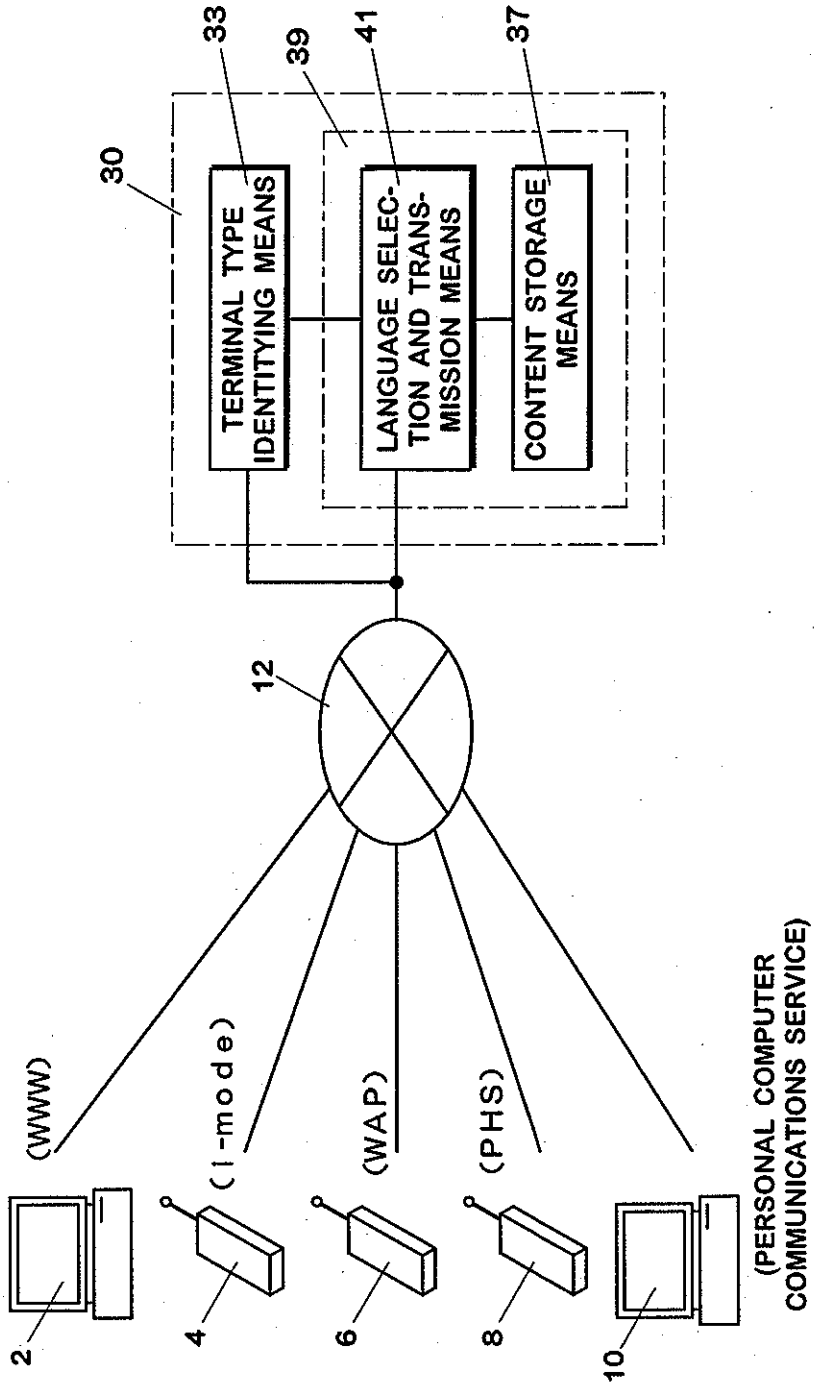

140
CONVERSION PROGRAM
(DISPLAY LANGUAGE → BASIC LANGUAGE)
130
CONVERSION PROGRAM
(BASIC LANGUAGE → DISPLAY LANGUAGE)
12

FIG.23

FIG.24


30
33
39
41
37
TERMINAL TYPE IDENTITYING MEANS
LANGUAGE SELEC-TION AND TRANS-MISSION MEANS
CONTENT STORAGE MEANS
12
(WWW)
(i-mode)
(WAP)
(PHS)
(PERSONAL COMPUTER COMMUNICATIONS SERVICE)
2
4
6
8
10

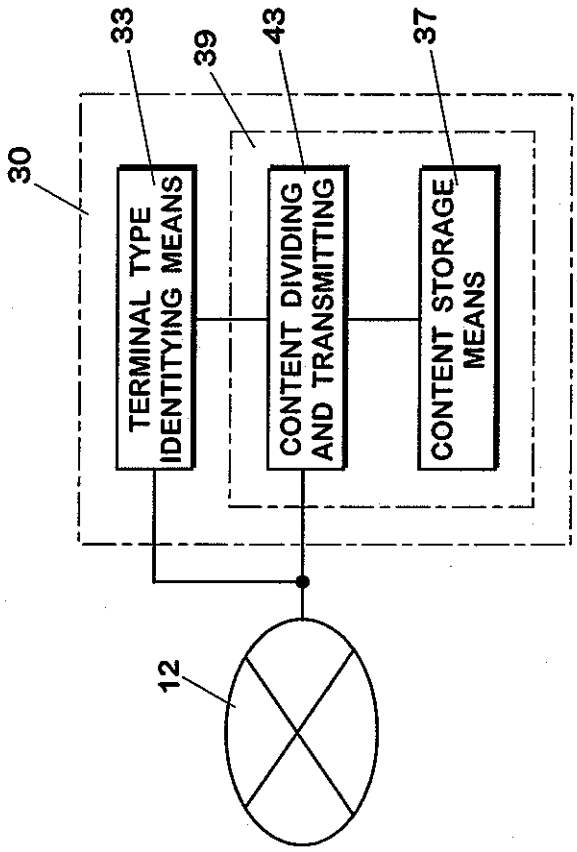

33
39
43
37
30
TERMINAL TYPE IDENTITYING MEANS
CONTENT DIVIDING AND TRANSMITTING
CONTENT STORAGE MEANS
12

FIG.25