



(51) International Patent Classification:

G01N 21/15 (2006.01) G01J 3/02 (2006.01)
G01N 21/33 (2006.01) G01N 21/09 (2006.01)

(21) International Application Number:

PCT/EP2011/053990

(22) International Filing Date:

16 March 2011 (16.03.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PV 2010-398 24 May 2010 (24.05.2010) CZ

(71) Applicant (for all designated States except US): LABIO
A.S. [CZ/CZ]; U Prioru 1/804, 16100 Prague 6 (CZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): VOZKA, Stanislav
[CZ/CZ]; Brazdemska 214, 19000 Prague 9 (CZ).
PODOLAK, Miroslav [CZ/CZ]; Na rozdilu 18, 16000
Prague 6 (CZ).

(74) Agent: ALBIHNS.ZACCO AB; Ingvar Friberg Box 142,
S-401 22 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE FOR UV-SPECTROMETRIC ANALYSIS OF GASEOUS COMPOUNDS

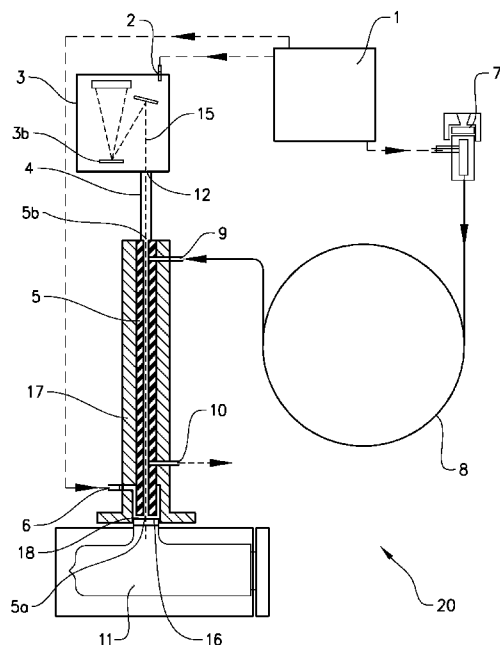


FIG. 1

(57) Abstract: The invention concerns a device (20) for UV-spectrometric analysis of gaseous Compounds, comprising: a measurement Channel (5) to accommodate a flow of sample gas, a window (16) transparent for ultraviolet radiation arranged at a first end (5a) of the measurement Channel (5), a radiation source (11) generating ultraviolet radiation arranged to emit radiation through the window (16) into the measurement Channel (5), and a spectrograph (3) for measuring ultraviolet radiation at a second, opposite, end (5b) of the measurement Channel (5). The invention is characterized in that the spectrograph (3) is provided with an opening (12) wherein the second end (5b) of the measurement Channel (5) is open towards the spectrograph (3) such that an inside of the spectrograph (3) and the measurement Channel (5) are in communication via said opening (12). The spectrograph (3) is filled with a protection gas which is allowed to flow through said opening (12) and into the measurement Channel (5).