

**A METHOD AND SYSTEM FOR DEVICE VIRTUALIZATION BASED  
ON AN INTERRUPT REQUEST IN A DOS-BASED ENVIRONMENT**

**COPYRIGHT NOTICE**

A portion of the disclosure of this patent  
5 document contains material which is subject to copyright  
protection, particularly Appendices A, B and C. The  
copyright owner has no objection to the facsimile  
reproduction by anyone of the patent document or the patent  
disclosure, as it appears in the Patent and Trademark Office  
10 patent file or records, but otherwise reserves all copyright  
rights whatsoever.

**CROSS-REFERENCE TO RELATED APPLICATIONS**

The present application is a continuation-in-part  
of United States Patent Application Serial Number  
15 08/712,363, filed September 11, 1996, by the present  
assignee. The contents of that application are hereby  
incorporated by reference.

**BACKGROUND OF THE INVENTION**

**Field of the Invention**

20 This invention generally relates to computer  
software and, more particularly, it relates to the use of an  
interrupt request for triggering device virtualization  
services in a DOS-based operating system environment.

- 2 -

**Description of the Prior Art**

MS-DOS is Microsoft's 16-bit operating system which runs on PC-XT- and PC-AT- type personal computers (PCS). This operating system (OS) was originally developed for the Intel 8086 and 8088 microprocessors which operate in what is generally referred to as "real-mode." Real-mode refers to the way the microprocessor handles memory (i.e., providing the user with a single-tasking working environment in which programs can freely access system memory and input/output devices). It is noted that real-mode, by itself, does not include features such as memory management or protection.

Today's personal computers are equipped with more advanced processors from Intel, specifically the 80386, 80486, and Pentium, all of which are capable of running 8086-compatible code (real-mode). These processors, however, have a more advanced 32-bit protected-mode which provides hardware support for multitasking, data security and virtual memory. Among other things, protected-mode allows access to more random access memory (RAM) than the 1 megabyte (MB) that the standard real-mode MS-DOS operating system permits (additional details described in King, A., "Inside Windows 95", Microsoft Press, pp. 33-43, 1994, which is herein incorporated by reference).

A typical memory configuration of a personal computer is shown in Figure 1. The memory configuration of Figure 1 shows a memory area 110 containing 640 kilobytes (K) of conventional memory. Because MS-DOS is designed for managing this conventional memory, an additional memory manager is not required. All MS-DOS based programs require conventional memory.

The remainder of the standard 1 MB is referred to as the upper memory area 112 which comprises 384K of memory above the 640K of conventional memory. The upper memory area 112 is generally used by system hardware, such as a display adapter. Unused parts of the upper memory area 112 are called upper memory blocks (UMBs). On any PC, UMBs can

- 3 -

be used for running device drivers and memory-resident programs as described below.

An extended memory (XMS) area 114 is memory located beyond the 1 MB boundary on computers with 80286, 5 80386 or 80486 processors. Extended memory requires an extended-memory manager, such as HIMEM. A high memory area (HMA) 116 is approximately the first 64K of the extended memory area 114. The HMA 116 is a small address region, slightly less than 64K, above the 1 MB boundary that can be 10 accessed by real-mode code. The address region of the HMA is from 100000h through 10ffefh. On a computer with extended memory, the setup program can install MS-DOS to run in the HMA 116. This provides more conventional memory to be available for other software programs.

15 Another type of memory available, as shown in Figure 1, is known as expanded memory. An expanded memory board (EMS) 118 contains additional memory that some MS-DOS based applications can use. Most personal computers accommodate expanded memory. Expanded memory is installed 20 on an expanded memory board 118 and requires an associated expanded memory manager. Computer software programs use expanded memory 64K at a time by addressing a part of the upper memory area 112 known as the EMS page frame. Because an expanded memory manager gives access to a limited amount 25 of expanded memory at a time, using expanded memory is slower than using extended memory. A conventional software program such as EMM386 can simulate expanded memory using extended memory for programs that require it.

As MS-DOS matured through the 1980s, much of its 30 functionality was added in the form of device drivers. As set forth in the Encyclopedia of Computer Science, Third Edition, IEEE Press (1993), which is hereby incorporated by reference, a device driver is a program or subprogram that is written to control either a particular hardware device or 35 another software routine. This low-level software program is loaded into memory after the operating system boots and remains in memory for the duration of the operating session.

- 4 -

As mentioned, the device driver can deal directly with the hardware of a particular device. The device driver is capable of responding to hardware and software interrupts and interfacing to the operating system through an established MS-DOS device driver protocol in order to serve as an interface between such hardware or software and the operating system (described in "Microsoft MS-DOS 6 User's Guide", Microsoft Corporation, pp. 87-89, 1993, and which is also hereby incorporated by reference). It should be noted that device drivers are generally limited in size to 64K bytes.

In addition to device drivers, MS-DOS also uses memory-resident software programs, often referred to as terminate-and-stay-resident programs (TSRs). These programs are executed like normal software programs, but after termination, a portion of the program remains installed in memory in order to monitor and/or service hardware or software interrupts. TSRs can also interface with the operating system in a limited sense, but they do not use the MS-DOS device driver protocol.

Both device drivers and TSRs are typically real-mode code and reside in memory below the MS-DOS 1 MB limit. In many cases, these resident software programs reside within the conventional 640K of memory which is normally used by MS-DOS to load and execute programs. As mentioned above, they may reside above the conventional 640K in the upper memory area 112 when, for example, a memory optimizing routine is executed such as MemMaker (additional details are provided in MS-DOS User's Guide, beginning on page 131). In this case, the driver or TSR would be placed into the upper memory area 112 with a link to its location placed in the 640K conventional memory 110 to indicate its memory location in the upper memory area 112. Even so, as more and more device drivers and TSRs are loaded into a system, the maximum allowable memory area for MS-DOS programs, drivers and TSRs is rapidly reduced.

To further illustrate the functional inter-

- 5 -

relationships of MS-DOS, device drivers, hardware, etc., Figures 2 through 4 illustrate the evolution, from a functional perspective, beginning with the original MS-DOS real-mode environment up to present day environments allowing for protected-mode and DOS extenders. It is noted that the functional interrelationships shown in Figures 2 through 4 are well known to those of ordinary skill in the art and well documented as well; therefore, each figure is only briefly described. A more comprehensive treatment of DOS extenders and their evolution is provided in Duncan et al., *EXTENDING DOS, A Programmer's Guide to Protected-Mode DOS*, 2nd Edition, Addison-Wesley (1992), which is herein incorporated by reference for its teaching of DOS extenders and associated aspects relevant herein.

Figure 2 shows a block diagram of a conventional DOS operating environment with no memory management services. This operating environment is similar to that used in the 8086- and 8088-based PCs. The hardware 210 sends an interrupt request, represented by the dotted line 211, to the DOS operating system 212 which is initially serviced by the DOS Interrupt Vector Table 213. Based on the entries in Interrupt Vector Table 213, the interrupt request can be directed to the DOS OS 212, device drivers 214, TSRs 216, etc. Similarly, software interrupts generated by programs 218 are serviced by the DOS Interrupt Vector Table 213 and directed as appropriate.

As mentioned above, with the release of more powerful Intel processors in the late 1980s, special "extensions" to the standard MS-DOS operating system were developed to allow MS-DOS programs to easily access computer memory that would not otherwise be addressable using real-mode code. These extensions (i.e., device drivers) to the operating system take advantage of the protected-mode features of the 80X86 processors while allowing MS-DOS to continue executing in real-mode. These device drivers implement, as a minimum, memory management services referred to as EMS and XMS services. These services allow software

- 6 -

programs to store and retrieve large amounts of data from the memory pool above the 1 MB boundary. However, they do not allow software programs to occupy this memory for execution purposes. The well known programs provided by  
5 Microsoft to implement this functionality are called HIMEM-SYS and EMM386.EXE.

Figure 3 shows a block diagram of a conventional DOS operating environment with conventional memory management services 312 installed for managing the extended  
10 memory area 114. This operating environment is similar to that used in 80286-based PCS through Pentium-based PCS. As shown in Figure 3, a protected-mode operating system 310 executes above the DOS operating system 212. An interrupt request 311 generated in this environment passes first into  
15 the protected-mode operating system 310 allowing for higher level management. As shown, the interrupt request 311, based on entries in an Interrupt Descriptor Table (IDT, described in more detail below), may be directed to memory management services 312, to the Virtual Control Program  
20 Interface (VCPI) 314, to the default DOS service via the DOS Interrupt Vector Table 213, or the like, as in the Figure 2 type systems. As shown, the protected-mode OS includes the IDT 318 as well as a GDT 320. Additional details of the operation of the VCPI are described in the Virtual Control  
25 Program Interface specification, Version 1.0, (1989), which is herein incorporated by reference for its teachings regarding the operation of a VCPI.

Concurrent with the development of these memory extensions was the development of DOS extenders. Figure 4  
30 shows a block diagram of a conventional DOS operating environment with memory management services 312 installed and a DOS extender 410 running. DOS extenders are low-level software components that allow programs to be executed in protected-mode under MS-DOS. The DOS extender 410 allows  
35 protected-mode applications 412 to communicate with hardware and the operating system and vice versa.

These programs can use the vast amount of memory

- 7 -

above 1 MB to execute code as well as to store and retrieve data. However, the DOS extenders do not allow executable code to permanently reside in memory above the 1 MB boundary; rather, upon switching into protected-mode, the  
5 DOS extenders can temporarily copy executable code into the extended memory area for purposes of execution, but upon termination, it no longer exists in extended memory. Even so, the DOS extenders allow programs to apply a much simpler and much more powerful programming model. DOS extenders  
10 achieve their task by switching the processor into protected-mode while running the program, and switching the processor back to real-mode when the program completes.

The DOS extenders also switch the processor in and out of real-mode during the program execution when MS-DOS  
15 functions need to be called, or when device drivers or TSRs need to run. To do this, the DOS extender must be in complete control of the system. Thus, a new protected-mode operating environment is created by the DOS extender. As shown in Figure 4, the newly created protected-mode  
20 operating environment created by the DOS extender 410 includes its own IDT 418 and GDT 420. It is noted, however, that when the DOS extender switches back to real mode it then uses system IDT 318 and system GDT 320.

In systems with memory management enabled, as  
25 shown in Figures 3 and 4, the device drivers that provide these services create their own protected-mode environment and already have MS-DOS running as a (virtual 8086) real-mode task. Therefore, they provide contention management services to negotiate memory allocation and mode switching  
30 between themselves and DOS extenders. This contention management is implemented by all memory managers today via the VCPI 314. If a DOS extender 410 determines that a VCPI 314 is present in a system, it uses this interface to  
acquire its protected-mode context and to perform its mode  
35 switching (real versus protected). In most cases, the DOS extender 410 also allocates all of its required program memory through the VCPI 314.

- 8 -

With this evolution in mind, as available memory, as well as processing power, continue to increase, it is desirable to make efficient use of these computing resources to provide device virtualization, thereby reducing the amount of hardware necessary to provide desirable features.

The 80386 and later processors do generally provide for hardware virtualization by allowing certain instructions to be "trapped." Specifically, if a program executes an "IN" or "OUT" (I/O) instruction, a General Protection Fault handler can be invoked to decide whether or not to let the IN/OUT execute and/or whether or not to emulate the presence of some hardware. This "I/O Trapping" can be applied to any process running below processor privilege level (or ring) 0. Unfortunately, most DOS extenders (Rational Systems' DOS4GW for example) run at ring 0, thus they are not subject to the 80386 I/O trapping mechanism.

In addition to the 80386 I/O trapping mechanism, at least one hardware manufacture has used a combination of external hardware interrupts and software to replace the functions of more costly hardware. Specifically, Advanced Gravis has used a technique which combines a Non-Maskable Interrupt (NMI) and a DOS TSR to virtualize hardware. Although this technique provides hardware virtualization for applications executing in real-mode, it does not provide virtualization for applications executing under a DOS extender, since there is no predetermined method for the operating system to direct the interrupt services of the DOS extender.

There is, therefore, a real need to provide an efficient way of performing device virtualization which is also accessible by DOS extenders.

#### SUMMARY OF THE INVENTION

The present invention involves a technique for providing device virtualization in a DOS based operating environment including the steps of executing an application,

- 9 -

under a DOS extender, on a processor within the DOS-based operating environment, where the application executes within a protected-mode context created for the DOS extender and the protected-mode context includes an interrupt descriptor table (IDT). A processor interrupt is generated when the application addresses a predetermined address related to the device to be emulated and, responsive to the processor interrupt, an appropriate entry in the IDT associated with the protected-mode context of the DOS extender is referenced. In accordance with the invention, the DOS extender's IDT is patched at run-time to vector to device emulation software, thereby allowing the processor to execute computer code designed to emulate the device even though the DOS extender was not present at boot time.

The IDT is patched at run-time in accordance with the invention by intercepting VCPI far-calls or, in a presently preferred embodiment, by also intercepting the VCPI "Switch to Protected Mode" call. In particular, a new VIVO driver of the invention intercepts Int 67h handler calls from DOS virtual 8086 (real mode) software. Int 67h handler, function de0ch, is the VCPI "Switch to Protected Mode" call which is made by the DOS extender when it is in real mode, running under the system's protected mode context. It is a request from the DOS extender asking the VCPI to switch the DOS extender into protected mode and to apply the DOS extender's protected mode context to the system. The VIVO driver also intercepts VCPI far calls by monitoring Int 67h handler, function de01h, which is the VCPI "Get Protected Mode Interface" call.

In accordance with the presently preferred embodiment of the invention, the DOS extender makes the VCPI "Switch to Protected Mode" and "Get Protected Mode Interface" calls at system startup and many times after that during the normal execution of the protected mode application running under the DOS extender. Because the DOS extender is asking the VCPI to apply a new protected mode context, the DOS extender must tell the VCPI what that

- 10 -

context is, and so it passes the VCPI (among others) at least the following: physical address of the Page Directory, linear address and size of the DOS extender's GDT and the DOS extender's IDT, and the like. These arguments tell the VIVO driver of the invention where the DOS extender's GDT and IDT are. By temporarily switching the processor's Page Directory, the VIVO driver can access the DOS extender's IDT and patch it with the appropriate vector to the stored emulation code.

10 In particular, the VIVO driver of the invention performs the following steps to patch the DOS extender's IDT during run-time. First, the VIVO driver intercepts Int 67h, function de0ch (switch to protected mode). The VIVO driver then switches the processor's page directory to that of the DOS extender, which was specified by the DOS extender in the VCPI call. This allows the VIVO driver to properly access the DOS extender's GDT and IDT at run-time. The VIVO driver then checks to see if its IDT entries have already been made into the DOS extender's IDT. If so, it checks to see if the selector entry in the DOS extender's IDT indicates the appropriate entry in the DOS extender's GDT, where the selector entry includes the GDT entries that get installed into the DOS extender's GDT when the VCPI get protected mode interface is called by the DOS extender. If either the DOS extender's IDT entry does not exist, or the selector entry does not match the DOS extender's GDT entry, the VIVO driver's code searches the DOS extender's GDT to find out what selector value corresponds to the VIVO emulation code and then makes the appropriate DOS extender IDT entry using the selector value. The VIVO driver then switches the processor page directory back to that of the system's protected mode context and jumps to the real VCPI switch call. The patched DOS extender IDT may now be used to emulate the device that caused the interrupt to be generated.

- 11 -

**BRIEF DESCRIPTION OF THE FIGURES**

The above and other beneficial features and advantages of the invention will become more apparent from the following detailed description of the invention, of

5 which:

Figure 1 is a block diagram of a conventional memory configuration of a personal computer.

Figure 2 is a high-level functional block diagram of a conventional DOS operating environment.

10 Figure 3 is a high-level functional block diagram of a conventional DOS operating environment with memory management services installed.

Figure 4 is a high-level functional block diagram of a conventional DOS operating environment illustrating the  
15 functional relationships of DOS with memory management services and DOS extenders.

Figure 5 is a high-level functional block diagram of a DOS operating environment as it relates to an exemplary embodiment of the present invention.

20 Figure 6 is a flow diagram of the initialization operation, at boot time, of an exemplary embodiment of the present invention.

Figure 7 is a flow diagram of the operation of an exemplary embodiment of the present invention, at run time,  
25 to provide compatibility with DOS extenders by intercepting VCPI far calls.

Figure 8 is a flow diagram of the operation of a presently preferred embodiment of the present invention, at run time, to provide compatibility with DOS extenders by  
30 intercepting VCPI "Switch to Protected Mode" calls.

**DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS****Overview**

As mentioned above in the Background section, device virtualization, in general, is known. Unfortunately,  
35 when running in the context of DOS extenders (e.g., Rational

- 12 -

Systems' DOS4GW), device drivers cannot take advantage of the I/O trapping mechanism, nor can they take advantage of Advanced Gravis technique mentioned above in the Background section.. Because many present day applications use DOS  
5 extenders for various reasons, a device virtualization technique should be accessible by applications running under DOS extenders.

Generally, the present invention provides device virtualization, in an MS-DOS based operating environment, by  
10 way of an interrupt request (e.g. non-maskable interrupt) for applications running with or without a DOS extender. The present invention dynamically extends its device virtualization capabilities to applications running under DOS extenders by intercepting communications between the DOS  
15 extender and the VCPI at run-time. In particular, when an executing application requests the use of a particular device (e.g., requesting a predetermined I/O address), a processor interrupt request is generated. In response to the interrupt request, the device virtualization code for  
20 that particular device can be accessed and executed even for applications running under DOS extenders. It is noted that, in the exemplary embodiment, the present invention relies on the presence of a memory manager, or an equivalent thereof, to provide for a primary protected-mode operating  
25 environment including the system IDT and system GDT.

Figure 5 is a block diagram illustrating the functional relationship between conventional operating system components in a typical MS-DOS environment as described in the Background section with reference to  
30 Figures 2 through 4 and is an exemplary embodiment of the present invention.

As shown in Figure 5, the present invention functionally represents a new functional layer working in conjunction with the protected-mode operating system 310.  
35 This new layer is referred to, for purposes of this specification, as VIVO driver 510. Essentially, the VIVO driver 510 becomes an extension of the protected-mode

- 13 -

operating system that supervises MS-DOS and DOS extenders instead of simply becoming an extension of MS-DOS itself, as is the case with standard device drivers and TSRs. In the exemplary embodiment of the present invention, in addition  
5 to VIVO driver 510 which represents a driver designed to provide the device virtualization services, a VIVO TSR 520 is provided to aid in the dynamic extension of the services by the VIVO driver 510 for use with DOS extenders 410.

The present invention includes loading protected-  
10 mode executable code, including an interrupt service routine and device virtualization code, into memory, and entering the associated interrupt service vector directly into the protected-mode operating system's interrupt descriptor table (IDT) 318. The use of IDTs is well known and additional  
15 details of descriptor addressing are described beginning on page 41 of the Windows '95 reference incorporated herein. Additional teachings on the use of IDTs can be found in *Microprocessors*, Intel (1989), which is also herein incorporated by reference. Briefly, the protected-mode IDT  
20 318 determines interrupt vectoring instead of the DOS Interrupt Vector Table 213 even when the protected-mode operating system 310 is running real-mode code. In many cases, such as MS-DOS operating system calls, the services indicated by the IDT entries in IDT 318 simply pass control  
25 to the real-mode services indicated by the DOS interrupt vector table that were installed by MS-DOS. As well as being faster and more efficient than real-mode interrupt handlers, using the protected-mode IDT 318 makes the services of the present invention unconditionally available  
30 to the system whether it is running in real- or protected-mode.

The present invention, by way of the VIVO TSR 520, uses the VCPI 'Get Protected-mode Interface' real-mode call  
— (Int 67h, function de01h) or the VCPI 'Switch to Protected  
35 Mode' real-mode call (Int 67h, function de0ch) to intercept VCPI calls to patch the DOS extender's IDT. Initially, the strategy was to force all of the DOS extender's 410

- 14 -

subsequent VCPI 314 protected-mode "far calls" to "pass through" the VIVO driver 510, where the "Get Protected-mode Interface" was used by a DOS extender 410 at startup to acquire a protected-mode context. When the VIVO driver 510  
5 intercepted these far calls, it was running under the context of the DOS extender's protected-mode operating system (IDT 418, GDT 420). At this point, the VIVO driver 510 installed its interrupt service vector into the DOS extender's IDT 418 making the VIVO driver's device  
10 virtualization service available to the DOS extender 410 (and its applications) until it terminates.

However, in accordance with a presently preferred embodiment of the invention, the strategy for making the actual patch entry into the DOS extender's IDT 418 is  
15 changed. Rather than patching the DOS extender's IDT 418 during any VCPI far call intercept, the patch is now performed at the intercept of the VCPI 'Switch to Protected Mode' call (Int 67h, function de0ch). In this fashion, application programs running under DOS extenders are  
20 prevented from generating I/O related interrupts after the switch to protected mode but before any VCPI far calls are made.

Although the present invention is designed to operate using most any interrupt request, the exemplary  
25 embodiment of the present invention uses the non-maskable interrupt (NMI) as the interrupt request for triggering the device virtualization routine. It is noted that, historically, the NMI has been used by system motherboard logic to notify the operating system of a RAM (memory)  
30 parity error, or by I/O devices to notify the operating system of some "unrecoverable" error. Today, however, the RAM parity no longer exists and I/O devices do not implement NMI generation. A typical DOS extender's NMI handler, however, not knowing specifically how to handle such an  
35 event, simply re-boots the system rather than "passing-down" the interrupt to the currently installed DOS handler as it would do with a normal interrupt. Therefore, unlike other

- 15 -

interrupt services, an NMI interrupt service routine installed under DOS would most likely be ignored by an application running under a DOS extender.

#### Description of Exemplary Embodiments

5           Although illustrated and described below with reference to certain specific embodiments, the present invention is nevertheless not intended to be limited to the details shown. Rather, various modifications may be made in the details within the scope and range of equivalents of the  
10 claims and without departing from the spirit of the invention.

          During operation of the embodiment of Figure 5, when an interrupt request 311 (e.g., NMI) occurs, the protected-mode IDT 318 directs the flow of operation to the  
15 appropriate service routine based on the entries therein. If the interrupt is not intended for the VIVO driver 510, then the interrupt is passed on to the normal flow of operation.

          However, when the VIVO driver 510 of the present  
20 invention is present with a DOS extender 410 running, the interrupt request is not passed directly to the DOS extender 410. Rather, if the interrupt request is intended for the VIVO driver 510, the VIVO driver 510 acts on the request directly. If the request is not for the VIVO driver 510,  
25 then control is passed to the DOS extender 410, and the DOS extender 410 handles it in its normal way. It is noted that, in the exemplary embodiment of the present invention, because the NMI is used, the device virtualization can be performed immediately following the "faulting" instruction  
30 (i.e., the instruction which caused the NMI).

          Turning to the generation and installation of the present invention, after the computer code embodying the present invention is written, it is compiled/assembled and linked, in the exemplary embodiment, as zero address-based,  
35 non-relocatable, flat-model, 32-bit protected-mode code. The computer code embodying the present invention is then

- 16 -

saved as a standalone binary file. It is noted that, in preparing the computer code embodying the present invention, protected-mode code is required (at least at the NMI service entry point) since the protected mode IDT's vectoring  
5 mechanism does not allow vectoring to real-mode (or virtual 8086) code. It is also noted that, although some real-mode code is required, the exemplary embodiment of the present invention is implemented using almost all protected-mode code since it is more efficient for vectoring and execution  
10 and can be completely located in extended memory, thereby avoiding memory-hungry DOS real-mode applications.

Basically, the VIVO driver 510 includes the device virtualization code for emulating the particular device and it includes the code necessary to receive, at run time, the  
15 re-directed "far calls" and "Switch to Protected Mode" calls from the DOS extender 410, to make the appropriate entries in the IDT 418, and to pass control on to the VCPI 314. It also includes the Int 67h handler which is used to reflect the VCPI "Get Protected-Mode Interface" call return or the  
20 VCPI "Switch to Protected Mode" call return into the VIVO TSR 520. An exemplary implementation of a VIVO driver 510 which intercepts a "Switch to Protected Mode" call (Int 67h, function de0ch) and a "Get Protected Mode Interface" call (Int 67h, function de01h) in accordance with a presently  
25 preferred embodiment of the present invention is included as Appendix A. An exemplary implementation of a VIVO driver 510 which intercepts only the "Get Protected Mode Interface" call (Int 67h, function de01h) is included as Appendix A to the parent application, U.S. Patent Application Serial No.  
30 08/712,363, the contents of which are hereby incorporated by reference.

The installation and operation of the present invention is described with reference to the flowcharts in Figures 6-8. As shown in Figure 6, at boot-time, in the  
35 exemplary embodiment of the present invention, an MS-DOS initialization program (e.g., ssinit.com) allocates a predetermined amount of the extended memory area 114 above

- 17 -

the HMA 116 using an extended memory (XMS) interface reference, at step 610. An exemplary implementation of ssinit.com suitable for use with the present invention is included as Appendix B. The predetermined amount of memory, 5 in the exemplary embodiment of the present invention, is the size of the 32-bit protected-mode code file. Additionally, in the exemplary embodiment, the allocated memory is below the 4 Megabyte boundary. Then, the allocated memory, using the XMS interface, is locked and the physical address is 10 saved.

Subsequently, the code embodying the present invention is copied into the allocated portion of extended memory, at step 612. Appropriate entries are made into the protected-mode system IDT 318 and system GDT 320 to allow 15 the associated hardware or software interrupt to vector directly to the 32-bit service entry point(s) in extended memory, at step 614. It is noted that since the interrupt vectoring is done at the protected-mode level, the 32-bit services are always available and can be initiated by the 20 protected-mode operating system 310 without explicitly performing any time-consuming mode switching.

More specifically, steps 612 and 614 are accomplished as follows:

The protected-mode code file embodying the present 25 invention is opened and a 1 k-byte portion of the code is loaded into local memory. In the exemplary embodiment of the present invention, this first portion of the code is loaded because it has variables that need to be initialized at predetermined offsets which can only be determined at 30 this stage of loading the program (e.g., configuration parameters).

Next, the VCPI "Switch to Protected Mode" call (Int 67h handler, function de0ch) and the VCPI "Get Protected Mode-Interface" call (Int 67h, function de01h) is 35 invoked. Three selectors and an entry point offset for the "Get Protected Mode Interface" call are returned. The three selectors and the entry point offset are copied into a

- 18 -

predetermined offset in the first portion of the protected-mode code. Also, the segment and offset of a portion of the MS-DOS initialization code is copied into a predetermined offset in the first portion of the protected-mode code.

5 This referenced portion of the MS-DOS initialization code remains resident after the MS-DOS initialization code terminates and the protected-mode code, in the exemplary embodiment, will need to know where it is because it is essentially a shared dataspace used by the VIVO TSR 520 and  
10 the VIVO driver 510 to communicate.

Next, the first portion of the protected-mode code is copied into the allocated extended memory (e.g., using an XMS interface) and then the rest of the protected-mode code embodying the present invention is copied into extended  
15 memory in the same manner.

Next, the linear addresses for the protected-mode system IDT 318 and system GDT 320 and the physical address for the Page Directory (using standard 386 instructions) are obtained and saved. A protected-mode initialization program  
20 (e.g., a DOS4GW executable) is spawned and the physical address of the allocated Extended Memory, GDT and IDT linear addresses, as well as the Page Directory physical address, are passed thereto. An exemplary implementation of the DOS4GW executable suitable for use with the present  
25 invention is included as Appendix C.

The functions of the protected-mode initialization program, in the exemplary embodiment of loading the present invention, are to:

1) Make three entries at the top of the  
30 protected mode operating system's GDT 320. The first entry is a 32-bit code selector with a linear address based at the beginning of the allocated Extended Memory. The second entry is a data selector to alias the first entry. The third entry is a 32-bit data selector that is based at  
35 linear address 0 and has a maximum size (or limit).

2) Save the selector base of the entries made in step 1.

- 19 -

3) Make an entry into the protected mode operating system's IDT 318 for vector 02h (the NMI vector). This vector uses the selector base saved above with an offset of zero (in the exemplary embodiment, the NMI entry point in the 32-bit code).

4) Save the original Int 67h handler vector.

5) Make an entry into the protected mode operating system's IDT 318 for vector 67h (the Int 67h vector). This vector uses the selector base saved above with an offset of eight (the Int 67h handler intercept entry point in the 32-bit code).

6) Then, return control to the MS-DOS initialization program (Appendix B).

Finally, the MS-DOS initialization program terminates, leaving a relatively small program in memory -- referred to above as the VIVO TSR 520. The general technique of leaving a TSR in memory upon initialization program termination is a well known technique to those of ordinary skill in the art.

By way of the Int 67h handler entry, the VIVO driver 510 is linked into the VCPI service/control chain via the IDT 318 for Interrupt 67h so that the hooks are present for the present invention to extend its functionality to DOS extenders 410 when they initialize. It is noted that Interrupt 67h is a control function interface to the EMS 118 and VCPI 314. This Interrupt 67h handler (VIVO driver 510) and VIVO TSR 520 act upon VCPI functions, and then pass control to the normal Interrupt 67h handler installed by the protected-mode operating system.

At this point, the protected-mode operating system 310 is configured such that hardware virtualization is available to all real-mode programs and drivers. There are also now hooks in place to allow for the extension of the device virtualization service to applications running under DOS extenders. It is noted that, in the exemplary embodiment of the present invention, although the hooks are put in place during boot time, the extension of the device

- 20 -

virtualization services to applications running under DOS extenders is completed at run-time. This is an important aspect of the present invention because it allows the present invention to avoid many of the drawbacks of the prior art techniques.

It is noted that, although the above-described initialization process is performed using a combination of the MS DOS initialization program and the protected-mode initialization program, in an alternate embodiment, all of the initialization functions performed by the MS DOS initialization program can be performed by the protected-mode initialization program. To do so, the MS DOS initialization program (e.g., Appendix B) needs to pass an extra parameter to the protected-mode initialization program. The extra parameter is the real-mode address of the shared data space within the DOS initialization program.

The way in which the VIVO code of the present invention extends its functionality to DOS extenders via the Interrupt 67h handler is described with reference to the flowcharts of Figures 7 and 8.

In a first embodiment of the invention, as shown in Figure 7, after having established the VIVO TSR 520, it is triggered when, at run time, the DOS extender 410 calls the VCPI "Get Protected-Mode Interface" function, at step 712, via Int 67h. At this point, the DOS extender 410, initially in real-mode, expects to acquire the protected-mode far-call entry point to the VCPI 314. This entry point is used by the protected-mode operating system created by the DOS extender 410 to communicate directly with the VCPI 314 without invoking software interrupts and without switching to real mode. However, the VIVO TSR 520 of the present invention, having been passed control indirectly, by the VIVO driver 510, at this point gives the DOS extender 410 an entry point to the VIVO driver 510, at step 714. It is noted that, in this embodiment of the present invention, the VIVO TSR 520 relies on the presence of a VCPI 314, or equivalent thereof, for cooperation with DOS extenders 410.

- 21 -

By providing DOS extender 410 with an entry point into the VIVO driver 510 rather than the actual VCPI entry point, the DOS extender 410 will now pass through the VIVO driver 510 on subsequent "far calls." When the DOS extender 410 makes these VCPI "far calls," the system is in the DOS extender's IDT/GDT protected mode context. As such, when the VIVO driver 510 intercepts the VCPI far-calls, it makes its own interrupt vector entries into the DOS extender's protected-mode operating system IDT 418, at step 716, similar to that which was done for the native protected-mode operating system 310. After making the appropriate entries, the VIVO driver 510 then passes control to the actual VCPI 314 via the previously saved VCPI protected-mode far-call entry point, at step 718.

More specifically, steps 714, 716 and 718 are accomplished as follows:

The VIVO driver 510 intercepts the Get Protected-Mode Interface call at the Int 67h entry point (all other Int 67h calls are passed through to the default handler). The VIVO driver 510 saves the real-mode return address for the DOS extender 410 into the shared data space. It then changes the real-mode return address (stored on the processor stack) so that, when the actual VCPI service completes, control will pass to the VIVO TSR 520. So, essentially, all Int 67h calls still get processed by the default handler except a "Get Protected-Mode Interface" call causes the change of the real-mode return address, by the VIVO driver 510, prior to being processed by the default handler.

It is noted that, in an alternate embodiment, the function of intercepting the initial Int 67h call from the DOS extender 410 may be performed by VIVO TSR 520. This may be problematic, however, because when the present invention runs under a memory manager, such as QEMM by Quarterdeck Office Systems, the memory manager does not pass the VCPI Int 67h calls through the DOS Interrupt Vector Table, but rather, fields all VCPI Int 67h calls in protected mode via

- 22 -

the IDT 318.

As shown in Figure 7, in the case of the "Get Protected-Mode Interface" call, control is then passed to the VCPI 314 which performs its service. The VCPI 314  
5 returns control, via the new return address, to the VIVO TSR 520. At this point, a page table context has been setup in the DOS extender's data space. The VIVO TSR 520 then makes additional page entries so that the VIVO driver 510 is valid within the DOS extender's protected-mode context. The VIVO  
10 TSR 520 then copies the three selectors being passed back to the DOS extender 410 into the shared data space as well as the VCPI far call entry offset. Next, the VIVO TSR 520 copies its own three selectors (described above) into the DOS extender's return data space. It then alters the VCPI  
15 entry offset (in register ebx) to 16, which is the offset into the VIVO driver 510 for the VCPI far can intercept. Finally, it returns control to the original real-mode return address (the DOS extender 410) saved above in the shared data space.

20 At this point, all VCPI far calls made by the DOS extender 410 now pass control to the VIVO driver 510 within the context of the DOS extender's new protected-mode operating system. These calls include allocating extended memory for the DOS extender application and (temporarily)  
25 switching back to real-mode to service DOS interrupts and DOS operating system calls. Whenever a VCPI far call is made, an interrupt entry is made in IDT 418 by VIVO driver 510.

With this completed, device virtualization (e.g.,  
30 hardware virtualization) services are available to the DOS extender's protected-mode application program as well as to the normal DOS real-mode programs (i.e., VIVO driver 510 is accessible by programs running under DOS extender), at step 720.

35 In a presently preferred embodiment of the invention, the strategy for making the actual patch entry into the DOS extender's IDT 418 is changed from that just

- 23 -

described with respect to Figure 7. Instead of patching the DOS extender's IDT 418 during any VCPI far call intercepts, the patch is instead performed at the intercept of the VCPI "Switch to Protected Mode" call (Int 67h, function de0ch).

- 5 In the Figure 7 embodiment, the VIVO code always intercepts Int 67h calls to monitor VCPI startup activity by intercepting the "Get Protected Mode Interface" call and passing all other calls directly to the default VCPI handler. In accordance with the presently preferred
- 10 embodiment (Figure 8), however, the VIVO code also watches for the "Switch to Protected Mode" call. If this call is made, the DOS extender IDT 418 is patched then, and control is passed to the default VCPI handler.

- In the Figure 7 embodiment, the DOS extender's IDT
- 15 418 was patched during VCPI far calls since it was known that the DOS extender's protected mode context would be invoked at the time of the call. Unfortunately, the inventor has found that, under some circumstances, the DOS extender's application can execute code after the switch to
- 20 protected mode but before any VCPI far calls are made. As a result, the DOS extender's application could generate an I/O related interrupt event before the VIVO code makes its dynamic DOS extender IDT patch in accordance with the invention. Accordingly, in accordance with the embodiment
- 25 of Figure 8, the VIVO code makes its dynamic DOS extender IDT patch before the first switch to protected mode.

- It will be appreciated by those skilled in the art that the DOS extender must make a "Switch to Protected Mode" call at least once before any of the DOS extender's
- 30 application code runs. When the DOS extender makes this call, it is executing in virtual 8086 mode and under the system's protected mode context (IDT 318, GDT 320). To make the switch to the DOS extender's protected mode, the DOS extender calls the VCPI interface via Int 67h (function
- 35 de0ch), at step 812, and provides the VCPI interface with a list of parameters that indicate what the DOS extender's protected mode context is to be and where to begin executing

- 24 -

protected mode code under the DOS extender's protected mode context, at step 814. More specifically, the DOS extender provides to the VCPI its Page Directory address, GDT and IDT addresses, LDT address, TSS (Task State Segment), and  
5 protected mode program execution address. This is all the information that the VIVO Int 67h intercept code needs to be able to successfully patch the DOS extender's IDT 418 at step 816 before it ever gets into protected mode. The real VCPI switch handler is only given control at step 818 after  
10 the VIVO Int 67h intercept code is sure that the DOS extender's IDT is properly patched. With this completed, device virtualization (e.g., hardware virtualization) services are available to the DOS extender's protected-mode application program as well as to the normal DOS real-mode  
15 programs (i.e., VIVO driver 510 is accessible by programs running under DOS extender), at step 820.

In the embodiment of Figure 8, because the DOS extender is asking the VCPI to apply a new protected mode context, the DOS extender must tell the VCPI what that  
20 context is. Accordingly, it passes the VCPI (among others) at least the following: physical address of the Page Directory, linear address and size of the DOS extender's GDT and the DOS extender's IDT, and the like, at step 814. These arguments tell the VIVO driver of the invention where  
25 the DOS extender's GDT and IDT are. By temporarily switching the processor's Page Directory at step 816, the VIVO driver can access the DOS extender's IDT and patch it with the appropriate vector to the stored emulation code.

In particular, the VIVO driver of the Figure 8  
30 embodiment performs the following steps at step 816 to patch the DOS extender's IDT. Once the VIVO driver intercepts Int 67h, function de0ch (switch to protected mode), the VIVO driver then switches the processor's page directory to that of the DOS extender, which was specified by the DOS extender  
35 in the VCPI call. This allows the VIVO driver to properly access the DOS extender's GDT and IDT at run-time. The VIVO driver then checks to see if its IDT entries have already

- 25 -

been made into the DOS extender's IDT. If so, it checks to see if the selector entry in the DOS extender's IDT indicates the appropriate entry in the DOS extender's GDT, which is the GDT entry that gets installed into the DOS  
5 extender's GDT when the VCPI get protected mode interface is called by the DOS extender. If either the DOS extender's IDT entry does not exist, or the selector does not match the DOS extender's GDT entry, the VIVO driver's code searches the DOS extender's GDT to find out what selector value  
10 corresponds to the VIVO emulation code and then makes the appropriate DOS extender IDT entry using the selector value. The VIVO driver then switches the processor page directory back to that of the system's protected mode context and jumps to the real VCPI switch call (step 818). The patched  
15 DOS extender IDT may now be used at step 820 to emulate the device that caused the interrupt to be generated.

Thus, in the embodiments of Figures 7 and 8, the startup of a DOS extender is dynamically detected by monitoring the VCPI calls and dynamically patching the DOS  
20 extender's IDT when such startup is detected.

In accordance with the embodiment of Figure 8 (Appendix A), the VIVO driver continues to receive the VCPI far calls even though it does not patch the DOS extender's IDT 418 at the time of the far call. This is necessary  
25 because the DOS extender gets the selectors (GDT entries) when the DOS extender makes the VCPI "Get Protected Mode Interface" call. A far call is still necessary so that the selectors are guaranteed a "home" in the DOS extender's GDT 420. If the selectors could not be placed in the DOS  
30 extender's GDT 420, the DOS extender's application could never vector to the stored device emulation code since these selectors are the protected mode "pointers" to the device emulation code. Since the DOS extender is given these entries during the "Get Protected Mode Interface" call, the  
35 DOS extender cannot be prevented from calling the VIVO driver when it thinks it is making VCPI far calls. Hence, in the preferred embodiment, the VIVO TSR 520 monitors both

- 26 -

the "Switch to Protected Mode" and "Get Protected-Mode Interface" calls.

The VIVO driver 510 of the present invention, like other device drivers and TSRs, implements software services for hardware interrupt events. However, the VIVO driver 510 in accordance with the present invention is different than standard MS-DOS device drivers and TSRs. For example, the memory-resident, executable code of the VIVO driver 510 of the present invention can permanently reside above the 1 MB memory boundary and above the HMA 116. As such, the VIVO driver 510 does not compete for valuable memory space with standard MS-DOS programs and other device drivers and TSRs. Moreover, the VIVO driver 510 is not limited to the 64K restriction of a typical device driver allowing for applications significantly larger than 64K which is particularly useful when, for example, one desires to emulate hardware with software.

#### Commercial Embodiment

A commercial embodiment in accordance with the present invention is the Ensoniq® Soundscape™ sound card VIVO drivers. In this commercial embodiment, a VIVO driver is used to perform the function of hardware which previously existed on a sound card. By replacing the hardware with a VIVO driver, the space consumed and cost of the sound card are significantly reduced. In operation, when an application requests access to the sound card, the request is directly processed by the VIVO driver and the functionality of that hardware element is performed in software rather than hardware. This is possible, in part, because present generation microprocessors (e.g., Pentium) are so powerful that they typically have considerable idle time which can be used to execute the VIVO driver, which appears like an application, without a noticeable delay in other necessary processing. This is only one example of how the use of a VIVO driver provides substantial advantages to not only optimizing conventional memory space but also

- 27 -

optimizing the size and cost of an auxiliary computer card.

In particular, in the commercial embodiment, if an application attempts to address the sound card in the processor I/O address space, normally 220h through 22fh, an NMI is generated. As a result, the VIVO driver performs functional emulation of various hardware previously residing on the card (e.g., the Sound Blaster) in response to I/O writes and, during certain I/O reads, the handler alters the hardware I/O return value (in the Intel 386, register EAX) in order to emulate or virtualize the presence of the hardware in the system. Since the commercial embodiment of the present invention optionally alters the processor register state, it is necessary that the NMI service routine execute immediately following the faulting I/O instruction.

Although illustrated and described above with reference to certain specific embodiments, the present invention is nevertheless not intended to be limited to the details shown. Rather, various modifications may be made in the details within the scope and range of equivalents of the claims and without departing from the spirit of the invention. For example, the invention may be triggered by hardware or software interrupts.

-28-

APPENDIX A

©1997 Ensoniq

```

; This module contains the I/O virtualization handlers for both
; DOS and Win environments.
; Define WIN_CODE to build for Win/Win95 environment.
; Also optionally included in this module are virtual PIC and DMA
; handlers for DOS.

.586p
IFDEF WIN_CODE
    INCLUDE vmm.inc
    INCLUDE debug.inc
    INCLUDE vpica.inc
    INCLUDE vdmad.inc
    INCLUDE sndscape.inc

    EXTERN gpSSI: DWORD
    EXTERN HARDWARE_PhysMemWrite: NEAR
    EXTERN DisableBusMaster: NEAR
    EXTERN EnableBusMaster: NEAR

    PUBLIC ActiveCount
    PUBLIC NMIService
    PUBLIC IRQService
    PUBLIC PicFlags
    PUBLIC DmaFlags
    PUBLIC DacFlags
    PUBLIC SblFlags
    PUBLIC MpuFlags
    PUBLIC SblStereo
    PUBLIC SblTC
ELSE
    .MODEL flat
IFDEF DOS_DEBUG
    PUBLIC DbPut8
    PUBLIC DbPut16
    PUBLIC DbPut32
ENDIF
ENDIF

    INCLUDE conc.inc
    INCLUDE iohandlers.inc

    EXTERN _synth_init: NEAR
    EXTERN _synth_process_MIDI: NEAR
    EXTERN _synth_all_notes_off: NEAR
    EXTERN _synth_set_MT32: NEAR
    EXTERN _fm_process: NEAR
    EXTERN _synth_update: NEAR
    EXTERN _synth_reinit_voices: NEAR
    EXTERN _MT32: BYTE
    EXTERN _num_active_voices: BYTE
    EXTERN _fm_array: BYTE

IFDEF WIN_CODE
    _TEXT SEGMENT
    ASSUME fs:NOTHING

    ELSE
VxD_LOCKED_CODE_SEG
ENDIF

IFDEF WIN_CODE
    ; NMI entry point here - jump over the hardware config and stub data
    ; DO NOT insert any code or data before this, dammit.
    jmp NMISercie

    ALIGN 4
    ; Int 67h entry point here - skip to its service

```

-29-

```

        jmp     INT67Service

        ALIGN 4
        ; VCPI entry point here - skip to its service
        jmp VcpiService

        ALIGN 4
        jmp DebugService

        ; VCPI and hardware config data here . . . all other data at end
        ALIGN 4
        PUBLIC _programmap_map_ptr
        _programmap_map_ptr DD ?
        PUBLIC _drummap_map_ptr
        _drummap_map_ptr DD ?
        PUBLIC _program_map_array_ptr
        _program_map_array_ptr DD ?
        PUBLIC _drummap_array_ptr
        _drummap_array_ptr DD ?
        PUBLIC _program_array_ptr
        _program_array_ptr DD ?
        PUBLIC _ws_array_ptr
        _ws_array_ptr DD ?
        PUBLIC _category_array_ptr
        _category_array_ptr DD ?
        PUBLIC _checksum_array_ptr
        _checksum_array_ptr DD ?
        PUBLIC _wave_desc_index_array_ptr
        _wave_desc_index_array_ptr DD ?
        PUBLIC _wave_descriptor_array_ptr
        _wave_descriptor_array_ptr DD ?
        PUBLIC _WaveData_ptr
        _WaveData_ptr DD ?

        DirectAccess DD ?
        PCIIRZVectoff DD ?
        EMMPageDir DD ?
        XMSPaddrLo DD ?
        PT1GPtr DD ?
        ConcGentries DD 6 DUP(?)
        VcpiGentries DD 6 DUP(?)
        PsharedData DD ?
        V86Gpmi LABEL QWORD
        Vgoffset DD ?
        VGSegment DD ?
        V86Fix LABEL QWORD
        VFoffset DD ?
        VFSegment DD ?
        Int67Link DF ?
        DebugLink DF ?
        VcpiEntry LABEL FWORD
        VEoffset DD ?
        VEselector DW ?

        ;-----do not separate these sections-----
        HWConfig HW-CONFIG < OFFSET SynthBuffer, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?,
        ?, ?, ?, ?, ? >
        ;-----do not separate these sections-----
        WaveIRQMask DB ?
        WaveIRQVector DB ?
        WaveSpecEOI DB ?
        ENDIF

        ; the NMI ISR front-end/back-end code . . .
        NMIService:
        push ecx ;save regs, setup ds and dfg ptr
        push ds
        mov ecx, cs
        add ecx, 08h
        mov ds, ecx
        push ebx

```

-30-

```

    push    edx
    push    esi
    mov     ecx, eax
    mov     EaxSave, eax
    mov     esi, gpSSI
SAVE_FRAME EQU 20

    ; Read the NMI-status port. The format of this WORD register is:
    ; NULL BITS    DEVICE    ADDR OFFSET    W/~R    INT STATUS
    ; 15 14 13 12 11 10 09 08 07 06 05 04 03 02 01 00
    ; 1 1 1 1 1 D2 D1 D0 A4 A3 A2 A1 A0 W 0 ~I
    ; where Dx is the device encode, Ax is address offset,
    ; w is the write access flag, and ~I is the inverted NMI status flag.
    ;
    mov     dx, [esi.ssi_wIOAddressConcert]
    add     dl, CONC_WNMISTAT_OFF    ; read the status register
call DisableBusMaster
    in     ax, dx
call EnableBusMaster
    test    al, 01h                ; test for our NMI
    jnz     SHORT NMIExit          ; if none, bail
    ;
    mov     edx, eax                ; copy status reg
    shr     eax, 6                  ; shift-down dev encode bits
    and     edx, 0000007fh          ; mask-off non address/W bits
    and     eax, 0000001ch          ; mask-off non dev encode bits
    mov     eax, DevTable[eax]      ; get the device table base
    jmp     DWORD PTR [eax+edx]     ; jump to the appropriate service
NMIExit:
    mov     dx, [esi.ssi_wIOAddressConcert]
    add     dl, CONC_WNMISTAT_OFF    ; clear our NMI assertion
    out     dx, al
    ;
    in     al, 61h                  ; reset system NMI latch
    and     al, 0fh
    or      al, 0ch
    out     61h, al
    and     al, 03h
    out     61h, al

    mov     eax, EaxSave            ; restore regs
    pop     esi
    pop     edx
    pop     ebx
    pop     ds
    pop     ecx
    iretd

MpuDataR LABEL NEAR

    mov     al, MpuData
    mov     BYTE PTR EaxSave, al
    btr     MpuFlags, MPU_FLAG_DPEND
    jc      SHORT mdrmo
    or      MpuStat, 80h
    jmp     NMIExit
mdrmo:
    mov     al, MpuTemp
    call    MpuPutData
    jmp     NMIExit

MpuDataW LABEL NEAR

    ;mov     ah, 0dh
    ;mov     al, cl
    ;call    DbPut16
    bt     MpuFlags, MPU_FLAG_DOUT
    jnc     mdwexit

    ; parse MIDI data here and accumulate a message

```

-31-

```

test    cl, 80h
jnz     mdwstat
cmp     BYTE PTR MidiMessage, 0f0h
jae     mdwexit

xor     edx, edx
mov     dl, MidiCurrC
mov     BYTE PTR MidiMessage[edx], cl
cmp     dl, MidiDataC
jb      SHORT mdwmore
mov     MidiCurrC, 01h

; At this point we have accumulated a full MIDI message . . .
; put it in eax and pass it to the synth. The format will be:
; eax:      d31-d24      d23-d16      d15-d08      d07-d00
; MIDI:     ZERO        DATA2       DATA1       STATUS

mov     ActiveCount, 400
bts     MpuFlags, MPU_FLAG_SYNTHON
jc      SHORT midcall
mov     _num_active_voices, 24
call    SynthOn
midcall:
mov     ecx, ds
mov     Ssoffset, esp
mov     Sselector, ss
mov     esp, OFFSET StackTop
mov     ss, ecx
push    es
mov     es, ecx
cld
push    MidiMessage
call    _synth_process_MIDI
add     esp, 4
pop     es
lss     esp, SpSave
jmp     NMIExit

mdwmore:
inc     dl
mov     MidiCurrC, dl
jmp     NMIExit

; got a MIDI status byte . . .
mdwstat:
cmp     cl, 0f0h
jae     SHORT mdwsyst
mov     BYTE PTR MidiMessage, cl
mov     MidiCurrC, 01h
mov     al, 02h
mov     dl, cl
and     dl, 0e0h
cmp     dl, 0c0h
jne     SHORT mdwncfx
dec     al
mdwncfx:
mov     MidiDataC, al
jmp     NMIExit
mdwsyst:
cmp     cl, 0f8h
jae     SHORT mdwexit
mov     BYTE PTR MidiMessage, cl
mdwexit:
jmp     NMIExit

MpuStatR LABEL NEAR

mov     al, MpuStat
mov     BYTE PTR EaxSave, al
jmp     NMIExit

```

-32-

```

MpuCmdW LABEL NEAR
;mov ah, 0ch
;mov al, cl
;call DbPut 16
    cmp cl, 0ffh
    jne SHORT mcwnrs
    or MpuStat, 80h
    btr MpuFlags, MPU_FLAG_DPEND
    btr MpuFlags, MPU_FLAG_DOUT
    btr MpuFlags, MPU_FLAG_UART
    jc SHORT mcwnak
    mov al, 0feh
    call MpuPutData
mcwnak:
    ; do synth shutdown stuff for MPU reset
    mov ecx, ds
    mov Ssoffset, esp
    mov Sselector, ss
    mov esp, OFFSET StackTop
    mov ss, ecx
    push es
    mov es, ecx
    cld
    push 0ffffffffh
    call _synth_all_notes_off
    add esp, 4
    mov ActiveCount, 0
    btr MpuFlags, MPU_FLAG_SYNTHON
    call SynthOff
    call _synth_reinit_voices
    pop es
    lss esp, SpSave
    jmp NMIExit
mcwnrs:
    bt MpuFlags, MPU_FLAG_UART
    jnc SHORT mcwint
    jmp NMIExit
mcwint:
    ; handle intelligent mode commands here - ack first
    mov al, 0feh
    call MpuPutData
    cmp cl, 3fh
    jne SHORT mcwver
    bts MpuFlags, MPU_FLAG_UART
mcwdoe:
    bts MpuFlags, MPU_FLAG_DOUT
    bts MpuFlags, MPU_FLAG_SYNTHON
    jc NMIExit
    mov num_active_voices, 20
    mov ActiveCount, 400
    call Synthon
    jmp NMIExit
mcwver:
    cmp cl, 0ach
    jne SHORT mcwrev
    mov MpuTemp, 15h
    bts MpuFlags, MPU_FLAG_DPEND
    jmp NMIExit
mcwrev:
    cmp cl, 0adh
    jne SHORT mcwdx
    mov MpuTemp, 01h
    bts MpuFlags, MPU_FLAG-DPEND
    jmp NMIExit
mcwdx:
    and cl, 0f0h
    cmp cl, 0d0h
    je mcwdoe
    jmp NMIExit

```

-33-

HostStatR LABEL NEAR

```
mov    BYTE PTR EaxSave,02h
jmp    NMIExit
```

OdAddrR LABEL NEAR

```
mov    al,OdAddr
mov    BYTE PTR-EaxSave,al
jmp    NMIExit
```

OdAddrW LABEL NEAR

```
and    cl,0fh
mov    OdAddr,cl
jmp    NMIExit
```

OdDataR LABEL NEAR

```
mov    al,OdAddr
odr03: cmp    al,03h
      jne    SHORT odr04
      mov    cl,[esi.ssi_OdieDMA]
      jmp    SHORT odrex
odr04: cmp    al,04h
      jne    SHORT odr06
      mov    cl,[esi.ssi_OdieINT]
      jmp    SHORT odrex
odr06: cmp    al,06h
      jne    SHORT odrxx
      mov    cl,OdieCDCfg
      jmp    SHORT odrex
odrxx: xor    cl,cl
odrex: mov    BYTE PTR EaxSave,cl
      jmp    NMIExit
```

OdDataW LABEL NEAR

```
mov    ah,OdAddr
odw03: cmp    ah,03h
      jne    SHORT odw04
      mov    [esi.ssi_OdieDMA],cl
      jmp    NMIExit
odw04: cmp    ah,04h
      jne    SHORT odw06
      mov    [esi.ssi_OdiINT],cl
      jmp    NMIExit
odw06: cmp    ah,06h
      jne    SHORT odwex
      mov    OdieCDCfg,cl
Odwex: jmp    NMIExit
```

AdAddrR LABEL NEAR

```
mov    al,AdAddr
mov    BYTE PTR EaxSave,al
jmp    NMIExit
```

AdAddrW LABEL NEAR

```
and    cl,7fh
```

-34-

```

        test    cl,40h
        jnz     SHORT aawms

aawmc:   ; mode change bit is clear
        test    AdAddr,40h
        mov     AdAddr,cl
        jz      NMIExit
        ; new mode change clear
        btr     DacFlags,DAC_FLAG_ADPEND
        jnc     NMIExit
        jmp     ADDACStart

aawms:   ; mode change bit is set
        test    AdAddr,40h
        mov     AdAddr,cl
        jnz     NMIExit
        ; new mode change enable
        IFNDEF WIN_CODE
        call    ClearPCIIRQ
        ENDIF
        call    DACStop
        test    AdPinCtl,02h
        jnz     NMIExit
        btr     DacFlags,DAC_FLAG_INTENA
        jmp     NMIExit

AdDataR LABEL NEAR
        mov     al,AdAddr
        and     al,0fh

adr06:   cmp     al,06h
        jne     SHORT adr07
        mov     cl,AdDACVolL
        jmp     SHORT adrex

adr07:   cmp     al,07h
        jne     SHORT adr08
        cmp     AdDACVolL,0aah
        jne     SHORT adrrc
        cmp     AdDACVolR,95h
        jne     SHORT adrrc
        bts     DmaFlags,DMA_FLAG_MASK

adrrc:   mov     cl,AdDACVolR
        jmp     SHORT adrex

adr08:   cmp     al,08h
        jne     SHORT adr09
        mov     cl,AdFormat
        jmp     SHORT adrex

adr09:   cmp     al,09h
        jne     SHORT adr0a
        mov     cl,AdConfig
        jmp     SHORT adrex

adr0a:   cmp     al,0ah
        jne     SHORT adrxx
        mov     cl,AdPinCtl
        jmp     SHORT adrex

adrxx:   xor     cl,cl

adrex:   mov     BYTE PTR EaxSave,cl
        jmp     NMIExit

AdDataW LABEL NEAR
        mov     al,AdAddr

```

-35-

```

        and     al,0fh
adw02:   cmp     al,02h
        jne     SHORT adw03
        mov     AdCDVoll,c1
        mov     al,c1
        shl     al,2
        not     al
        and     al,7fh
        call    SetCDVol
        jmp     NMIExit
adw03:   cmp     al,03h
        jne     SHORT adw06
        mov     AdCDVolR,c1
        jmp     NMIExit
adw06:   cmp     al,06h
        jne     SHORT adw07
        and     cl,0bfh
        mov     AdDACVoll,c1
        mov     al,c1
        and     al,80h
        shl     cl,1
        not     cl
        and     cl,7fh
        or      al,cl
        call    SetDACVol
        jmp     NMIExit
adw07:   cmp     al,07h
        jne     SHORT adw08
        and     cl,0bfh
        mov     AdDACVolR,c1
        jmp     NMIExit
adw08:   cmp     al,08h
        jne     SHORT adw09
        test    AdAddr,40h
        jz      NMIExit
        call    DACStop
        mov     AdFormat,c1
        mov     SblTC,0ffh
        and     [esi.ssi_bSerFmt],0f3h
        test    cl,10h
        jz      SHORT adwfns
        or      [esi.ssi_bSerFmt],04h
adwfns:  test    cl,40h
        jz      SHORT adwfnb
        or      [esi.ssi_bSerFmt],08h
adwfnb:  mov     dx,[esi.ssi_wIOAddressConcert]
        add     dl,CONC_bSERFMT_OFF
        mov     al,[esi.ssi_bSerFmt]
        out     dx,al
        ;
        xor     edx,edx
        mov     dl,cl
        and     dl,0fh
        shl     edx,1
        mov     ax,AdFreqTable[edx]
        call    DACSetRate
        jmp     NMIExit
adw09:   cmp     al,09h
        jne     adw0a
        test    AdAddr,40h
        jnz     adwcm
        ;

```

-36-

```

        and     AdConfig,0fch
        and     cl,03h
        or      AdConfig,cl
        test    cl,01h
        jnz     SHORT adwcon
        call    DACPause
        jmp     NMIExit
adwcon:
        bt      DacFlags,DAC_FLAG_RUNNING
        jc      NMIExit
        bt      DacFlags,DAC_FLAG_PAUSE
        jc      SHORT adwcre
ADDACStart:
        bts     DacFlags,DAC_FLAG_AUTO
        xor     eax,eax
        mov     ax,DACCount
        inc     eax
        test    {esi.ssi_bSerFmt},04h
        jz      SHORT adwnob
        shl     eax,1
adwnos:
        test    {esi.ssi_bSerFmt},08h
        jz      SHORT adwnob
        shl     eax,1
adwnob:
        dec     eax
        mov     DACCount,ax
        call    DACStart
        jmp     NMIExit
adwcre:
        call    DACResume
        jmp     NMIExit
adwcm:
        mov     AdConfig,cl
        test    cl,01h
        jz      NMIExit
        bts     DacFlags,DAC_FLAG-ADPEND
        ;
IFDEF WIN_CODE
        push    ebx
        mov     bl,01h
        call    DebugCtl
        pop     ebx
ENDIF
        jmp     NMIExit
adw0a:
        cmp     al,0ah
        jne     SHORT adw0e
        mov     AdPinCtl,cl
        btr     DacFlags,DAC_FLAG_INTENA
        test    cl,02h
        jz      NMIExit
        bts     DacFlags,DAC-FLAG-INTENA
adw0e:
        cmp     al,0eh
        jne     SHORT adw0f
        mov     BYTE PTR DACCount+1,cl
        jmp     NMIExit
adw0f:
        cmp     al,0fh
        jne     NMIExit
        mov     BYTE PTR DaCCount,cl
        jmp     NMIExit

AdStatusR LABEL NEAR

        xor     al,al
        bt      PicFlags,PIC_FLAG-VIRQ
        jnc     SHORT asrni
        or      al,01h

```

-37-

```

asrni:
        mov     BYTE PTR EaxSave, al
        jmp     NMIExit

AdStatusW LABEL NEAR

IFDEF WIN_CODE
        call    KillVIRQ
ELSE
        call    VirtIRQClear
ENDIF
        jmp     NMIExit

SblMixAddrW LABEL NEAR
        mov     SblMixAddr, cl
        jmp     NMIExit

SblMixDataR LABEL NEAR
        mov     al, SblMixAddr
        cmp     al, 30h
        jae     SHORT smdrx
        shr     eax, 1
        and     eax, 0000001fh
        mov     al, SblMixer[eax]
        mov     BYTE PTR EaxSave, al
        jmp     NMIExit
; get current mixer address
; check for out of bounds
; if too high, return NULL value
; shift out alias bit
; mask off garbage
; get mixer data byte
; and return it

smdrx:
        mov     BYTE PTR EaxSave, 0ffh
        jmp     NMIExit
; return NULL

SblMixDataW LABEL NEAR
; mov ah, SblMixAddr
; mov al, cl
; call DbPut16
        mov     al, SblMixAddr
        cmp     al, 30h
        jae     NMIExit
        shr     eax, 1
        and     eax, 0000001fh
        or      cl, 11h
        mov     edx, OFFSET SblMixer
        mov     [edx+eax], cl
; get current mixer address
; check for out of bounds
; if too high, do nothing
; shift-out alias bit
; mask-off garbage
; add-in fixed bits
; point to mixer data
; store mixer byte

        cmp     al, SBL_MIX_RESET
        jne     SHORT smdwse
        mov     al, 99h
        mov     [edx+SBL_MIX_MASTER], al
        mov     [edx+SBL_MIX_DAC], al
        mov     [edx+SBL_MIX_MID], al
        mov     al, 11h
        mov     [edx+SBL_MIX_MIC], al
        mov     [edx+SBL_MIX_SOURCE], al
        mov     [edx+SBL_MIX_CD], al
        mov     [edx+SBL_MIX_LINE], al
        mov     [edx+SBL_MIX_STEREO], al
        call    SblSetFormat
        call    SblSetDACVol
        call    SblSetSynthVol
        call    SblSetCDVol
        jmp     NMIExit

smdwse:
        cmp     al, SBL_MIX_STEREO
        jne     SHORT smdwda
        and     [esi.ssi_bSerFmt], 0f3h
        test    SblStereo, 02h
        jz      SHORT smste0
        or      [esi.ssi_bSerFmt], 04h

```

-38-

```

smste0:  mov     dx, [esi.ssi_wIOAddressConcert]
         add     dl, CONC_bSERFMT_OFF
         mov     al, [esi.ssi_bSerFmt]
         out     dx, al
         mov     ax, SblByteRate
         test    SblStereo, 02h
         jz      SHORT smstel
         shr     ax, 1

```

```

smstel:  call    DACSetRate
         jmp     NMIExit

```

```

smdwda:  cmp     al, SBL_MIX_DAC
         jne     SHORT smdwsy
         mov     al, cl
         call    SblSetDACVol
         jmp     NMIExit

```

```

smdwsy:  cmp     al, SBL_MIX_MIDI
         jne     SHORT smdwcd
         mov     al, cl
         call    SblSetSynthVol
         jmp     NMIExit

```

```

smdwcd:  cmp     al, SBL_MIX_CD
         jne     NMIExit
         mov     al, cl
         call    SblSetCDVol
         jmp     NMIExit

```

SblSetDACVol PROC

```

         mov     al, SblMixer + SBL_MIX_DAC
         shr     al, 3
         xor     al, 63h
         bt      SblFlags, SBL_FLAG_SPKRON
         rc      SHORT ssdnm
         or      al, 80h
ssdnm:   call    SetDACVol
         ret

```

SblSetDACVol ENDP

SblSetSynthVol PROC

```

         mov     al, SblMixer+SBL_MIX_MIDI
         shr     al, 3
         xor     al, 63h
         sub     al, 08h
         call    SetSynthVol
         ret

```

SblSetSynthVol ENDP

SblSetCDVol PROC

```

         mov     al, SblMixer + SBL_MIX_CD
         shr     al, 3
         xor     al, 63h
         call    SetCDVol
         ret

```

SblSetCDVol ENDP

SblSetFormat PROC

```

         and     [esi.ssi_bSerFmt], 0f3h
         test    SblStereo, 02h

```

-39-

```

        jz      SHORT ssfns0
        or      [esi.ssi_bSerFmt], 04h
ssfns0:
        mov     dx, [esi.ssi_wIOAddressConcert]
        add     dl, CONC_bSERFMT_OFF
        mov     al, (esi.ssi_bSerFmt)
        out     dx, al
        mov     ax, SblByteRate
        test    SblStereo, 02h
        jz      SHORT ssfns1
        shr     ax, 1
ssfns1:
        call    DACSetRate
        ret

SblSetFormat ENDP

SblResetW LABEL NEAR

; mov     ah, 06h
; mov     al, cl
; call    DbPut16
        test    cl, 01h
        jnz     SHORT sblres1
sblres0:
        mov     al, 0aah
        call    SblPutData
        jmp     NMIExit
sblres1:
        btr     sblFlags, SBL_FLAG_HISPEED
        jnc     SHORT sblres
        call    DACStop
        btr     DacFlags, DAC_FLAG_RUNNING
        jmp     NMIExit
sblres:
        mov     SblProc, OFFSET SblParse
        mov     SblFlags, 0000h

        call    SblSetDACVol

        bts     DmaFlags, DMA_FLAG_MASK
IFDEF WIN_CODE
        call    ClearPCIIRQ
        call    KillVIRQ
ELSE
        call    VirtIRQClear
ENDIF
        mov     DacFlags, 0000h OR (1SHL DAC_FLAG_INTENA)
        mov     SblTC, 0ffh
        mov     SblAccum, 0aah
        mov     SblXorPat, 96h
        call    DACStop
        mov     dx, [esi.ssi_wIOAddressConcert]
        add     dl, CONC_bSERCTL_OFF
        and     [esi.ssi_bSerCtl], NOT 50h
        or      [esi.ssi_bSerCtl], 02h
        mov     al, [esi.ssi_bSerCtl]
        out     dx, al
        add     dl, CONC_bSERFMT_OFF - CONC_bSERCTL_OFF
        and     [esi.ssi_bSerFmt], 0f3h
        test    SblStereo, 02h
        jz      SHORT srlnos
        or      [esi.ssi_bSerFmt], 04h
srlnos:
        mov     al, [esi.ssi_bSerFmt]
        out     dx, al

IFDEF WIN_CODE
        push    ebx
        mov     bl, 01h

```

-40-

```

        call    DebugCtl
        pop     ebx
    ENDIF
        jmp     NMIExit

SblDataR LABEL NEAR

        mov     al,SblData
        mov     BYTE PTR EaxSave,al
        btr     SblFlags,SBL_FLAG_DPEND
        jc      Sdrmo
        and     SblRxx,NOT 80h
        jmp     NMIExit
Sdrmo:
        mov     al,SBL_VER_MINOR
        call    SblPutData
        jmp     NMIExit

sblTxrR LABEL NEAR

        bt      DacFlags,DAC_FLAG_RUNNING
        jc      strrun
        mov     BYTE PTR EaxSave,7fh
        jmp     NMIExit
strrun:
        bt      SblFlags,SBL_FLAG_HISPEED
        jc      strhsp
        mov     al,SblToggle
        or      al,7fh
        add     SblToggle,20h
        mov     BYTE PTR EaxSave,al
        jmp     NMIExit
strhsp:
        mov     BYTE PTR EaxSave,0ffh
        jmp     NMIExit

SblCmdW LABEL NEAR

;mov     ah,0ch
;mov     al,cl
;call    DbPut16
;jump to the current SB command process. This will be either the
;command parser or a handler for a command data byte.
        jmp     SblProc

SblParse:
spc00:
        ; First do I/O DAC - gotsta happen fast
        cmp     cl,SBL_CMD_IODAC
        jne     spc01
        mov     SblProc,OFFSET SblGetIO
        bts     DACFlags,DAC_FLAG_IODAC
        jc      NMIExit
IFDEF WIN_CODE
        mov     SblIOBuff,80808080h
ELSE
        mov     edx,[esi.ssi_lpDMABufferLinear]
        mov     DWORD PTR[edx],80808080h
ENDIF
        mov     ax,44100
        call    DACSetRate
        mov     SblTC,0ffh
        mov     dx,[esi.ssi_wIOAddressConcert]
        add     dl,CONC_bMEMPAGE_OFF
        mov     al,CONC_DACCTL_PAGE
        out     dx,al
        add     dl,CONC_dDACPADDR_OFF - CONC_bMEMPAGE_OFF
IFDEF WIN_CODE
        mov     eax,XMSPAddrLo
        add     eax,OFFSET SblIOBuff
ELSE

```

-41-

```

    mov     eax, [esi.ssi_lpDMABufferPhys]
ENDIF
    out     dx, eax
    add     dl, CONC_WDACFC_OFF - CONC_dDACPADDR_OFF
    xor     eax, eax
    out     dx, eax
    add     dl, CONC_WDACIC_OFF - CONC_WDACFC_OFF
    mov     ax, 0ffffh
    out     dx, ax
    add     dl, CONC_bSERFMT_OFF - CONC_WDACIC_OFF
    and     [esi.ssi_bSerFmt], 0f7h
    mov     al, [esi.ssi_bSerFmt]
    out     dx, al
    add     dl, CONC_bSERCTL_OFF - CONC_bSERFMT_OFF
    and     [esi.ssi_bSerCtl], NOT 52h
    mov     al, [esi.ssi_bSerCtl]
    out     dx, al
    add     dl, CONC_bDEVCTL_OFF - CONC_bSERCTL_OFF
    or      [esi.ssi_bDevCtl]
    out     dx, al
    jmp     NMIExit

spc01:
    ; Next, check for hi-speed single mode DAC commands
    cmp     cl, SBL_CMD_SDACH
    jne     SHORT spc01a
    bts     sblFlags, SBL_FLAG_HISPEED
    call    SblClearSHH
    jmp     SblSDACH

spc01a:
    cmp     cl, SBL_CMD_SADCH
    jne     SHORT spc02
    bts     DacFlags, DAC_FLAG_ADC
    bts     sblFlags, SBL_FLAG_HISPEED
    call    SblSetSHH
    jmp     SblSDACH

spc02:
    ; Next, check for lo-speed single mode DAC
    cmp     cl, SBL_CMD_SDAC
    jne     SHORT spc02a
    call    SblClearSHH
    mov     SblProc, OFFSET SblGetDacL
    jmp     NMIExit

spc02a:
    cmp     cl, SBL_CMD_SADC
    jne     SHORT spc02b
    call    SblSetSHH
    bts     DacFlags, DAC_FLAG_ADC
    mov     SblProc, OFFSET SblGetDacL
    jmp     NMIExit

spc02B:
    cmp     cl, SBL_CMD_SILENCE
    jne     SHORT spc02c
    btr     DmaFlags, DMA_FLAG_AUTO
    mov     DmaAddr, 0000h
    mov     DmaAddrCurr, 0000h
    mov     DmaCount, 0ffffh
    mov     DmaCountCurr, 0ffffh
    btr     DmaFlags, DMA_FLAG_MASK
    call    SblSetSHH
    mov     SblProc, OFFSET SblGetDacL
    jmp     NMIExit

spc02c:
    cmp     cl, SBL_CMD_SADPCM
    jne     SHORT spc02d
    call    SblSetSHH
    mov     SblProc, OFFSET SblGetDaCL
    jmp     NMIExit

spc02d:
    cmp     cl, SBL_CMD_SADPCMR
    jne     SHORT spc03

```

-42-

```

        call    SblSetSHH
        mov     SblProc,OFFSET SblGetDaCL
        jmp     NMIExit
spc03:
        ; Next, check for the Tconst command
        cmp     cl,SBL_CMD_SETTC
        jne     SHORT spc04
        mov     SblProc,OFFSET SblGetTC
        jmp     NMIExit
spc04:
        ; Next, check for a halt
        cmp     cl,SBL_CMD_HALT
        jne     SHORT spc05
        call    DACPause
        jmp     NMIExit
spc05:
        ; Next, check for auto stop
        cmp     cl,SBL_CMD_ASTOP
        jne     SHORT spc06
        btr     DacFlags,DAC_FLAG_AUTO
        mov     dx,[esi.ssi_wIOAddressConcert]
        add     dl,CONC_bSERCTL_OFF
        or      [esi.ssi_bSerCtl], 40h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        jmp     NMIExit
spc06:
        ; Next, check for a resume
        cmp     cl,SBL_CMD_RESUME
        jne     SHORT spc07
        call    DACResume
        jmp     NMIExit
spc07:
        ; Next, Check for auto block
        cmp     cl,SBL_CMD_SETAC
        jne     SHORT spc08
        mov     SblProc,OFFSET SblGetBlkl
        jmp     NMIExit
spec08:
        ; Next, check for hi-speed/lo-speed auto DAC
        cmp     cl,SBL_CMD_ADACH
        jne     SHORT spc08a
        bts     SblFlags,SBL_FLAG_HISPEED
        call    SblClearSHH
        jmp     SHORT spauto
spc08a:
        cmp     cl,SBL_CMD_ADAC
        jne     SHORT spc08b
        call    SblClearSHH
        jmp     SHORT spauto
spc08b:
        cmp     cl,SBL_CMD_AADPCM
        jne     SHORT spc08c
        call    SblClearSHH
        jmp     SHORT spauto
spc08c:
        cmp     cl,SBL_CMD_AADCH
        jne     SHORT spc08d
        bts     SblFlags,SBL_FLAG_HISPEED
        call    SblSetSHH
        jmp     SHORT spauto
spc08d:
        cmp     cl,SBL_CMD_AADC
        jne     SHORT spc09
        call    SblSetSHH
spauto:
        bts     DacFlags,DAC_FLAG_AUTO
        bts     DacFlags,DAC_FLAG_INTENA
        mov     dx,[esi.ssi_wIOAddressConcert]
        add     dl,CONC_bSERFMT_OFF

```

-43-

```

        and     [esi.ssi_bSerFmt], NOT 08h
        mov     al, [esi.ssi_bSerFmt]
        out     dx, al
        call    DACStart
        jmp     NMIExit
spc09:
        ; Next, check for forced int command
        cmp     cl, SBL_CMD_FORCEINT
        jne     SHORT spc0a
        bts     DacFlags, DAC_FLAG_INTENA
        IFNDEF WIN_CODE
            call  AssertWavIRQ
        ELSE
            call  VirtIRQSet
        ENDIF
        jmp     NMIExit
spc0a:
        ; Next, check for the scrambler
        cmp     cl, SBL_CMD_SCRAMBLE
        jne     SHORT spc0b
        mov     SblProc, OFFSET SblGetScr
        jmp     NMIExit
spc0b:
        ; After this, the cmd eval order isn't all that important
        cmp     cl, SBL_CMD_DSPVER
        jne     SHORT spc0c
        mov     al, SBL_VER_MAJOR
        call    SblPutData
        bts     SblFlags, SBL_FLAG_DPEND
        jmp     NMIExit
spc0c:
        cmp     cl, SBL_CMD_SETTAG
        jne     SHORT spc0d
        mov     SblProc, OFFSET SblSetTag
        jmp     NMIExit
spc0d:
        cmp     cl, SBL_CMD_GETTAG
        jne     SHORT spc0e
        mov     al, SblTag
        call    SblPutData
        jmp     NMIExit
spc0e:
        cmp     cl, SBL_CMD_INVERT
        jne     SHORT spc0f
        mov     SblProc, OFFSET SblInvert
        jmp     NMIExit
spc0f:
        cmp     cl, SBL_CMD_SPKRON
        jne     SHORT spc10
        bts     SblFlags, SBL_FLAG_SPKRON
        call    SblSetDACVol
        jmp     NMIExit
spc10:
        cmp     cl, SBL_CMD_SPKROFF
        jne     SHORT spc11
        btr     SblFlags, SBL_FLAG_SPKRON
        call    SblSetDACVol
        jmp     NMIExit
spc11:
        cmp     cl, SBL_CMD_GETSPKR
        jne     SHORT spc12
        xor     al, al
        bt      SblFlags, SBL_FLAG_SPKRON
        jnc     SHORT sgsoff
        dec     al
sgsoff:
        call    SblPutData
        jmp     NMIExit
spc12:
        jmp     NMIExit

```

-44-

```

SblGetIO:
    mov     SblProc,OFFSET SblParse
    mov     ch,cl
    mov     eax,ecx
    shl     eax,16
    mov     ax,cx
    IFNDEF WIN_CODE
        mov     SblIOBuff,eax
    ELSE
        mov     edx,[esi.ssi_1pDMABufferLinear]
        mov     [edx],eax
    ENDIF
    jmp     NMIExit
SblGetDacL:
    mov     SblProc,OFFSET SblGetDacu
    mov     BYTE PTR DACCount,cl
    jmp     NMIExit

sblGetDacU:
    mov     SblProc,OFFSET SblParse
    mov     BYTE PTR DACCount+1,cl
SblSDACH:
    btr     DacFlags,DAC_FLAG_AUTO
    bts     DacFlags,DAC_FLAG_INTENA
    btr     DacFlags,DAC_FLAG_ADC
    jnc     SHORT sgdoit
    bt      DmaFlags,DMA_FLAG_MASK
    jc      SHORT sgdoit
    xor     eax,eax
    mov     dx,[esi.ssi_ DMAPageReg]
    in      al,dx
    shl     eax,16
    mov     ax,DmaAddrCurr
    mov     edx,eax
    mov     al,80h
    mov     ecx,1
    call    WritePhys
sgdoit:
    mov     dx,[esi.ssi_wIOAddressConcert]
    add     dl,CONC-bSERFMT_OFF
    and     [esi.ssi_bSerFmt],NOT 08h
    mov     al,[esi.ssi_bSerFmt]
    out     dx,al
    call    DACStart
    jmp     NMIExit
SblGetTc:
    mov     SblProc,OFFSET SblParse
    cmp     cl,SblTC
    cmp     cl,SblTc
    je      NMIExit
    ; if it's already set, get off here

    mov     SblTC,cl
    not     cl
    ; store new time const
    ; derive rate divider
    and     ecx,000000ffh
    inc     ecx
    mov     eax1000000
    xor     edx,edx
    div     ecx
    mov     SblByteRate,ax
    call    SblSetFormat
    jmp     NMIExit
SblGetBlkL:
    mov     SblProc,OFFSET SblGetBlku
    mov     BYTE PTR DACCount,cl
    jmp     NMIExit

SblGetBlku:
    mov     SblProc,OFFSET SblParse
    mov     BYTE PTR DACCount +1,cl
    jmp     NMIExit

```

-45-

```

SblGetScr:
    mov     SblProc, OFFSET SblParse
    xor     cl, SblXorPat
    add     cl, SblAccum
    mov     SblAccum, cl
    ror     SblXorPat, 2
    xor     eax, eax
    mov     dx, [esi.ssi_DMAPageReg]
    in      al, dx
    shl     eax, 16
    mov     ax, DmaAddrCurr
    mov     edx, eax
    mov     al, cl
    mov     ecx, 1
    call    WritePhys
    inc     DmaAddrCurr
    dec     DmaCountCurr
    mov     al, [esi.ssi_DmaTCMask]           ; set terminal condition
    or      DmaStatus, al
    jmp     NMIExit

SblSetTag:
    mov     SblProc, OFFSET SblParse
    mov     SblTag, cl
    jmp     NMIExit

SblInvert:
    mov     SblProc, OFFSET SblParse
    not     cl
    mov     al, cl
    call    SblPutData
    jmp     NMIExit

SblRxrR LABEL NEAR

    ;bt PicFlags, PIC_FLAG_VISR
    ;jnc SHORT nostat
    ;mov ax, 22eh
    ;call DbPut16
nostat:
    IFNDEF WIN_CODE
        call KillVIRQ
    ELSE
        call VirtIRQClear
    ENDIF
srrex:
    mov     al, SblRxr
    mov     BYTE PTR EaxSave, al
    jmp     NMIExit

    IFNDEF WIN_CODE
        ; Master controller data read
MicDataR LABEL NEAR

        cmp     MicCmd, Oah
        jne     SHORT mdrisr
        bt      PicFlags, PIC_FLAG_VIRR
        jnc     NMIExit
        jmp     SHORT mdrvim
mdrisr:
        bt      PicFlags, PIC_FLAG_VISR
        jnc     NMIExit
mdrvim:
        cmp     [esi.ssi_bIRQ], 08h
        jae     SHORT mdrvms
        or      cl, WaveIRQMask
        mov     BYTE PTR EaxSave, cl
        jmp     NMIExit
mdrvms:
        or      cl, 04h

```

-46-

```

mov     BYTE PTR EaxSave,cl
jmp     NMIExit

; Master controller command write
MicCmdW LABEL NEAR

; see if we got an EOI of any sort - if so, go to EOI sequence
mov     al,cl
and     al,0b8h
cmp     al,20h
je      SHORT mcwEOI

; if it's the init command byte, flag mask-write and get out
test    cl,10h
jz      mcwcon0
mov     MicSkip,3
jmp     NMIExit
mcwcon0:
; check for reg-read commands that we need to store
mov     al,cl
and     al,0feh
cmp     al,0ah
jne     NMIExit
mov     MicCmd,cl
jmp     NMIExit

; here we got an EOI: there are several ways to deal with this...
McwEOI:
; see if we need to wait for the last EOI
bt      PicFlags,PIC_FLAG_WAIT
jnc     mcwcon2

; here we're waiting for the last EOI
mov     al,0bh                ; get in-service reg
out     20h,al
in      al,21h
in      al,20h
mov     ah,al
mov     al,MicCmd             ; restore last reg-read command
out     20h,al
or      ah,ah                 ; if any phys in-service, wait for next
jnz     NMIExit

; last EOI in the chain - we need to see if it was a real-mode EOI
btr     PicFlags,PIC_FLAG_WAIT
mov     eax,ss
lar     eax,eax
test    eax,00400000h
jnz     SHORT mcwsok
and     esp,0000ffffh
mcwsok:
test    DWORD PTR [esp+SAVE_FRAME+8],20000h
jnz     mcwdis
; not a v86 EOI - re-assert PCI IRQ to try again...
; apw
; mov     eax,0ffffffffh
; call    DbPut32
and     DWORD PTR [esp+SAVE_FRAME+8],NOT00000200h
call    ForcePCIIRQ
jmp     NMIExit
mcwdis:
; it was real-mode, whack the v86 return stack to dispatch service
mov     RegSave,es
mov     eax,cs
add     eax,10h
mov     es,eax

mov     eax,[esp+SAVE_FRAME+12]
and     eax,0000ffffh        ; grow v86 stack by an iret frame
sub     eax,6

```

-47-

```

mov     [esp+SAVE_FRAME+12], eax

mov     edx, [esp+SAVE_FRAME+16]
and     eax, 0000ffffh      ; create linear pointer to new stack top
shl     edx, 4
add     edx, eax

mov     eax, [esp+SAVE_FRAME+0]
mov     es: [edx], ax      ; copy return frame to new stack area
mov     eax, [esp+SAVE_FRAME+4]
mov     es: [edx+2], ax
mov     eax, [esp+SAVE_FRAME+8]
mov     es: [edx+4], ax

xor     eax, eax           ; mod return frame to IRQ vect
mov     al, WaveIRQVector
shl     eax, 2
mov     eax, es: [eax]

mov     [esp+SAVE_FRAME+0], ax
shr     eax, 16
mov     [esp+SAVE_FRAME+4], ax

mov     al, 0ffh
out     21h, al
bts     PicFlags, PIC_FLAG_VISR

mov     es, RegSave
jmp     NMIExit

mcwcon2:
; this could be the EOI from the dispatched handler
btr     PicFlags, PIC_FLAG_VISR
jnc     SHORT mcwcon3
mov     al, MicMask
out     21h, al
call    DisableVirtualPIC
jmp     NMIExit

mcwcon3:
; this could be a spec EOI w/the IRQ masked - if so kill VIRQ/VIRR
cmp     [esi.ssi_bIRQ], 08h
jae     NMIExit
cmp     cl, WaveSpecEOI
jne     NMIExit
call    ClearPCIIRQ
call    KillVIRQ
jmp     NMIExit

; Master controller mask read
MicMaskR LABEL NEAR

bt     PicFlags, PIC_FLAG_VISR
jnc     NMIExit
cmp     [esi.ssi_bIRQ], 08h
jae     mmrisl
mov     al, MicMask
mov     ah, WaveIRQMask
not     ah
or      al, ah
mov     BYTE PTR EaxSave, al
jmp     NMIExit

mmrisl:
mov     al, 0ffh
mov     BYTE PTR EaxSave, al
jmp     NMIExit

; Master controller mask write
MicMaskw LABEL NEAR

; if it's an init cmd word, skip it:
cmp     MicSkip, 0

```

-48-

```

        je      SHORT mmwcon0
        dec     MicSkip
        jmp     NMIExit
mmwcon0:
        bt     PicFlags, PIC_FLAG_VISR      ; if unmasking is allowed
        jnc     SHORT mmwnrm               ; skip to normal sequence
        mov     al, 0ffh                    ; else, remask master PIC
        out     21h, al
        cmp     [esi.ssi_birQ], 08h
        jae     NMIExit
        mov     al, WaveIRQMask             ; apply only Wave IRQ mask bit
        not     al
        and     MicMask, al
        and     cl, WaveIRQMask
        or      MicMask, cl
        jmp     NMIExit
mmwnrm:
        mov     MicMask, cl                ; save mask state
        bt     PicFlags, PIC_FLAG_PEND      ; got a request pending?
        jnc     NMIExit                    ; if not, we're done

        cmp     [esi.ssi_birQ], 08h         ; are we on the master PIC?
        jae     SHORT mmwcas               ; if not, skip to cascade sequence
        test    cl, WaveIRQMask             ; is our IRQ unmasked?
        jnz     NMIExit                    ; if not, we're done
        btr     PicFlags, PIC_FLAG_PEND     ; clear pending status
        call    ForcePCIIRQ                ; force the interrupt
        jmp     NMIExit
mmwcas:
        test    cl, 04h                    ; is cascade IRQ unmasked?
        jnz     NMIExit                    ; if not, we're done
        mov     al, SicMask                 ; get slave controller mask state
        test    al, WaveIRQMask             ; is our IRQ unmasked?
        jnz     NMIExit                    ; if not, we're done
        btr     PicFlags, PIC_FLAG_PEND     ; clear pending status
        call    ForcePCIIRQ                ; force the interrupt
        jmp     NMIExit

        ; slave controller data read
SicDataR LABEL NEAR

        cmp     [esi.ssi_birQ], 08h         ; if we're not on slave, don't bother
        jnb     NMIExit
        cmp     SicCmd, 0ah
        jne     SHORT sdrisr
        bt     PicFlags, PIC_FLAG_VIRR
        jnc     NMIExit
        jmp     SHORT sdrvim
sdrisr:
        bt     PicFlags, PIC_FLAG_VISR
        jnc     NMIExit
sdrvim:
        or      cl, WaveIRQMask
        mov     BYTE PTR EaxSave, cl
        jmp     NMIExit

        ; Slave controller command write
SicCmdW LABEL NEAR

        ; if it's the init command byte, flag mask-write and get out
        test    cl, 10h
        jz      SHORT scwcon0
        mov     SicSkip, 3
        jmp     NMIExit
scwcon0:
        cmp     [esi.ssi_birQ], 08h         ; if we're not on slave, don't bother
        jnb     NMIExit

        ; check for reg-read commands that we need to store
        mov     al, cl

```

-49-

```

        and    al,0feh
        cmp    al,0ah
        jne    SHORT scwonl
        mov    SicCmd,cl
        jmp    NMIExit
scwonl:
        ; this could be a spec EOI w/ the IRQ masked - if so kill VIRQ/VIRR
        cmp    cl,WaveSpecEOI
        jne    NMIExit
        call   KillVIRQ
        jmp    NMIExit

        ; Slave controller mask write
SicMaskw LABEL NEAR
        ; if it's an init cmd word, skip it
        cmp    SicSkip,0
        je     SHORT smwcon0
        dec    SicSkip
        jmp    NMIExit
smwcon0:
        cmp    [esi.ssi_bIRQ], 08h      ; if we're not on slave, don't bother
        jnb    NMIExit

        mov    SicMask,cl                ; save mask state

        bt     PicFlags,PIC_FLAG_PEND    ; got a request pending?
        jnc    NMIExit                   ; if not, we're done
        test   cl,WaveIRQMask            ; is our IRQ unmasked?
        jnz    NMIExit                   ; if not, we're done
        test   MicMask,04h               ; is the master PIC cascade unmasked?
        jnz    NMIExit                   ; if not, we're done
        btr    PicFlags,PIC_FLAG_PEND    ; clear pending status
        call   ForcePCIIRQ               ; force the interrupt
        jmp    NMIExit
ENDIF

DmaModeW LABEL NEAR

        mov    al,cl
        and    al,03h
        cmp    al,[esi.ssi_bDMA]
        jne    NMIExit
        test   cl,10h
        jnz    SHORT dmwaon
        btr    DmaFlags,DMA_FLAG_AUTO
        jmp    NmiExit
dmwaon:
        bts    DmaFlags,DMA_FLAG_AUTO
        jmp    NmiExit

DmaMaskW LABEL NEAR

        mov    al,cl
        and    al,03h
        cmp    al,[esi.ssi_bDMA]
        jne    NMIExit
        test   cl,04h
        jnz    SHORT dmwsm
        btr    DmaFlags,DMA_FLAG_MASK
        jnc    NMIExit
        btr    DmaFlags,DMA_FLAG_DRQ
        jnc    NMIExit
        btr    DacFlags,DAC_FLAG_PEND
        jnc    SHORT dmres
        call   DACGoDammit
        jmp    NMIExit
dmres:
        call   DACResume
        jmp    NMIExit
dmwsm:

```

-50-

```

bts    DmaFlags,DMA_FLAG_MASK
jc      NMIExit
bt      DacFlags,DAC_FLAG_RUNNING
jnc     NMIExit
call    DACPause
bts     DmaFlags,DMA_FLAG_DRQ
jmp     NMIExit

```

DmaFlopW LABEL NEAR

```

btr     DmaFlags, DMA_FLAG_FLOP
jmp     NMIExit

```

Dma0AddrR LABEL NEAR

```

btc     DmaFlags,DMA_FLAG_FLOP
cmp     [esi.ssi_bDMA],0
je      DMAAddrR
jmp     NMIExit

```

Dma1AddrR LABEL NEAR

```

btc     DmaFlags, DMA_FLAG_FLOP
cmp     [esi.ssi_bDMA],1
je      DMAAddrR
jmp     NMIExit

```

Dma3AddrR LABEL NEAR

```

btc     DmaFlags, DMA_FLAG_FLOP
cmp     [esi.ssi_bDMA],3
je      DMAAddrR
jmp     NMIExit

```

DmaAddrR:

```

bt      DmaFlags, DMA_FLAG_FLOP
jc      SHORT darlow
mov     cl, BYTE PTR DmaAddrCurr+1
mov     BYTE PTR EaxSave, cl
jmp     NMIExit

```

darlow:

```

bt      DacFlags,DAC_FLAG_RUNNING
jc      SHORT darder
bt      DacFlags, DAC_FLAG_PAUSE
jc      SHORT darder
jmp     SHORT darget

```

darder:

```

mov     cx, DmaAddr
mov     dx, [esi.ssi_wIOAddressConcert]
add     dl, CONC_bMEMPAGE_OFF
mov     al, CNC_DACCTL_PAGE
out     dx, al
add     dl, CONC_WDACCFC_OFF - CONC_bMEMPAGE_OFF
call    DisableBusMaster
in      ax, dx

```

callEnableBusMaster

```

shl     eax, 2
add     cx, ax
mov     ax, DmaAddr
add     ax, DmaCount
cmp     cx, ax
jbe     SHORT dastor
mov     cx, ax

```

dastor:

```

mov     DmaAddrCurr, cx

```

darget:

```

mov     ax, DmaAddrCurr
mov     BYTE PTR EaxSave, al
jmp     NMIExit

```

-51-

Dma0AddrW LABEL NEAR

```

btc    DmaFlags,DMA_FLAG_FLOP
cmp    [esi.ssi_bDMA], 0
je     DMAAddrW
jmp    NMIExit

```

Dma1AddrW LABEL NEAR

```

btc    DmaFlags,DMA_FLAG_FLOP
cmp    [esi.ssi_bDMA], 1
je     DMAAddrW
jmp    NMIExit

```

Dma3AddrW LABEL NEAR

```

btc    DmaFlags,DMA_FLAG_FLOP
cmp    [esi.ssi_bDMA], 3
je     DMAAddrW
jmp    NMIExit

```

DMAAddrW:

```

bt     DmaFlags,DMA_FLAG_FLOP
jnc    SHORT dawupp
mov    BYTE PTR DmaAddr,cl
mov    BYTE PTR DmaAddrCurr,cl
jmp    NMIExit

```

dawupp:

```

mov    BYTE PTR DmaAddr+1,cl
mov    BYTE PTR DmaAddrCurr+1,cl
jmp    NMIExit

```

Dma0CountR LABEL NEAR

```

btc    DmaFlags,DMA_FLAG_FLOP
cmp    [esi.ssi_bDMA], 0
je     DMACountR
jmp    NMIExit

```

Dma1CountR LABEL NEAR

```

btc    DmaFlags,DMA_FLAG_FLOP
cmp    [esi.ssi_bDMA], 1
je     DMACountR
jmp    NMIExit

```

Dma3CountR LABEL NEAR

```

btc    DmaFlags,DMA_FLAG_FLOP
cmp    [esi.ssi_bDMA], 3
je     DMACountR
jmp    NMIExit

```

DmaCountR:

```

bt     DmaFlags,DMA_FLAG_FLOP
jc     SHORT dcrlow
mov    cl, BYTE PTR DmaCountCurr+1
mov    BYTE PTR EaxSave,cl
jmp    NMIExit

```

dcrlow:

```

bt     DacFlags,DAC_FLAG_RUNNING
jc     SHORT dcrder
bt     DacFlags,DAC_FLAG_PAUSE
jc     SHORT dcrder
jmp    SHORT dcrget

```

dcrder:

```

xor    eax,eax
xor    ecx,ecx
mov    cx,DmaCount
mov    dx,[esi.ssi_wIOAddressConcert]

```

-52-

```

        add     dl,CONC-bMEMPAGE_OFF
        mov     al,CONC_DACCTL_PAGE
        out     dx,al
        add     dl,CONC_WDACCFC_OFF - CONC_bMEMPAGE_OFF
        call    DisableBusMaster
        in      ax,dx
        call    EnableBusMaster
        shl     eax,2
        sub     ecx,eax
        jnc     SHORT dcrsto
        bt      DmaFlags,DMA_FLAG_AUTO
        jnc     SHORT dcrsing
        add     cx,DmaCount
        jmp     SHORT dcrsto
dcrsing:
        mov     cx,0ffffh
dcrsto:
        mov     DmaCountCurr,cx
dcrget:
        mov     ax,DmaCountCurr
        mov     BYTE PTR EaxSave,al
        jmp     NMIExit

Dma0CountW LABEL NEAR

        btc     DmaFlags, DMA_FLAG_FLOP
        cmp     [esi.ssi_bDMA],0
        je      DMACountW
        jmp     NMIExit

Dma1CountW LABEL NEAR

        btc     DmaFlags, DMA_FLAG_FLOP
        cmp     [esi.ssi_bDMA],1
        je      DMACountW
        jmp     NMIExit

Dma3CountW LABEL NEAR

        btc     DmaFlags, DMA_FLAG_FLOP
        cmp     [esi.ssi_bDMA],3
        je      DMACountW
        jmp     NMIExit

DMACountW:
        bt      DmaFlags, DMA_FLAG_FLOP
        jnc     SHORT dcwupp
        mov     BYTE PTR DmaCount,cl
        mov     BYTE PTR DmaCountCurr,cl
        jmp     NMIExit
dcwupp:
        mov     BYTE PTR DmaCount+1,cl
        mov     BYTE PTR DmaCountCurr+1,cl
        btr     DmaFlags, DMA_FLAG_SCOUNT
        jmp     NMIExit

DmaStatusR LABEL NEAR

        or      cl,DmaStatus
        bt      DmaFlags, DMA_FLAG_DRQ
        jnc     SHORT dsrnop
        or      cl,esi.ssi_DmaDRQMask]
dsrnop:
        mov     BYTE PTR EaxSave,cl
        mov     al,[esi.ssi_DmaTCMask]
        not     al
        and     DmaStatus,al
        jmp     NMIExit

OplStatR LABEL NEAR

```

-53-

```

        mov     al,OplStat
        mov     BYTE PTR EaxSave,al
        btr     MpuFlags,MPU_FLAG_FMDT
        jnc     SHORT osrex
        bts     MpuFlags,MPU_FLAG_SYNTHON
        jc      SHORT osrex
        mov     _num_active_voices,12
        mov     ActiveCount,400
        call    Synthon
osrex:
        jmp     NMIExit

OplAddrW LABEL NEAR
        mov     OplAddr,cl
        jmp     NMIExit

OplDataW LABEL NEAR
        xor     edx,edx                ; OPL data reg write
        mov     dl,OplAddr
        mov     _fm_array_[edx],cl    ; fill-in FM data array
        cmp     dl,01h
        je      SHORT opleng
        mov     dh,dl
        and     dh,0f0h
        cmp     dh,0b0h                ; need to process FM notes?
        jne     SHORT fmdtet
opleng:
        mov     ActiveCount,400
        bts     MpuFlags, MPU_FLAG_SYNTHON
        jc      SHORT fmcalls
        mov     _num_active_voices,12
        push    edx
        call    Synthon
        pop     edx
fmcalls:
        mov     eax,ds
        mov     SSoffset,esp          ; switch to local stack
        mov     SSselector,ss
        mov     esp,OFFSET StackTop
        mov     ss,eax
        push    es
        mov     es,eax
        cld
        ;
        push    edx
        call    _fm_process
        add     esp,4
        ;
        pop     es
        lss     esp,SpSave
        jmp     NMIExit
fmdtet:
        cmp     OplAddr,4            ; test for timer detection
        jne     NMIExit
fmdt1:
        test    cl,T1_TRIG
        jz      SHORT fmdt2
        or      OplStat,T1_IRQ or FM_IRQ
        bts     MpuFlags,MPU_FLAG_FMDT
fmdt2:
        test    cl,T2_TRIG
        jz      SHORT fmdm1
        or      OplStat,T2_IRQ or FM_IRQ
        bts     MpuFlags,MPU_FLAG_FMDT
fmdm1:
        test    cl,T1_MASK
        jz      SHORT fmdm2

```

-54-

```

        and    OplStat, NOT T1_IRQ
fmdm2:  test    cl, T2_MASK
        jz     SHORT fmdtr
        and    OplStat, NOT T2_IRQ
fmdtr:  test    OplStat, T1_IRQ or T2_IRQ
        jnz    NMIExit
        and    OplStat, NOT FM_IRQ
        jmp    NMIExit

```

IoNull LABEL NEAR

```

        jmp    NMIExit

```

SblSetSHH PROC

```

        bt     SblFlags, SBL_Flag_SPKRON
        jnc    SHORT sssoff
        bts    SblFlags, SBL_FLAG_SHH
        mov    al, DACVol
        or     al, 80h
        call   SetDACVol
sssoff: ret

```

sblSetSHH ENDP

SblClearSHH PROC

```

        btr    SblFlags, SBL_FLAG_SHH
        jnc    SHORT scsoff
        bt     SblFlags, SBL_Flag_SPKRON
        jnc    SHORT scsoff
        mov    al, DACVol
        and    al, 7fh
        call   SetDACVol
scsoff: ret

```

SblClearSHH ENDP

SblPutData PROC

```

        mov    SblData, al
        or     SblRxr, 80h
        ret

```

SblPutData ENDP

MpuPutDataPROC

```

        mov    MpuData, al
        and    MpuStat, NOT 80h
        ret

```

MpuPutData ENDP

IFDEF WIN\_CODE

; this process asserts the virtual Wave IRQ

AssertWaveIRQ PROC

```

        bt     DacFlags, DAC_FLAG_INTENA
        jc     SHORT awic0
        ret
awic0:  bts    PicFlags, PIC_FLAG_VIRQ ; assert virtual IRQ
        jnc    SHORT awic1           ; if already asserted, bail
        ret
awic1:

```

-55-

```

call    EnableVirtualPIC
bts     PicFlags,PIC_FLAG_VIRR    ; assert virtual IRR
cmp     [esi.ssi_bIRQ],08h        ; are we on the master PIC?
jae     SHORT awislv              ; if not, skip to slave sequence
mov     al,MicMask                ; get master PIC mask state
test    al,WaveIRQMask            ; is our IRQ masked?
jnz     SHORT awipnd              ; if so, do pend sequence
jmp     SHORT awifrc              ; else, skip to force PCI IRQ

awislv: mov     al,SicMask          ; get slave PIC mask state
test    al,WaveIRQMask            ; is our IRQ masked?
jnz     SHORT awipnd              ; if so, do pend sequence
test    MicMask,04h               ; is the cascade IRQ masked?
jnz     SHORT awifrc              ; if so, do pend sequence
jmp     SHORT awifrc              ; else, force it

awipnd: bts     PicFlags,PIC_FLAG_PEND ; flag irq pending
ret

awifrc: call    ForcePCIIRQ        ; force PCI IRQ
ret

```

AssertWaveIRZ ENDP

```

; this process asserts the physical PCI IRQ
ForcePCIIRQ PROC

```

```

mov     dx,[esi.ssi_wIOAddressConcert]; assert PCI IRQ
add     dl,CONC_bNMICTL_OFF
or      [esi.ssi_bNMICtl],01h
mov     al,[esi.ssi_bNMICtl]
out     dx,al
ret

```

ForcePCIIRQ ENDP

```

; this process clears physical PCI IRQ
ClearPCIIRQ PROC

```

```

mov     dx,[esi.ssi_wIOAddressConcert]; assert PCI IRQ
add     dl,CONC_bNMICTL_OFF
and     [esi.ssi_bNMICtl],NOT 01h
mov     al,[esi.ssi_bNMICtl]
out     dx,al
ret

```

ClearPCIIRQ ENDP

ELSE

VirtIRQSet PROC

```

bts     PicFlags,PIC_FLAG_VIRQ
mov     ecx,ds
mov     SSoffset,esp
mov     SSselector,ss
mov     esp,OFFSET StackTop
mov     ss,ecx
push    es
mov     es,ecx
cld
;
mov     eax,[esi.ssi_dwIRQHandle]
mov     ebx,[esi.ssi_dwCODECOwnerCur]
VxDCall VPICD_Set_Int_Request
;
pop     es
lss     esp,SpSave
ret

```

-56-

VirtIRQSetENDP

VirtIRQClear PROC

```

    btr    PicFlags,PIC_FLAG_VIRQ
    mov    ecx,ds
    mov    SSoffset,esp
    mov    SSselector,ss
    mov    esp,OFFSET StackTop
    mov    ss,ecx
    push   es
    mov    es,ecx
    cld
    ;
    mov    eax,[esi.ssi_dwIRQHandle]
    mov    ebx,[esi.ssi_dwCODECOwnerCur]
    VxDCall    VPICD_Clear_Int_Request
    ;
    pop    es
    lss    esp,SpSave
    ret

```

VirtIRQClear ENDP  
ENDIF

WritePhys PROC

```

    IFNDEF WIN_CODE
    push   es
    mov    ebx,cs
    add    ebx,10h
    mov    es,ebx
wphylp:
    mov    es:[edx],al
    inc    edx
    loop   wphylp
    pop    es
    ELSE
    mov    ebx,ds
    mov    SSoffset,esp
    mov    SSselector,ss
    mov    esp,OFFSET StackTop
    mov    ss,ebx
    push   es
    mov    es,ebx
    cld
    call   HARDWARE_PhysMemWrite
    pop    es
    lss    esp,SpSave
    ENDIF
    ret

```

WritePhys ENDP

DACSetRate PROC

```

    xor    ecx,ecx
    mov    cx,ax
    mov    eax,22579200/8
    xor    edx,edx
    div    ecx
    shr    eax,1
    jnc    SHORT cradj
    inc    eax
cradj:
    sub    eax,2
    mov    dx,[esi.ssi_wIOAddressConcert]
    add    dl,CONC_wDACRATE_OFF
    and    [esi.ssi_wDACRate],0e000h
    or     [esi.ssi_wDACRate],ax

```

-57-

```

mov     ax,[esi.ssi_wDACRate]
out     dx,ax
ret

```

DACSetRate ENDP

SynthOn PROC

```

xor     eax,eax
mov     edx,[esi.ssi_lpDMABufferLinear3]
mov     ecx,512
soclr:
mov     [edx],eax
add     edx,4
loop    soclr

mov     dx,[esi.ssi_wIOAddressConcert]
add     dl,CONC_bMEMPAGE_OFF
mov     al,CONC_SYNCTL_PAGE
out     dx,al
add     dl,CONC_dSYNPADDR_OFF - CONC_bMEMPAGE_OFF
mov     eax,[esi.ssi_lpDMABufferPhys3]
out     dx,eax
add     dl,CONC_WSYNFC_OFF - CONC_dSYNPADDR_OFF
mov     eax,511
out     dx,eax
add     dl,CONC_WSYNIC_OFF - CONC_WSYNFC_OFF
mov     ax,255
out     dx,ax

add     dl,CONC_bSERFMT_OFF - CONC_WSYNIC_OFF
or      [esi.ssi_bSerFmt],03h
mov     al,[esi.ssi_bSerFmt]
out     dx,al
add     dl,CONC_bSERCTL_OFF - CONC_bSERFMT_OFF
and     [esi.ssi_bSerCtl],NOT 28h
or      [esi.ssi_bSerCtl],01h
mov     al,[esi.ssi_bSerCtl]
out     dx,al
add     dl,CONC_bDEVCTL_OFF - CONC_bSERCTL_OFF
or      [esi.ssi_bDevCtl],40h
mov     al,[esi.ssi_bDevCtl]
out     dx,al

```

IFDEF WIN\_CODE

```

push    ebx
mov     bl,01h
call    DebugCtl
pop     ebx

```

ENDIF

ret

SynthOn ENDP

; kill the synth machine

SynthOff PROC

```

mov     dx,[esi.ssi_wIOAddressConcert]
add     dl,CONC_bDEVCTL_OFF
and     [esi.ssi_bDevCtl],NOT 40h
mov     al,[esi.ssi_bDevCtl]
out     dx,al
ret

```

SynthOff ENDP

; startup the DAC (or defer startup if the vDMAC is masked).

DACStart PROC

-58-

```

; this is a new DAC startup ... need to kill DAC ?
test DacFlags, (1 SHL DAC_FLAG_PAUSE) OR (1 SHL DAC_FLAG_IODAC)
jz   SHORT dsnokill
and  DacFlags, NOT ((1 SHL DAC_FLAG_PAUSE) OR (1 SHL DAC_FLAG_IODAC))
mov  dx, [esi.ssi_wIOAddressConcert]
add  dl, CONC bDEVCTL OFF
and  [esi.ssi_bDevCtl], NOT 20h
mov  al, [esi.ssi_bDevCtl]
out  dx, al

dsnokill:
bt   DmaFlags, DMA_FLAG_MASK
jc   SHORT dsdefer
call DACGoDammit
ret

dsdefer:
bts  DmaFlags, DMA_FLAG_DRQ
bts  DacFlags, DAC_FLAG_PEND
ret

DACStart ENDP

DACGoDammit PROC

; clear pending flags
btr  DacFlags, DAC_FLAG_PEND
btr  DmaFlags, DMA_FLAG_DRQ

; derive the skip counts
mov  al, 08h
test [esi.ssi_bSerFmt], 08h
jz   SHORT dgnot16
shl  eax, 1
dgnot16:
mov  NormalSkip, al
mov  al, BYTE PTR DmaAddr
and  al, 03h
mov  StartSkip, al
mov  al, 03h
sub  al, StartSkip
sub  al, BYTE PTR DmaCount
and  al, 03h
add  al, StartSkip
mov  ExtraBytes, al
shl  eax, 3
add  al, NormalSkip
mov  EndSkip, al

; derive some other count varibales
xor  eax, eax
xor  ecx, ecx
xor  edx, edx
mov  ax, DmaCount
mov  cx, DACCount
mov  dl, ExtraBytes
inc  eax
inc  ecx
add  edx, eax
test [esi.ssi_bSerFmt], 04h
jz   SHORT dgnots
shr  eax, 1
shr  ecx, 1
dgnots:
test [esi.ssi_bSerFmt], 08h
jz   SHORT dgnotw
shr  eax, 1
shr  ecx, 1
dgnotw:
or   eax, eax
jz   SHORT dgnotd0

```

-59-

```

    dec     eax
dgnod0:   mov     DMACountSamples,ax
          or      ecx,ecx
          jz      SHORT dgnod1
          dec     ecx
dgnod1:   mov     DACCountSamples,cx
          shr     edx,2
          or      edx,edx
          jz      SHORT dgnod2
          dec     edx
dgnod2:   mov     DMACountDWords,dx

          ; Now, see if we have to stop an already-running DAC
          bt      DACFlags,DAC_FLAG_RUNNING
          jnc     SHORT dgdostart
          mov     dx,[esi.ssi_wIOAddressConcert]
          add     dl,CONC_bDEVCTL_OFF
          and     [esi.ssi_bDevCtl],NOT 20h
          mov     al,[esi.ssi_bDevCtl]
          out     dx,al

          ; test for special case - was running, got new DAC count of ZERO
          cmp     DACCountSamples,0000h
          jne     SHORT dgdostart
          btr     DacFlags,-DAC_FLAG_RUNNING
IFDEF WIN_CODE
          call    AssertWaveIRQ
ELSE
          call    VirtIRQSet
ENDIF
          ret

dgdostart:
          ; Finally we're starting this thing - first flag it
          bts     DacFlags,DAC_FLAG_RUNNING

          ; setup the upper portion of the 32-bit host address
          xor     eax,eax
          mov     dx,[esi.ssi_DMAPageReg]
          in      al,dx
          shl     eax,16

          ; get our I/O address, pause, and write DMA addr
          mov     dx,[esi.ssi_wIOAddressConcert]
          mov     ecx,400
          call    DisableBusMaster
dgwait:   in      al,dx
          loop    dgwait
          call    EnableBusMaster
          add     dl,CONC_bMEMPAGE_OFF
          mov     al,CONC_DACCTL_PAGE
          out     dx,al
          add     dl,CONC_dDACPADDR_OFF - CONC_bMEMPAGE_OFF
          mov     ax,DmaAddr
          out     dx,eax

          ; program DMA count (if necessary)
          add     dl,CONC_wDACFC_OFF - CONC_dDACPADDR_OFF
          btr     DmaFlags,DMA_FLAG_SCOUNT
          jc      SHORT dgdcw
          xor     eax,eax
          mov     ax,DMACountDWords
          out     dx,eax
dgdcw:   ; now test the DAC mode and go to the proper startup sequence
          bt      DacFlags,DAC_FLAG_AUTO

```

-60-

```

        jc      DGAuto
        bt      DmaFlags,DMA_FLAG_AUTO
        jc      DGSimAuto

        ; This is a real single-mode startup - single DAC, single DMA
DGSingle:
        mov     IperBuff,0ffffh
        xor     eax,eax
        xor     ecx,ecx
        mov     ax,DmaCountCurr
        mov     cx,DACCount
        inc     ecx
        sub     eax,ecx
        jnc     SHORT dgsm00
        mov     IperBuff,0000h
        cmp     ax,0ffffh
        je      SHORT dgsm00
        mov     ax,0ffffh
        btr     DacFlags,DAC_FLAG_INTENA
dgsm00:
        mov     DmaTermCount,ax
        mov     cx,DmaCountCurr
        sub     ecx,eax
        add     cx,DmaAddrCurr
        mov     DmaTermAddr,cx

        add     dl,CONC_WDACIC_OFF - CONC_WDACFC_OFF
        mov     ax,DACCountSamples
        out     dx,ax
dgrips:
        ; single mode - let it rip
        mov     dx,[esi.ssi_wIOAddressConcert]
        add     dl,CONC_bSKIPC_OFF
        mov     al,StartSkip
        out     dx,al
        add     dl,CONC_bSERCTL_OFF - CONC_bSKIPC_OFF
        and     [esi.ssi_bSerCtl],NOT 10h
        or      [esi.ssi_bSerCtl],42h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        add     dl,CONC_bDEVCTL_OFF - CONC_bSERCTL_OFF
        or      [esi.ssi_bDevCtl],20h
        mov     al,[esi.ssi_bDevCtl]
        out     dx,al
        ret

        ; This is simulated auto-mode startup-single DAC, auto DMA
DGSimAuto:
        mov     ax,DACCount
        cmp     ax,DmaCount
        ja      dgsa02
dgsa00:
        ; this would be the "normal" sim-auto case - DAC is <= DMA count
        bts     DmaFlags,DMA_FLAG_SCOUNT
        mov     IPerDisp,0
        mov     IPerDispCurr,0
        mov     IperBuff,0ffffh
        xor     eax,eax
        xor     ecx,ecx
        mov     ax,DmaCountCurr
        mov     cx,DACCount
        inc     ecx
        sub     eax,ecx
        jnc     SHORT dgsa01
        mov     IperBuff,0
        add     ax,DmaCount
        inc     eax
dgsa01:
        mov     DmaTermCount,ax
        mov     cx,DmaCountCurr

```

-61-

```

sub    ecx,eax
add    cx,DmaAddrCurr
mov    DmaTermAddr,cx

add    dl,CONC_WDACIC_OFF - CONC_WDACFC_OFF
mov    ax,DACCountSamples
out    dx,ax
jmp    dgrips

; sim-auto, big DAC
dgsa02:
mov    ax,DmaCount
mov    DmaTermCount,ax
mov    ax,DmaAddr
mov    DmaTermAddr,ax
cmp    ExtraBytes,0
jne    dgsa03

; sim-auto, big DAC, aligned
mov    IPerDisp,0
mov    IPerDispCurr,0
mov    IPerBuff,0
;
add    dl,CONC_WDACIC_OFF - CONC_WDACFC_OFF
mov    ax,DACCountSamples
out    dx,ax
jmp    dgrips

dgsa03:
; sim-auto, big DAC, unaligned
xor    eax,eax
xor    edx,edx
xor    ecx,ecx
mov    ax,DACCount
inc    eax
mov    cx,DmaCount
inc    ecx
div    ecx
dec    eax
mov    IperDisp,ax
mov    IperDispCurr,ax
mov    IPerBuff,0

mov    dx,[esi.ssi_WIOAddressConcert]
add    dl,CONC_WDACIC_OFF
mov    ax,DMACountSamples
out    dx,ax
jmp    dgripa

; This is real auto-mode startup - auto DAC, auto DMA
DGAuto:
; two sub-cases arise here ... DACCount <= DmaCount or >.
; if > is the case, weird alignment will need special treatment
mov    ax,DACCount
cmp    ax,DmaCount
jbe    dgam01

; Auto Big DAC case here

; check for weird alignment
cmp    ExtraBytes,00h
jne    SHORT dgam00

; this is the Auto Big DAC, normal case
mov    IperBuff,0
mov    IperBuffCurr,0
mov    IperDisp,0
mov    IperDispCurr,0
;
add    dl,CONC_WDACIC_OFF - CONC_WDACFC_OFF
mov    ax,DACCountSamples

```

-62-

```

        out    dx,ax
dgam00:
        ; this is the big DAC, unaligned case - must int per DMA buff
        mov    IperBuff,0
        mov    IperBuffCurr,0
        xor    eax,eax
        xor    ecx,ecx
        xor    edx,edx
        mov    ax,DACCount
        inc    eax
        mov    cx,DmaCount
        inc    ecx
        div    ecx
        dec    eax
        mov    IperDisp,ax
        mov    IperDispCurr,ax
        ;
        mov    dx,[esi.ssi_wIOAddressConcert]
        add    dl,CONC_wDACIC_OFF
        mov    ax,DMACountSamples
        out    dx,ax
        jmp    SHORT dgripa
dgam01:
        ; small DAC ... derive ints per butt
        xor    eax,eax
        xor    ecx,ecx
        xor    edx,edx
        mov    ax,DmaCount
        inc    eax
        mov    cx,DACCount
        inc    ecx
        div    ecx
        dec    eax
        mov    IperBuff,ax
        mov    IperBuffCurr,ax
        ;
        mov    IperDisp,0
        mov    IperDispCurr,0
        ;
        ; program the interrupt count
        mov    dx,[esi.ssi_wIOAddressConcert]
        add    dl,CONC_wDACIC_OFF
        mov    ax,DACCountSamples
        out    dx,ax
dgripa:
        ; auto mode - let it rip
        mov    dx,[esi.ssi_wIOAddressConcert]
        add    dl,CONC_bSKIPPC_OFF
        mov    al,NormalSkip
        cmp    IperBuff,0
        jne    SHORT dgnoes
        mov    al,EndSkip
dgnoes:
        or     al,StartSkip
        out    dx,al
        add    dl,CONC_bSERCTL_OFF - CONC_bSKIPPC_OFF
        and    [esi.ssi_bSerCtl],NOT 50h
        or     [esi.ssi_bSerCtl],02h
        mov    al,[esi.ssi_bSerCtl]
        out    dx,al
        add    dl,CONC_bDEVCTL_OFF - CONC_bSERCTL_OFF
        or     [esi.ssi_bDevCtl],20h
        mov    al,[esi.ssi_bDevCtl]
        out    dx,al
        ret

```

DACGoDammit ENDP

DACStop PROC

-63-

```

mov     DacFlags,0000h OR (1 SHL DAC_FLAG_INTENA)
mov     dx,[esi.ssi_wIOAddressConcert]
add     dl,CONC_bSERFMT_OFF
and     [esi.ssi_bSerFmt],NOT 40h
mov     al,[esi.ssi_bSerFmt]
out     dx,al
add     dl,CONC_bDEVCTL_OFF - CONC_bSERFMT_OFF
and     [esi.ssi_bDevCtl],NOT 20h
mov     al,[esi.ssi_bDevCtl]
out     dx,al
ret

```

DACStop ENDP

DACPause PROC

```

btr     DmaFlags,DMA_FLAG_DRQ
btr     DacFlags,DAC_FLAG_PEND
bt      DacFlags,DAC_FLAG_RUNNING
jnc     SHORT dpexit
bt      DacFlags,DAC_FLAG_PAUSE
jc      SHORT dpexit
;
mov     dx,[esi.ssi_wIOAddressConcert]
add     dl,CONC_wDACCIC_OFF
call    DisableBusMaster
in      ax,dx
call    EnableBusMaster
cmp     ax,0001h
ja      SHORT dpdoit
;
mov     ecx,1000h
call    DisableBusMaster
dpwz:
in      ax,dx
or      ax,ax
loopnx  SHORT dpwz
call    EnableBusMaster
;
mov     ecx,1000h
call    DisableBusMaster
dpwnz:
in      ax,dx
or      ax,ax
loopz   SHORT dpwnz
call    EnableBusMaster
;
bt      DacFlags,DAC_FLAG_AUTO
jnc     SHORT dpexit
dpdoit:
btr     DacFlags,DAC_FLAG_RUNNING
bts     DacFlags,DAC_FLAG_PAUSE
add     dl,CONC_bSERCTL_OFF - CONC_wDACCIC_OFF
or      [esi.ssi_bSerCtl],10h
mov     al,[esi.ssi_bSerCtl]
out     dx,al
dpexit:
ret

```

DACPause ENDP

DACResume PROC

```

bt      DacFlags,DAC_FLAG_PAUSE
jnc     SHORT drexit
bt      DmaFlags,DMA_FLAG_MASK
jnc     SHORT drdoit
bts     DmaFlags,DMA_FLAG_DRQ
ret
drdoit:

```

-64-

```

btr    DmaFlags,DMA_FLAG_DRQ
btr    DacFlags,DAC_FLAG_PAUSE
bts    DacFlags,DAC_FLAG_RUNNING
mov     dx,[esi.ssi_WIOAddressConcert]
add     dl,CONC_bSERCTL_OFF
and     [esi.ssi_bSerCtl],NOT 10h
or      [esi.ssi_bSerCtl],02h
mov     al,[esi.ssi_bSerCtl]
out     dx,al

```

drexit:

ret

DACResume ENDP

SetDACVol PROC

```

mov     DACVol,al
mov     ah,al
and     ah,80h
and     al,7fh
shr     al,2
cmp     al,06h
jb      SHORT sdvok
sub     al,06h

```

sdvok:

```

not     al
and     al,1fh
or      al,ah
mov     ah,02h
call    CODECWrite
mov     ah,03h
call    CODECWrite
ret

```

SetDACVol ENDP

SetMasterVol PROC

```

mov     MasterVol,al
mov     ah,al
and     ah,80h
and     al,7fh
shr     al,2
not     al
and     al,1fh
or      al,ah
mov     ah,00h
call    CODECWrite
mov     ah,01h
call    CODECWrite
ret

```

SetMasterVol ENDP

SetSynthVol PROC

```

and     al,7fh
mov     SynthVol,al
shr     al,2
cmp     al,06h
jb      SHORT ssvok
sub     al,06h

```

ssvok:

```

not     al
and     al,1fh
mov     ah,04h
call    CODECWrite
mov     ah,05h
call    CODECWrite
ret

```

-65-

SetSynthVol ENDP

SetCDVol PROC

```

        and    al,7fh
        mov    CDVol,al
        shr    al,2
        cmp    al,05h
        jb     SHORT scvok
        sub    al,05h
scvok:
        not    al
        and    al,1fh
        mov    ah,06h
        call   CODECWrite
        mov    ah,07h
        call   CODECWrite
        ret

```

SetCDVol ENDP

CODECWrite PROC

```

        mov    dx,[esi.ssi_wIOAddressConcert]
        add    dl,CONC_bCODECSTAT_OFF
        push   eax
        mov    ecx,100h
        call   DisableBusMaster
cwrlp:
        in     al,dx
        test   al,01h
        loopnz cwrlp
        call   EnableBusMaster
        pop    eax
        add    dl,CONC_WCODECCTL_OFF - CONC_bCODECSTAT_OFF
        out    dx,ax
        ret

```

CODECWrite ENDP

IFNDEF WIN\_CODE

ISRAssertWaveIRQ PROC

```

        bt     DacFlags,DAC_FLAG_INTENA
        jc     SHORT iawc0
        ret
iawc0:
        bts    PicFlags,PIC_FLAG_VIRQ    ;assert virtual IRQ
        jnc    SHORT iawc1                ; if already asserted, skip
        ret
iawc1:
        call   EnableVirtualPIC
        bts    PicFlags,PIC_FLAG_VIRR    ; assert virtual IRR
        cmp    [esi.ssi_bIRQ],08h        ; are we on the master PIC?
        jae    SHORT iawslv              ; if not, skip to slave sequence
        mov    al,MicMask                 ; get master PIC mask state
        test   al,WaveIRQMask             ; is our IRQ masked?
        jnz    SHORT iawpnd               ; if so, re-assert pend
        jmp     SHORT iawdis               ; else, skip to dispatch
iawslv:
        mov    al,SicMask                 ; get slave PIC mask state
        test   al,WaveIRQMask             ; is our IRQ masked?
        jnz    SHORT iawpnd               ; if so, re-assert pend
        test   MicMask,04h                ; is the cascade IRQ masked?
        jnz    SHORT iawpnd               ; if so, re-assert pend
        jmp     SHORT iawdis               ; else, do it
iawpnd:
        bts    PicFlags,PIC_FLAG_PEND    ; flag irq pending
        ret

```

-66-

```

iawdis:
    bts    PicFlags,PIC_FLAG_WAIT    ; flag virtual service sequence
    ret

```

```

ISRAssertWaveIRQ ENDP

```

```

    ENDIF

```

```

IRQService PROC

```

```

    test    bl,80h                    ; forced int?
    jz      SHORT iswave
    IFNDEF WIN_CODE
        bts    PicFlags,PIC_FLAG_WAIT
    ELSE
        bts    PicFlags,PIC_FLAG_VIRQ    ; assert virtual IRQ
        mov     eax,[esi.ssi_dwIRQHandle]
        mov     ebx,[esi.ssi_dwCODECOwnerCur]
        VxDCall VPICD_Set_Int_Request
    ENDIF
    ret
iswave:
    test    bl,02h                    ; wave int?
    jz      issynt                    ; if not, test synth int

    ; here we go - wave IRQ, case it out ...
    bt      DacFlags,DAC_FLAG_AUTO
    jc      ISAuto
    bt      DmaFlags,DMA_FLAG_AUTO
    jc      ISSimAuto
ISSingle:
    btr     DacFlags,DAC_FLAG_RUNNING
    btr     SblFlags,SBL_FLAG_HISPEED
    mov     dx,[esi.ssi_wIOAddressConcert]
    add     dl,CONC_bSERFMT_OFF
    or      [esi.ssi_bSerFmt],40h
    mov     al,[esi.ssi_bSerFmt]
    out     dx,al
    add     dl,CONC_bDEVCTL_OFF - CONC_bSERFMT_OFF
    and     [esi.ssi_bDevCtl],NOT 20h
    mov     al,[esi.ssi_bDevCtl]
    out     dx,al
    add     dl,CONC_bSERCTL_OFF - CONC_bDEVCTL_OFF
    and     [esi.ssi_bSerCtl],NOT 02h
    mov     al,[esi.ssi_bSerCtl]
    out     dx,al
    or      [esi.ssi_bSerCtl],02h
    mov     al,[esi.ssi_bSerCtl]
    out     dx,al
    mov     ax,DmaTermAddr
    mov     DmaAddrCurr,ax
    mov     ax,DmaTermCount
    mov     DmaCountCurr,ax
    cmp     IperBuff,0000h
    jne     SHORT issm00
    mov     al,[esi.ssi_DmaTCMask]
    or      DmaStatus,al
issm00:
    jmp     ISDisp
ISSimAuto:
    mov     ax,DACCount
    cmp     ax,DmaCount
    jbe     ISSingle
    cmp     ExtraBytes,00h
    je      ISSingle

    ; sim-auto, big DAC, unaligned ...
    mov     dx,[esi.ssi_wIOAddressConcert]
    add     dl,CONC_bSERCTL_OFF
    sub     IPerDispCurr,1

```

-67-

```

        jc      SHORT issa01
        jnz     SHORT issa00
        or      [esi.ssi_bSerCtl],40h
issa00:
        and     [esi.ssi_bSerCtl],NOT 02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        or      [esi.ssi_bSerCtl],02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        ret
issa01:
        btr     DacFlags,DAC_FLAG_RUNNING
        btr     SblFlags,SBL_FLAG_HISPEED
        add     dl,CONC_bSERFMT_OFF - CONC_bSERCTL_OFF
        or      [esi.ssi_bSerFmt],40h
        mov     al,[esi.ssi_bSerFmt]
        out     dx,al
        add     dl,CONC_bDEVCTL_OFF - CONC_bSERFMT_OFF
        and     [esi.ssi_bDevCtl],NOT 20h
        mov     al,[esi.ssi_bDevCtl]
        out     dx,al
        add     dl,CONC_bSERCTL_OFF - CONC_bDEVCTL_OFF
        and     [esi.ssi_bSerCtl],NOT 02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        or      [esi.ssi_bSerCtl],02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        mov     ax,DmaTermAddr
        mov     DmaAddrCurr,ax
        mov     ax,DmaTermCount
        mov     DmaCountCurr,ax
        mov     al,[esi.ssi_DmaTCMask]
        or      DmaStatus,al
        jmp     ISDisp
ISAuto:
        mov     dx,[esi.ssi_wIOAddressConcert]
        add     dl,CONC_bSERCTL_OFF
        and     [esi.ssi_bSerCtl],NOT 02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        or      [esi.ssi_bSerCtl],02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        ;
        cmp     IperBuff,0
        je      SHORT isam01
        ; adjust buffer count
        sub     IperBuffCurr,1
        jc      SHORT issa00
        jnz     SHORT isam02
        ; setup end skip
        add     dl,CONC_bSKIPPC_OFF - CONC_bSERCTL_OFF
        mov     al,EndSkip
        out     dx,al
        jmp     SHORT isam02
isam00: ; restore end skip
        mov     ax,IperBuff
        mov     IperBuffCurr,ax
        add     dl,CONC_bSKIPPC_OFF - CONC_bSERCTL_OFF
        mov     al,NormalSkip
        out     dx,al
isam01: ; setup DMA TC status
        mov     al,[esi.ssi_DmaTCMask]
        or      DmaStatus,al
isam02: ; evaluate int dispatch
        cmp     IperDisp,0
        je      ISDisp
        sub     IperDispCurr,1

```

-68-

```

        jnc     isam03
        mov     ax,IperDisp
        mov     IperDispCurr,ax
        jmp     ISDisp
isam03: ; we're outta here ...
        ret
ISDisp:
        bt      DacFlags,DAC_FLAG_INTENA
        jnc     SHORT isnodis
        IFNDEF WIN_CODE
            call  ISRAssertWaveIRQ
        ELSE
            bts   PicFlags,PIC_FLAG_VIRQ ; assert virtual IRQ
            mov   eax,[esi.ssi_dwIRQHandle]
            mov   ebx,[esi.ssi_dwCODECOwnerCur]
            VxDCall VPICD_Set_Int_Request
        ENDIF
isnodis:
        ret

        btr     SblFlags,SBL_FLAG_HISPEED
        bt      DmaFlags,DMA_FLAG_AUTO ; if DMA in auto, skip
        jc      SHORT isdmaa
        bts     DmaFlags,DMA_FLAG_MASK ; auto-mask controller
isdmaa:
        mov     DmaCountCurr,Offfffh ; expire DMA count
        mov     al,[esi.ssi_DmaTCMask] ; set terminal condition
        or      DmaStatus,al
        btr     DacFlags,DAC_FLAG_RUNNING
        mov     dx,[esi.ssi_WIOAddressConcert]
        add     dl,CONC_bSERFMT_OFF
        or      [esi.ssi_bSerFmt],40h ; no zeros!!!
        mov     al,[esi.ssi_bSerFmt]
        out     dx,al
        add     dl,CONC_bDEVCTL_OFF - CONC_bSERFMT_OFF
        and     [esi.ssi_bDevCtl],NOT 20h
        mov     al,[esi.ssi_bDevCtl] ; turn DAC off
        out     dx,al

        mov     dx,[esi.ssi_WIOAddressConcert] ; re-arm int
        add     dl,CONC_bSERCTL_OFF
        and     [esi.ssi_bSerCtl],NOT 02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        or      [esi.ssi_bSerCtl],02h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
isfdis:
        bt      DacFlags,DAC_FLAG_INTENA
        jnc     SHORT issynt
        IFNDEF WIN_CODE
            call  ISRAssertWaveIRQ
        ELSE
            bts   PicFlags,PIC_FLAG_VIRQ ; assert virtual IRQ
            mov   eax,[esi.ssi_dwIRQHandle]
            mov   ebx,[esi.ssi_dwCODECOwnerCur]
            VxDCall VPICD_Set_Int_Request
        ENDIF
issynt:
        test    bl,04h ; got a synth int?
        jz      SHORT isexit ; if not, we're outta here
        ;
        mov     dx,[esi.ssi_WIOAddressConcert] ; reset synth DAC count
        add     dl,CONC_bSERCTL_OFF
        and     [esi.ssi_bSerCtl],NOT 01h ; re-arm int
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al
        or      [esi.ssi_bSerCtl],01h
        mov     al,[esi.ssi_bSerCtl]
        out     dx,al

```

-69-

```

;
add    dl,CONC_bMEMPAGE_OFF - CONC_bSERCTL_OFF
mov     al,CONC_SYNCTL_PAGE
out     dx,al
add     dl,CONC_WSYNCFX_OFF - CONC_bMEMPAGE_OFF
call    DisableBusMaster
in      ax,dx
call    EnableBusMaster
mov     edx,[esi.ssi_lpDMABufferLinear3]
cmp     ax,256
jae     SHORT isdoup
add     edx,4*256
isdoup:
cmp     ActiveCount,0
je      SHORT iskill
dec     ActiveCount
push    edx
call    _synth_update
add     esp,4
isexit:
ret
iskill:
push    0ffffffffh
call    _synth_all_notes_off
add     esp,4
mov     ActiveCount,0
btr     MpuFlags,MPU_FLAG_SYNTHON
call    SynthOff
call    _synth_reinit_voices
ret

```

IRQService ENDP

IFDEF WIN\_CODE

VcpiService:

```

cmp     ax,0de0ch                ; handle goto v86 mode separately
je      VSGoV86
;
; The following sequence handles all protected mode VCPI far-calls
; with the exception of the switch-to-v86-mode call.
; Here we have intercepted the far call and must translate it to the
; real EMS VCPI handler whose selectors were stored at init time.
; - DO NOT trash the eax or edx register entry values.
; - Restore ALL registers before returning.
;
pushfd                ; no ints!
cli
push    ecx                ; save minimum regs
mov     ecx,cs
add     ecx,08h
push    ds
mov     ds,ecx
mov     SSoffset,esp        ; switch to local stack
mov     esp,OFFSET StackTop
mov     SSselector,ss
mov     ss,ecx
push    es                ; setup global data selector
add     ecx,08h
mov     es,ecx
push    ebx                ; save some working regs

mov     ecx,0008h          ; find a GDT patch entry
mov     ebx,cs
cmp     ebx,0020h
jae     SHORT csok
mov     ecx,ebx
add     ecx,0018h

csok:
mov     VEselector,cx        ; note GDT entry for call
sgdt    ClientTab

```

-70-

```

mov     ebx,CTladdr                ; point into client table
add     ebx,ecx

mov     ecx,es:[ebx+00h]            ; save current entries
mov     SaveGentries+00h,ecx
mov     ecx,es:[ebx+04h]
mov     SaveGentries+04h,ecx
mov     ecx,es:[ebx+08h]
mov     SaveGentries+08h,ecx
mov     ecx,es:[ebx+0ch]
mov     SaveGentries+0ch,ecx
mov     ecx,es:[ebx+10h]
mov     SaveGentries+10h,ecx
mov     ecx,es:[ebx+14h]
mov     SaveGentries+14h,ecx

mov     ecx,VcpiGentries+00h       ; patch w/saved VCPI entries
mov     es:[ebx+00h],ecx
mov     ecx,VcpiGentries+04h
mov     es:[ebx+04h],ecx
mov     ecx,VcpiGentries+08h
mov     es:[ebx+08h],ecx
mov     ecx,VcpiGentries+0ch
mov     es:[ebx+0ch],ecx
mov     ecx,VcpiGentries+10h
mov     es:[ebx+10h],ecx
mov     ecx,VcpiGentries+14h
mov     es:[ebx+14h],ecx
;
call    VcpiEntry                  ; make the real VCPI call
;
mov     ecx,SaveGentries+00h       ; restore original client entries
mov     es:[ebx_00h],ecx
mov     ecx,SaveGentries+04h
mov     es:[ebx+04h],ecx
mov     ecx,SaveGentries+08h
mov     es:[ebx+08h],ecx
mov     ecx,SaveGentries+0ch
mov     es:[ebx+0ch],ecx
mov     ecx,SaveGentries+10h
mov     es:[ebx+10h],ecx
mov     ecx,SaveGentries+14h
mov     es:[ebx+14h],ecx

pop     ebx                        ; restore working regs
pop     es                         ; restore global selector
lss     esp,SpSave                 ; restore stack
pop     ds
pop     ecx
popfd                                     ; restore other stuff
retf

; This is the intercept of the VCPI Client's protected-mode
; (USE32) far call to the switch-to-v86-mode function.
VSGoV86:
; we can use eax here as long as we explicitly restore it to
; xxxxde0ch when we're done (or just save/restore it). In any case,
; its probably not save to grow the client stack for this call,
; i.e., don't push anything.
; we can completely trash first 8 bytes of the stack for temp
; storage since neither we nor the real VCPI Server will be
; performing a USE32 far return to the VCPI client.
; All segment registers can be trashed except ds.
;
mov     [esp],ebx                  ; save some regs
mov     [esp+4],ds
mov     eax,cs                    ; setup seg registers
add     eax,08h
mov     ds,eax                    ; ds is for our data
add     eax,08h

```

-71-

```

mov     es, eax                                ; es is for the full linear space

; Here we need to tell the VCPI mode switch call to return
; to our v86 code instead of the client's. Save the client's
; v86 return address in the shared memory space so our v86
; code can eventually return to it.
;
mov     eax, [esp+10]                          ; save client v86 destination
mov     ax, [esp+8]
mov     ebx, pSharedData
mov     es: [ebx+4], eax
;
mov     eax, VOffset                          ; setup our v86 destination
mov     [esp+8], eax
mov     eax, VFsegment
mov     [esp+12], eax
mov     eax, cs
mov     VSelector, ax                        ; note selector for far call
sgdt    ClientTab
mov     ebx, Ctladdr                          ; point to client GDT patch entry
add     ebx, eax
;
mov     Ctladdr, ebx                          ; save GDT entry laddr for later fixup
mov     eax, cr3                              ; save client's cr3
mov     ClientCr3, eax
;
mov     eax, VcpiGentries+00h                 ; copy-in the real VCPI GDT entries
mov     es: [ebx+00h], eax
mov     eax, VcpiGentries+04h
mov     es: [ebx+04h], eax
mov     eax, VcpiGentries+08h
mov     es: [ebx+08h], eax
mov     eax, VcpiGentries+0ch
mov     es: [ebx+0ch], eax
mov     eax, VcpiGentries+10h
mov     es: [ebx+10h], eax
mov     eax, VcpiGentries+14h
mov     es: [ebx+14h], eax
;
mov     ds, [esp+4]
mov     ebx, [esp]                            ; restore regs
mov     eax, 0000de0ch
jmp     cs: VcpiEntry                        ; go to the real VCPI switch handler

```

DebugService:

```

push    ecx
mov     ecx, cs
add     ecx, 08h
push    ds
mov     ds, ecx
mov     ecx, dr6
test    ecx, 08h
jz      dsexit
push    eax
push    edx
push    esi
mov     esi, gpSSI
and     ecx, NOT 08h
mov     dr6, ecx
cmp     KBLastByte, 0e0h
mov     KBLastByte, al
jne     SHORT dskbex
cmp     al, 30h
je      SHORT dsvup
cmp     al, 2eh
je      SHORT dsvdn
cmp     al, 20h
je      SHORT dsvmu
jmp     SHORT dskbex

```

-72-

```

dsvup:
    mov     al,MasterVol
    and     al,7fh
    cmp     al,127-4
    ja      SHORT dskdo0
    add     al,4
    call    SetMasterVol
    jmp     SHORT dskdo0

dsvdn:
    mov     al,MasterVol
    and     al,7fh
    cmp     al,4
    jb      SHORT dskdo0
    sub     al,4
    call    SetMasterVol
    jmp     SHORT dskdo0

dsvmu:
    mov     al,MasterVol
    xor     al,80h
    call    SetMasterVol
    ; jmp   SHORT dskdo0

dskdo0:
    mov     eax,ss
    lar     eax,eax
    test    eax,400000h
    jnz     SHORT dsspok
    and     exp,0ffffh

dsspok:
    mov     BYTE PTR [esp+8],0

dekbex:
    pop     esi
    pop     edx
    pop     eax
    pop     ds
    pop     ecx
    iretd

dsexit:
    mov     ecx,cr3
    and     ecx,0ffffff00h
    cmp     ecx,EMMPageDir
    pop     ds
    pop     ecx
    je      SHORT dsisemm
    iretd

dsisemm:
    jmp     cs:DebugLink

Int67Service:
    ; Switch to protected mode call - make sure we're properly
    ; patched before linking to the VCPI Server's handler.
    ;
    cmp     ax,0de0ch                ; switch call ?
    jne     i67tfix
    ;
    ; This is the switch to protected mode by the DOS extender.
    ; Since it's telling us all of it's protected mode context,
    ; patch its IDT now.
    ;
    mov     eax,cs
    push    ebx
    add     eax,08h
    push    ecx
    mov     ds,eax
    add     eax,08h
    mov     es,eax
    test    PatchFlags,0001h
    jz      i67prs
    mov     eax,cr3
    mov     CR3Save,eax
    and     eax,0fffh

```

-73-

```

    or     eax,es:[esi]
    mov    cr3,eax                      ; use extender's page tables

    xor     eax,eax
    mov    ebx,es:[esi+8]              ; IDT big enough?
    cmp    WORD PTR es:[ebx],02h*8+7
    jnb    SHORT i67prx
    mov    ebx,es:[ebx+2]
    or     ebx,ebx                      ; does IDT exist?
    jz     SHORT i67prx
    cmp    DWORD PTR es:[ebx+02h*8+4],00008eleh
    jne    SHORT i67psg                ; is it already patched?
    mov    ax,es:[ebx+02h*8+2]
    add    eax,8+8+7
    mov    ebx,es:[esi+4]              ; make sure out selectors are
    cmp    ax,es:[ebx]                 ; where we thing they are
    ja     SHORT i67psg
    mov    ebx,es:[ebx+2]
    cmp    DWORD PTR es:[ebx+eax+1-4], 00de9300h
    jne    SHORT i67psg

i67pex:
    mov    ebx, es:[esi+8]             ; set int 6e == our PCI IRQ
    cmp    WORD PTR es:[ebx],77h*8+7
    jnb    SHORT i67prx
    mov    evx, es:[ebx+2]
    mov    eax,es:[ebx+6eh*8]
    mov    ecx, es:[ebx+6eh*8+4]
    add    ebx, PCIIRQVectOff
    mov    es:[ebx],eax
    mov    es:[ebx+4],ecx

i67prx:
    mov    eax,CR3Save
    mov    cr3,eax

i67prs:
    pop    ecx
    pop    ebx
    mov    eax,0de0ch
    jmp    cs:Int67Link

i67psg:
    xor     ecx,ecx                    ;find out GDT entries
    mov    ebx,es:[esi+4]
    mov    cx,ex:[ebx]
    sub    ecx,-1+03h*8
    shr    ecx,3
    mov    eax,01h*8
    mov    ebx,es:[ebx+2]

i67psl:
    cmp    DWORD PTR es:[ebx+eax+02h*8+4], 00de9300h
    je     SHORT i67ppi
    add    eax,8
    loop   i67psl
    jmp    SHORT      i67PEX

i67ppi:
    shl    eax,16                      ; now patch the IDT
    mov    ebx, es:[esi+8]
    mov    cx,es:[ebx]
    mov    ebx, es:[ebx+2]
    mov    es:[ebx+02h*8],eax
    add    eax,18h
    mov    es:[ebx+01h*8],eax
    mov    es:[ebx+02h*8+4], 00008eleh
    mov    es:[ebx+01h*8+4], 00008eleh
    jmp    i67pex

;This is a call from the v86 code to restore the VCPI client's
;GDT entries after a switch-to-V86-mode VCPI far call.
i67tfix:
    cmp    ax,0dee0h
    jne    SHORT i67tgp
    ;

```

-74-

```

push    eax                ;save regs
push    esi
mov     eax,cs
add     eax,08h
mov     ds,eax
add     eax,08h
mov     es,eax
mov     eax,cr3
mov     RegSave,eax
mov     eax,ClientCr3      ; need client's page context
mov     cr3,eax           ; don't use stack until restored
;
mov     esi,CTladdr
;
mov     eax,ConcGentries+00h ; restore client GDT entries
mov     es:[esi+00h],eax
mov     eax,ConcGentries+es+04h
mov     es:[esi+04h],eax
mov     eax,ConcGentries+08h
mov     es:[esi+08h],eax
mov     eax,ConcGentries+0ch
mov     es:[esi+0ch],eax
mov     eax,ConcGentries+10h
mov     es:[esi+10h],eax
mov     eax,ConcGentries+14h
mov     es:[esi+14h],eax
;
mov     eax,RegSave
mov     cr3,eax
pop     esi
pop     eax
iretd

; This is us intercepting the VCPI v86 get-protected-mode-interface
; call. We will make the VCPI handler return to our v86 code
; for return value mods. Our v86 handler will then return
; control to the original v86 return destination.
i67tgp:
cmp     ax,0de01h          ; VCPI GetPMI call?
jne     SHORT i67tcmd
;
push    eax
mov     eax,cs
add     eax,08h
mov     ds,eax
add     eax,08h
mov     es,eax
mov     eax,ss
lar     eax,eax             ; validate stack pointer
test    eax,00400000h
jnz     SHORT i67s32
and     esp,0000ffffh

i67s32:
mov     ebx,pSharedData    ;setup es: [ebx] for shared data
mov     es:[ebx+12],di      ;save init di to shared space
mov     eax[esp+6]          ;save v86 return to shared space
mov     ax,[esp+4]
mov     es:[ebx+8],eax
mov     eax,VGoffset       ;force v86 ret to vivo gpml code
mov     [esp+4],eax
mov     eax,VGsegment
mov     [esp+8],eax
;
or     PatchFlags,0001h
pop     eax
jmp     Int67Link           ;link to normal PM handler

i67tcmd:
cmp     ax,0deelh
je      SHORT i67cmdh
jmp     cs:Int67link

```

-75-

```

i67cmdh:
;proprietary command handler - no regs saved yet...
;this hadler is invoked only from v86 mode with
;int 67, ax=deed, bh=cmd, bl=arg/return
push    ecx
push    ds
mov     ecx,cs
add     ecx,08h
mov     ds,ecx
mov     SSoffset, esp
mov     SSelector, ss
mov     esp,OFFSET StackTop
mov     ss,ecx
push    es
mov     es,ecx
push    eax
push    edx
push    esi
mov     esi,gpSSI
cld

i67c00:
cmp     bh,00h
jne     SHORT i67c01
push    ebx
call    IRQService

pop     ebx
jmp     i67cex

i67c01:
cmp     bh,01h
jne     SHORT i67c04
;
call    LoadShadowRegs
mov     SblTC,0ffh
mov     AdFormat,08h
;
mov     eax,XMSPAddrLo
add     eax,OFFSET SynthBuffer
mov     [esi.ssi_1pDMABufferPhys3],eax
;
mov     ActiveCount,0
CALL    _synth_init
;
IFDEF WIN-CODE
push    ebx
mov     bl,01h
call    DebugCt]
pop     ebx
ENDIF
jmp     i67cex

i67c04:
cmp     bh,04h
jne     SHORT i67c05
and     bl,7fh
mov     MT32Enable,bl
push    ebx
call    _synth_set_MT32
add     esp,4
jmp     i67cex

i67c05:
cmp     bh,05h
jne     SHORT i67c06
mov     bl,MT32Enable
jmp     i67cex

i67c06:
cmp     bh,06h
jne     SHORT i67c07
mov     al,bl
call    SetSynthVol

```

-76-

```

        jmp     i67cex
i67c07:  cmp     bh,07h
        jne     SHORT i67c08
        mov     bl,SynthVol
        jmp     i67cex
i67c08:  cmp     bh,08h
        jne     SHORT i67c09
        mov     al,bl
        and     al,7fh
        call    .SetDACVol
        jmp     i67cex
i67c09:  cmp     bh,09h
        jne     SHORT i67c0a
        mov     bl,DACVol
        test    bl,80h
        jz      SHORT i67nom
        xor     bl,bl
i67nom:  jmp     i67cex
i67c0a:  cmp     bh,0ah
        jne     SHORT i67c0b
        mov     al,bl
        call    SetCDVol
        jmp     i67cex
i67c0b:  cmp     bh,0bh
        jne     SHORT i67c0c
        mov     bl,CDVol
        jmp     i67cex
i67c0c:  cmp     bh,0ch
        jne     SHORT i67c0d
        not     bl
        jmp     i67cex
i67c0d:  cmp     bh,0dh
        jne     SHORT 67c0e

        call    LoadShadowRegs
        mov     Sb1TC,0ffh
        mov     AdFormat,08h

        mov     eax,cs
        add     eax,0010h
        mov     es,eax
        mov     esi,pSharedData

        mov     eax,cs
        add     eax,0010h
        mov     es,eax
        mov     esi,pShareData

        mov     eax,es:[esi]
        and     eax,0ffff000h
        mov     al,67h
        mov     edx,PT1GPTr
        mov     ecx,3*0400h
; Get Wave Phys
; Align
; and add page table attribs

i67mwv:  mov     [edx],eax
        add     edx,4
        add     eax,1000h
        loop    i67mwv
;
        mov     eax,cr3
        mov     cr3,eax
; Flush TLB
;

```

-77-

```

        mov     eax,es:[esi]           ; Get Wave Phys
        and     eax,00000fffh         ; extract page hangover
        and     eax,40000000h         ; Add to Linear address (1G)
        sub     eax,XMSPAddrLo        ; Derive logical pointer
        mov     WaveData_ptr,eax      ; and save
        jmp     i67cex

i67c0e:  cmp     bh,0eh
        jne     SHORT i67c0f
        mov     PicFlags, 0000h
        call    DisableVirtualPIC
        jmp     i67cex

i67c0f:  cmp     bh,0fh
        jne     SHORT i67c10
        call    DebugCtl
        jmp     i67cex

i67c10:  cmp     bh,10h
        jne     SHORT i67c11
        mov     al,b1
        call    SetMasterVol
        jmp     i67cex

i67c11:  cmp     bh,11h
        jne     SHORT i67cex
        mov     bl,MasterVol
        and     bl,7fh

i67cex:  pop     esi
        pop     edx
        pop     eax
        pop     es
        lss     esp,SpSave
        pop     ds
        pop     ecx
        iretd

DebugCtl PROC
        or      bl,b1
        jnz     SHORT dcon
        mov     eax,dr7
        and     eax,NOT 80h
        mov     dr7,eax
        ret

dcon:    mov     eax,cr4
        or      eax,08h
        mov     cr4,eax
        mov     eax,dr7
        and     eax,NOT 0c0h
        mov     dr7,eax
        mov     eax,60h
        mov     dr3,eax
        xor     eax,eax
        mov     dr6,eax
        mov     eax,dr7
        and     eax,NOT 0f0000080h
        or      eax,20000280h
        mov     dr7,eax
        mov     KBLastByte,00h
        ret

DebugCtl ENDP

; this funct loads the shadow registers from the IC
;
LoadShadowRegs PROC
        mov     dx,[esi,ssi_wIOAddressConcert]

```

-78-

```

add     dl,CONC_bDEVCTL]_OFF
in      al,dx
mov     [esi,ssi_bDevCtl],al
add     dl,CONC_wDACRATE_OFF- CONC_bDEVCTL_OFF
in      ax,dx
mov     [esi,ssi_wDACRate],ax
add     dl,CONC_bNMICCTL_OFF - CONC-wDACRATE_OFF
in      al,dx
or      al,40h          ; save mr. hand
mov     [esi,ssi_bNMICtl],al
add     dl,CONC_bSERFMT_OFF -CONC_bNMICCTL_OFF
mov     al,03h
out     dx,al
mov     [esi,ssi_bSerFmt],al
add     dl,CONC_bSERCTL_OFF - CONC_bSERFMT_OFF
in      al,dx
mov     [esi,ssi_bSerCtl], al
ret

```

LoadShadowRegs ENDP

```

; kill the virtual interrupt request
killVIRQ PROC

```

```

        btr     PicFlags,PIC_FLAG_VIRQ
        jnc     SHORT kvqc1
        mov     al,MicMask
        cmp     [esi,ssi_bIRQ],08h
        jnb     SHORT kvqc0
        mov     al,SicMask
kvqc0:   test    al,waveIRQMask
        jz      SHORT kvqc1
        btr     PicFlags, PIC_FLAG_VISR
        jc      SHORT kvqc1
        call    DisableVirtualPIC
kvqc1:   btr     PicFlags,PIC_FLAG_VIRR
        btr     PicFlags,PIC_FLAG_PEND
        ret

```

killVIRQ ENDP

```

;enable PIC I/O trapping
EnableVirtualPIC PROC

```

```

        in      al,21h
        mov     MicMask,al
        in      al,0a1h
        mov     SicMask,al
        mov     dx,[esi,ssi_wIOAddressConcert]
        add     dl,CONC_bNMIENA_OFF
        mov     al,7fh
        out     dx,al
        ret

```

EnableVirtualPIC ENDP

```

        IFDEF WIN_CODE
;disable PIC I/O trapping
DisableVirtual PIC PROC

```

```

        mov     dx,[esi,ssi_wIOAddressConcert]
        add     dl,CONC_bNMIENA_OFF
        mov     al,2fh
        out     dx,al
        ret

```

DisableVirtual PIC ENDP

-79-

ENDIF

;disable bus mastering in PCI config space  
DisableBusMaster PROC

```

cmp    DirectAccess,0
jne    SHORT dbmok
ret

```

dbmok:

```

push    eax
push    edx
mov     dx,0cf8h
mov     eax,DirectAccess
out     dx,eax
add     dl,4
mov     ax,0101h
out     dx,ax
pop     edx
pop     eax
ret

```

DisableBusMaster ENDP

\* ;enable bus mastering in PCI config space  
EnableBusMaster PROC

```

cmp    DirectAccess,0
jne    SHORT ebmok
ret

```

ebmok:

```

push    eax
push    edx
mov     dx,0cf8h
mov     eax,DirectAccess
out     dx,eax
add     dl,4
mov     ax,0105h
out     dx,ax
pop     edx
pop     eax
ret

```

EnableBusMaster ENDP

ENDIF

IFDEF WIN\_CODE

IFDEF DOS\_DEBUG

PUBLIC DbPut8

DbPut8 PROC

```

push    ebx
push    ecx
push    edx
push    ds
push    es
mov     ecx,cs
add     ecx,08h
mov     ds,ecx
add     ecx,08h
mov     es,ecx

```

```

mov     ebx,DebugPtr
mov     ecx,2

```

d81:

```

rol     al,4
mov     edx,eax
and     edx,0fh
cmp     edx,0ah

```

-80-

```

        jae     SHORT d82
        add     edx,'0'
        jmp     SHORT d83
d82:    add     edx,'A' - 0ah
d83:    mov     es:[ebx],dl
        add     ebx,2
        cmp     ebx,DEBUG_END
        jb      d8nw1
        mov     ebx,DEBUG_START
d8nw1:  loop    SHORT d81

        mov     BYTE PTR es:[ebx], ' '
        add     ebx,2
        cmp     ebx,DEBUG_END
        jb      d8nw2
        mov     ebx,DEBUG_START
d8nw2:  mov     BYTE PTR es:[ebx], '*'
        mov     DebugPtr,ebx

        pop     es
        pop     ds
        pop     edx
        pop     ecx
        pop     ebx
        ret

```

DbPut8 ENDP

```

        PUBLIC DbPut16
DbPut16 PROC

```

```

        push    ebx
        push    ecx
        push    edx
        push    ds
        push    es
        mov     ecx,cs
        add     ecx,08h
        mov     ds,ecx
        add     ecx,08h
        mov     es,ecx

        mov     ebx,DebugPtr
        mov     ecx,4
d161:   rol     ax,4
        mov     edx,eax
        and     edx,0fh
        cmp     edx,0ah
        jae     d162
        add     edx,'0'
        jmp     SHORT d163
d162:   add     edx,'A' - 0ah
d163:   mov     es:[ebx],dl
        add     ebx,2
        cmp     ebx,DEBUG_END
        jb      d16nw1
        mov     ebx,DEBUG_START
d16nw1: loop    d161

        mov     BYTE PTR es:[ebx], ' '
        add     ebx,2
        cmp     ebx,DEBUG_END

```

-81-

```

        jb     d16nw2
        mov     ebx,DEBUG_START
d16nw2:
        mov     BYTE PTR es:[ebx],'*'
        mov     DebugPtr,ebx

        pop     es
        pop     ds
        pop     edx
        pop     ecx
        pop     ebx
        ret

DbPut16 ENDP

        PUBLIC DbPut32
DbPut32 PROC

        push    ebx
        push    ecx
        push    edx
        push    ds
        push    es
        mov     ecx,cs
        add     ecx,08h
        mov     ds,ecx
        add     ecx,08h
        mov     es,ecx

        mov     ebx,DebugPtr
        mov     ecx,8

dp321p:
        rol     eax,4
        mov     edx,eax
        and     edx,0fh
        cmp     edx,0ah
        jae     SHORT dp32hx
        add     edx,'0'
        jmp     SHORT dp32wr

dp32hx:
        add     edx,('A' - 0ah)

dp32wr:
        mov     es:[ebx],dl
        add     ebx,2
        cmp     ebx,DEBUG_END
        jb     SHORT dp32na
        mov     ebx,DEBUG_START

dp32na:
        loop    dp321p

        mov     BYTE PTR es:[ebx],' '
        add     ebx,2
        cmp     ebx,DEBUG_END
        jb     dp32nb
        mov     ebx,DEBUG_START

dp32nb:
        mov     BYTE PTR es:[ebx],'*'
        mov     DebugPtr,ebx

        pop     es
        pop     ds
        pop     edx
        pop     ecx
        pop     ebx
        ret

DbPut32 ENDP
ENDIF
ELSE
IFDEF DEBUG

```

-82-

```

PUBLIC DbPut32
DbPut32 PROC
    push    ecx
    mov     ecx, ds
    mov     SSoffset, esp
    mov     SSselector, ss
    mov     esp, OFFSET Stacktop
    mov     ss, ecx
    push    es
    mov     es, ecx

```

```

Trace_Out "IOHNDRLS: #EAX"

```

```

    pop     es
    lss     esp, SpSave
    pop     ecx
    ret

```

```

DbPut32 ENDP

```

```

ENDIF
ENDIF

```

```

IFDEF WIN_CODE
VxD_LOCKED_CODE_ENDS

```

```

VxD_LOCKED_DATA_SEG
ENDIF

```

```

ALIGN 4

```

```

IFDEF WIN_CODE

```

```

DevTable LABEL DWORD
    DD MpuTable, WssTable, SblTable, MpuTable
    DD MicTable, MdcTable, SicTable

```

```

ELSE

```

```

DevTable LABEL DWORD
    DD MpuTable, WssTable, SblTable, MpuTable
    DD 0, MdcTable

```

```

ENDIF

```

```

MpuTable LABEL DWORD
    DD MpuDataR, MpuDataW, MpuStatR, MpuCmdw
    DD HostStatR, IoNull, IoNull, IoNull
    DD OdAddrR, OdAddrW, OdDataR, OdDataW
    DD IoNull, IoNull, IoNull, IoNull
    DD Op1StatR, Op1AddrW, IoNull, Op1DataW
    DD IoNull, IoNull, IoNull, IoNull

```

```

WssTable LABEL DWORD
    DD IoNull, IoNull, IoNull, IoNull
    DD IoNull, IoNull, IoNull, IoNull
    DD AdAddrR, AdAddrW, AdDataR, AdDataW
    DD AdStatusR, AdStatusW, IoNull, IoNull

```

```

SblTable LABEL DWORD
    DD Op1StatR, Op1AddrW, IoNull, Op1DataW
    DD Op1StatR, Op1AddrW, IoNull, Op1DataW
    DD IoNull, SblMixAddrW, SblMixDataR, SblMixDataW
    DD IoNull, SblResetW, IoNull, SblResetW
    DD Op1StatR, Op1AddrW, IoNull, Op1DataW
    DD SblDataR, IoNull, SblDataR, IoNull
    DD SblTxrR, SblCmdW, SblTxrR, SblCmdW
    DD SblRxxR, IoNull, SblRxxR, IoNull

```

-83-

```

        IFNDEF WIN_CODE
MicTable LABEL DWORD
        DD MicDataR, MicCmdW, MicMaskR, MisMaskW
        ENDIF

MdcTable LABEL DWORD
        DD Dma0AddrR, Dma0AddrW, Dma0CountR, Dma0CountW
        DD Dma0AddrR, Dma0AddrW, Dma0CountR, Dma0CountW
        DD IoNull, IoNull, IoNull, IoNull
        DD Dma3AddrR, Dma3AddrW, Dma3CountR, Dma3CountW
        DD DmaStatusR, IoNull, IoNull, IoNull
        DD IoNull, DmaMaskW, IoNull, DmaModeW
        DD IoNull, DmaFlopW, IoNull, IoNull
        DD IoNull, IoNull, IoNull, IoNull

```

```

        IFNDEF WIN_CODE
SicTable LABEL DWORD
        DD SicDataR, SicCmdW, IoNull, SicMaskW
        ENDIF

```

```

pWaveBuffer DD ?
pWaveData DD ?

Sb1IOBuff DD 80808080h

StackTop DB 1024 DUP(0eeh)
        LABEL NEAR

SynthBuffer DD 512 DUP(0)

```

```

        IFNDEF WIN_CODE
        IFNDEF DOS_DEBUG
DebugPtr DD DEBUG_START
        ENDIF
gpSSI DD OFFSET HwConfig
        ENDIF

```

```

ClientCr3 DD ?
ClientTab LABEL FWORD
CTlimit DW ?
CTladdr DD ?

```

```

.EaxSave DD ?
.RegSave DD ?
.CR3Save DD ?

```

```

SaveGentries DD 6 DUP(?)

```

```

SblProc DD OFFSET SblParse

```

```

MidiMessage DD 000000ffh

```

```

ADFreqTable LABEL WORD
        DW 8000, 5513, 16000, 11025
        DW 27429, 18900, 32000, 22050
        DW 22050, 37800, 37800, 44100
        DW 48000, 33075, 9600, 6615

```

```

SpSave LABEL FWORD
SSoffset DD ?
SSselector DW 2 DUP(?)

```

```

SBblByteRate DW 22222

```

```

MpuFlags DW 0000h
SblFlags DW 0000h
DacFlags DW 0000h OR (1 SHL DAC_FLAG_INTENA)

```

-84-

|                 |              |                          |
|-----------------|--------------|--------------------------|
| PicFlags        | DW 0000h     |                          |
| Dma Flags       | DW 0000h     | OR (1 SHL DMA_FLAG_MASK) |
| PatchFlags      | DW 8000h     |                          |
|                 |              |                          |
| SbSrate         | DW11025      |                          |
| DACCount        | DW ?         |                          |
| DACCountSamples | DW ?         |                          |
| DACCountSamples | DW ?         |                          |
| DMACountDWords  | DW ?         |                          |
| DmaAddr         | DW ?         |                          |
| DmaAddrCurr     | DW ?         |                          |
| DmaTermAddr     | DW ?         |                          |
| DmaCount        | DW ?         |                          |
| DmaCountCurr    | DW ?         |                          |
| DmaTermCount    | DW ?         |                          |
| IperBuff        | DW ?         |                          |
| IperBuffCurr    | DW ?         |                          |
| IperDisp        | DW ?         |                          |
| IperDispCurr    | DW ?         |                          |
| StartSkip       | DB ?         |                          |
| NormalSkip      | DB ?         |                          |
| EndSkip         |              | DB ?                     |
| ExtraBytes      | DB ?         |                          |
|                 |              |                          |
| MidiDataC       | DB 2         |                          |
| MidiCurrC       | DB 1         |                          |
|                 |              |                          |
| MpuData         | DB 0feh      |                          |
| MpuStat         | DB 10111111b |                          |
| MpuTemp         | DB ?         |                          |
| OdAddr          | DB ?         |                          |
| OdieCDCfg       | DB 80h       |                          |
| AdAddr          | DB ?         |                          |
| AdDACVoll       | DB ?         |                          |
| AdDACVolR       | DB ?         |                          |
| AdCDVoll        | DB ?         |                          |
| AdCDVolR        | DB ?         |                          |
| AdFormat        | DB 08h       |                          |
| AdConfig        | DB 0ch       |                          |
| ADPinCtl        | DB 00h       |                          |
|                 |              |                          |
| SblData         | DB 0aah      |                          |
| SblRxr          | DB 01111111b |                          |
| SblTxr          | DB 01111111b |                          |
| SblTag          | DB ?         |                          |
| SblToggle       | DB ?         |                          |
|                 |              |                          |
| DmaStatus       | DB 00h       |                          |
| MicCmd          | DB ?         |                          |
| MicMask         | DB ?         |                          |
| MicSkip         | DB 00h       |                          |
| SicCmd          | DB ?         |                          |
| SicMask         | DB ?         |                          |
| SicSkip         | DB 00h       |                          |
|                 |              |                          |
| TagByte         | DB 80h       |                          |
| Toggle          | DB 0         |                          |
| SpkrStat        | DB 00h       |                          |
| SblAccum        | DB 0aah      |                          |
| SblXorPat       | DB 96h       |                          |
|                 |              |                          |
| SblTC           | DB 0d3h      |                          |
| SblMixAddr      | DB 40h       |                          |
|                 |              |                          |
| OplAddr         | DB 01h       |                          |
| OplStat         | DB 06h       |                          |
| CdAddr          | DB 40h       |                          |
|                 |              |                          |
| KBLastByte      | DB 00h       |                          |
| MT32Enable      | DB 00h       |                          |

-85-

```

MasterVol      DB ?
SynthVol       DB ?
DACVol         DB ?
DACVolPhys     DB ?
CDVol          DB ?

SblMixer        DB 11h,      11h,   99h,   11h   ; 00h - 07h
                DB 11h,      11h,   11h,         ; 08h - 0dh
SblStereo       DB 11h,      11h,   11h,         ; 0eh - 0fh STE
                DB 11h,      11h,   11h,   11h,   ; 10h - 17h
                DB 11h,      11h,   11h,   11h,   ; 18h - 1fh
                DB 11h,      99h,   11h,   99h,   ; 20h - 27h
                DB 11h,      11h,   11h,   11h,   ; 28h - 2fh

ActiveCount     DW ?

    IFNDEF WIN_CODE
    _TEXT ENDS
    ELSE
    VxD_LOCKED_DATA_ENDS
    ENDIF

    END

```

-86-

APPENDIX B

©1997 Ensoniq

.386p

INCLUDE vivo.inc

```

NUM_CODEPAGES    EQU 25

NMI_INT          EQU 02h
TIMER_INT        EQU 08h

DOS_SETVECT      EQU 25h
DOS_TSR          EQU 31h
DOS_GETVECT      EQU 35h
DOS_FREE         EQU 49h
DOS_MODIFY       EQU 4ah

```

```

PARMBLK STRUCT
    envseg WORD ?
    cmdoff WORD ?
    cmdseg WORD ?
    fcbloff WORD ?
    fcb1seg WORD ?
    fcb2off WORD ?
    fcb2seg WORD ?
PARMBLK ENDS

```

```

_TEXT    SEGMENT DWORD PUBLIC USE16 'CODE'

```

```

    ASSUME cs:_TEXT, ds:_TEXT

```

```

    ORG 0100h

```

```

Start:
    jmp Entry

```

```

; Resident Data (non-discardable) starts here

```

```

    ALIGN 2
FromScope      LABEL NEAR
VivoGentries    DD 6 DUP(?)
XmsPaddr        LABEL DWORD
XPlower         DW ?
XPupper         DW ?
NumCodePages    DW 0000h

```

```

HwConfig        LABEL NEAR
BasePort         DW 0000h
WavePort         DW ?
OttoPort         DW ?
WaveIrq          DB ?
MidiIrq          DB ?
DmaChan          DB ?
ExtMidi          DB ?
SbEnable         DB ?
SynthVol         DB ?
WaveVol          DB ?
CdAuxVol         DB ?
BoardType        DB ?

```

```

    ALIGN 2
SharedData       LABEL NEAR
Int67Return      LABEL DWORD
I67Roffset       DW ?
I67Rsegment      DW ?

```

-87-

```

V86Return      LABEL DWORD
V86Roffset     DW ?
V86Rsegment    DW ?
GetPmiDi       DW ?

DosLink        LABEL DWORD
DLOffset       DW ?
DLsegment      DW ?

MuxLink        LABEL DWORD
MLOffset       DW ?
MLsegment      DW ?

TimerLink      LABEL DWORD
TLOffset       DW ?
TLsegment      DW ?

Flags          DW 0
FLAG_WIN       EQU 0

MidiPic        DW 0021h
MidiVect       DB 08h
MidiUnmask     DB ?

        IFDEF DOS_DEBUG
DebugPtr       DW 2*(80*0 + 0)
        ENDIF

```

; Resident Code (non-discardable) starts here

```

        IFDEF DOS_DEBUG
DbPutCh PROC

        push    es
        push    di

        mov     di,0b000h; apw
        mov     es,di
        mov     di,cs:DebugPtr
        mov     es:[di],al
        add     cs:DebugPtr,4

        pop     di
        pop     es
        ret

DbPutCh ENDP

```

```

DbPutByte PROC

        push    cx
        push    dx
        push    di
        push    es

        mov     di,cs:DebugPtr
        mov     dx,0b000h
        mov     es,dx
        mov     cx,2

@@1:    rol     al,4
        mov     dl,al
        and     dl,0fh
        cmp     dl,0ah
        jb      @@2
        add     dl,'A' - 0ah
        jmp     SHORT @@3

@@2:
@@3:

```

-88-

```

    add     dl,'0'
@@3:      mov     es:[di],dl
          add     di,2
          cmp     di,2*80*24
          jb      nba
          xor     di,di
nba:      loop    @@1

          mov     BYTE PTR es:[di],' '
          add     di,2
          cmp     di,2*80*24
          jb      nbb
          xor     di,di
nbb:      mov     BYTE PTR es:[di],'*'
          mov     cs:DebugPtr,di

          pop     es
          pop     di
          pop     dx
          pop     cx
          ret

```

DbPutByte ENDP

DbPutWord PROC

```

          push    cx
          push    dx
          push    di
          push    es

          mov     di,cs:DebugPtr
          mov     dx,0b000h
          mov     es,dx
          mov     cx,4
@@1:      rol     ax,4
          mov     dl,al
          and     dl,0fh
          cmp     dl,0ah
          jb      @@2
          add     dl,'A' - 0ah
          jmp     SHORT @@3
@@2:      add     dl,'0'
@@3:      mov     es:[di],dl
          add     di,2
          cmp     di,2*80*24
          jb      nwa
          xor     di,di
nwa:      loop    @@1

          mov     BYTE PTR es:[di],' '
          add     di,2
          cmp     di,2*80*24
          jb      nwb
          xor     di,di
nwb:      mov     BYTE PTR es:[di],'*'
          mov     cs:DebugPtr,di

          pop     es
          pop     di
          pop     dx

```

-89-

```

        pop     cx
        ret

```

```

DbPutWord ENDP
        ENDIF

```

```

NmiIsr  PROC FAR

```

```

        push    ax
        push    dx
        mov     dx,cs:BasePort
        add     dl,NMISTAT_OFF
        in      al,dx
        in      al,61h
        and     al,0fh
        or      al,08h
        out     61h,al
        and     al,07h
        out     61h,al
        pop     dx
        pop     ax
        iret

```

```

NmiIsr  ENDP

```

```

MidiIsr PROC FAR

```

```

        bt      cs:Flags,FLAG_WIN
        jnc     midoit
        iret
midoit:
        push    ax
        push    bx
        mov     ax,0deelh
        mov     bh,00h
        int     67h
        pop     bx
        pop     ax
miexit:
        iret

```

```

MidiIsr ENDP

```

```

DosIsr  PROC FAR

```

```

        bt      cs:Flags,FLAG_WIN
        jnc     didoit
        jmp     cs:DosLink
didoit:
        cmp     ah,DOS_SETVECT
        je      disvect
        jmp     cs:DosLink
disvect:
        cmp     al,02h
        je      diskip
        cmp     al,cs:MidiVect
        je      diskip
        jmp     cs:DosLink
diskip:
        iret

```

```

DosIsr  ENDP

```

```

MuxIsr  PROC FAR

```

```

        pushf

```

-90-

```

        cmp     ax,1605h
        je      wstrt
        cmp     ax,1606h
        je      wstop
milink:  popf
        jmp     cs:MuxLink
wstrt:   bts     cs:Flags,FLAG_WIN
        push    ax
        push    dx
        mov     dx,cs:BasePort
        add     dl,CONTROL_OFF
        xor     al,al
        out     dx,al
        add     dl,NMICTL_OFF-CONTROL_OFF
        out     dx,al
        pop     dx
        pop     ax
        jmp     milink
wstop:   btr     cs:Flags,FLAG_WIN
        push    ax
        push    dx
        ;
        mov     dx,cs:WavePort
        mov     al,40h OR CD_CONFIG
        out     dx,al
        inc     dl
        mov     al,04h
        out     dx,al
        dec     dl
        mov     al,CD_ADLEVOL
        out     dx,al
        inc     dl
        mov     al,8ch
        dec     dl
        mov     al,CD_ADRVOL
        out     dx,al
        inc     dl
        mov     al,8ch
        ;
        mov     dx,cs:BasePort
        add     dl,CONTROL_OFF
        mov     al,08h
        out     dx,al
        add     dl,NMICTL_OFF-CONTROL_OFF
        mov     al,0a0h
        cmp     cs:SbEnable,00h
        je      wnosb
        or      al,40h
wnosb:   out     dx,al
        ;
        pop     dx
        pop     ax
        jmp     milink
MuxIsr  ENDP

```

TimerIsr PROC FAR

```

        bt      cs:Flags,FLAG_WIN
        jnc     tidoit
        jmp     cs:TimerLink
tidoit:  push    ax
        push    dx
        mov     dx,cs:MidiPic

```

-91-

```

in      al,dx
and     al,cs:MidiUnmask
out     dx,al
;
in      al,61h
and     al,07h
out     61h,al
;
xor     al,al
out     70h,al
pop     dx
pop     ax
jmp     cs:TimerLink

```

TimerIsr ENDP

GetPmi:

```

push    eax
push    cx
;
mov     eax,cs:XmsPaddr
shr     eax,10
and     al,0fch
add     ax,cs:GetPmiDi

```

i67pla:

```

mov     DWORD PTR es:[di],0ffffff067h
add     di,4
cmp     di,ax
jb      i67pla
;
mov     eax,cs:XmsPaddr
mov     al,67h
mov     cx,cs:NumCodePages

```

i67plb:

```

mov     es:[di],eax
add     di,4
add     eax,1000h
loop    i67plb
;
mov     bx,OFFSET VivoGentries
mov     cx,6

```

i67glp:

```

mov     eax,cs:[bx]
add     bx,4
mov     [si],eax
add     si,4
loop    i67glp
sub     si,24
;
mov     ebx,14h
pop     cx
pop     eax
jmp     cs:Int67Return

```

Fixup:

```

mov     ax,0dee0h
int     67h
jmp     cs:V86Return

```

TsrEnd LABEL NEAR

; Init Data (discardable) starts here

ALIGN 2

|           |             |                            |
|-----------|-------------|----------------------------|
| XmsEntry  | LABEL DWORD | ; XMS far-call entry point |
| XEoffset  | DW ?        |                            |
| XEsegment | DW ?        |                            |
| XmsHandle | DW ?        | ; our XMS chunk handle     |

-92-

```

ToScope      LABEL NEAR          ; discardable data sent to SCOPE.EXE
EmmCr3       DD ?
EmmGdt       DF ?
EmmIdt       DF ?
             DW OFFSET FromScope
             DW OFFSET HwConfig
             DW OFFSET GetPmi
             DW OFFSET Fixup
             DW OFFSET SharedData

```

```

ParamBlock   PARMBLK < ?, OFFSET Param, ?, 5ch, ?, 6ch, ? > ; param struct for .EXE spawning

```

```

FileHandle   DW 0
SsPath       DB 65 DUP(?)
Vscape32     DB '\VSCAPE32.BIN',0
SsConfig     DB '\SSCONFIG.EXE',0
Scope        DB '\SCOPE.EXE',0
Dos4GW       DB '\DOS4GW.EXE',0
Quiet        DB 'DOS4G=QUIET',0
Param        DB 127 DUP(' ')
TmpBuff      DB 128 DUP(?)

```

```

; Init Code (discardable) starts here

```

```

        IFDEF DOS_DEBUG
PrintChar PROC

```

```

        push    ax
        push    dx
        mov     dl,al
        mov     ah,02h
        int     21h
        pop     dx
        pop     ax
        ret

```

```

PrintChar ENDP

```

```

PrintWord PROC

```

```

        push    ax
        push    cx
        push    dx

        mov     cx,4
@@1:    rol     ax,4
        mov     dl,al
        and     dl,0fh
        cmp     dl,0ah
        jb      @@2
        add     dl,'A' - 0ah
        jmp     SHORT @@3
@@2:    add     dl,'0'
@@3:    push    ax
        mov     al,dl
        call    PrintChar
        pop     ax
        loop    @@1
        rol     ax,4

        pop     dx
        pop     cx
        pop     ax

```

-93-

ret

PrintWord ENDP

PrintRet PROC

```
    push    ax
    push    dx

    mov     ah,02h
    mov     dl,0dh
    int     21h
    mov     dl,0ah
    int     21h

    pop     dx
    pop     ax
    ret
```

PrintRet ENDP

PrintStr PROC

```
    push    ax
    push    dx
    push    di
    mov     ah,02h
@@1:  mov     dl,es:[di]
    inc     di
    or      dl,dl
    jz      @@2
    int     21h
    jmp     SHORT @@1
@@2:  pop     di
    pop     dx
    pop     ax
    ret
```

PrintStr ENDP  
ENDIF

PrintMsg PROC

```
    push    bp
    mov     bp,sp
    push    ax
    push    dx
    push    si

    mov     si,[bp+2]
    mov     ah,02h
@@1:  mov     dl,[si]
    inc     si
    or      dl,dl
    jz      @@2
    int     21h
    jmp     SHORT @@1
@@2:  mov     [bp+2],si

    pop     si
    pop     dx
    pop     ax
    pop     bp
```

-94-

```

        ret

PrintMsg ENDP

WordToStr PROC

        push    cx
        push    dx

@@1:    mov     cx,4

        rol     ax,4
        mov     dl,al
        and     dl,0fh
        cmp     dl,0ah
        jb      @@2
        add     dl,'A' - 0ah
        jmp     SHORT @@3

@@2:    add     dl,'0'

@@3:    mov     es:[di],dl
        inc     di
        loop    @@1

        mov     BYTE PTR es:[di],0
        inc     di

        pop     dx
        pop     cx
        ret

WordToStr ENDP

; StrCpy
;
; Inputs: ds:si - source string
;         es:di - destination string
; Return: Nothing. All regs are left unaffected except ...
;         di - this will point to the byte immediately following the last
;         destination byte that was copied to.
StrCpy PROC

        push    ax
        push    si                ; save regs

@@1:    mov     al,[si]
        mov     es:[di],al        ; copy the string
        inc     si
        inc     di
        cmp     al,0
        jne     @@1

        pop     si
        pop     ax                ; restore regs and exit
        ret

StrCpy ENDP

Entry:
        ; string ops forward always
        cld

        ; print a hello dorks message
        call    PrintMsg
        DB 0dh,0ah,' SoundscapeVIVO(TM) Initialization Driver, Version

```

-95-

3.22.',0dh,0ah

DB ' Copyright(c) 1995-1996, ENSONIQ Corp., All Rights  
Reserved.',0dh,0ah,0

```

; if we need to, free all but our 64k so we can spawn later
mov     ax,sp
cmp     ax,0fffeh
jne     csizok
mov     bx,cs
mov     es,bx
mov     bx,1000h
mov     ah,DOS_MODIFY
int     21h

csizok:
; see if loader is command shell - if not, assume .com and resize
mov     ax,cs:[0016h]
mov     es,ax
mov     bx,es:[0016h]
cmp     ax,bx
je      psizok
mov     es,ax
mov     bx,1000h
mov     ah,DOS_MODIFY
int     21h

psizok:
; get the int 67 vector, make sure we got a memory manager
mov     ax,(DOS_GETVECT SHL 8) OR 67h
int     21h
mov     ax,es
or      ax,ax
jnz     emvok
call    PrintMsg
DB 0dh,0ah,07h,' error: Memory Manager not detected.',0dh,0ah
DB '      SoundscapeVIVO requires EMM386 or similar.',0dh,0ah,0
jmp     exit

emvok:
; see if we're already loaded
mov     ax,0deelh
mov     bx,0b55h
int     67h
cmp     bl,0aah
jne     ssnpres
call    PrintMsg
DB 0dh,0ah,' ... SoundscapeVIVO driver is currently loaded
...',0dh,0ah,0
jmp     exit

ssnpres:
; locate our path and save it
xor     di,di
mov     es,cs:[002ch]
mov     cx,0ffffh
xor     al,al

envlp:
repne scasb
cmp     al,es:[di]
jne     SHORT envlp
mov     bx,di
add     di,3

push    ds
mov     si,di
mov     ax,es
mov     ds,ax
mov     di,OFFSET SsPath
mov     ax,cs
mov     es,ax
call    StrCpy
pop     ds
;
mov     di,OFFSET SsPath

```

-96-

```

xor     al,al
repne scasb
pushf
std
mov     al,'\'
repne scasb
popf
inc     di
mov     BYTE PTR [di],0

; set the local quiet environment var for 4GW spawn
mov     di,bx
mov     es,cs:[002ch]
mov     si,OFFSET Quiet
call    StrCpy
mov     BYTE PTR es:[di],0

; build the parameter line for config spawn
mov     di,OFFSET Param+2
mov     ax,ds
mov     es,ax
mov     ax,OFFSET HwConfig
call    WordToStr                      ; setup config offset arg
mov     BYTE PTR [di-1], ' '
mov     ax,ds
call    WordToStr                      ; setup segment arg
mov     BYTE PTR [di-1],0dh
sub     di,OFFSET Param+2              ; add length
mov     ax,di
mov     Param,al

; build the filename for the config code
mov     si,OFFSET SsPath
mov     di,OFFSET TmpBuff
mov     dx,ds
mov     es,dx                          ; first copy path
call    StrCpy
dec     di
mov     si,OFFSET SsConfig             ; append filename
call    StrCpy

mov     bx,OFFSET ParamBlock           ; setup param block
mov     ax,cs:[002ch]
mov     (PARMBLK PTR [bx]).envseg,ax
mov     (PARMBLK PTR [bx]).cmdseg,ds
mov     (PARMBLK PTR [bx]).fcb1seg,ds
mov     (PARMBLK PTR [bx]).fcb2seg,ds
mov     dx,OFFSET TmpBuff
mov     ax,ds
mov     es,ax
mov     ax,4b00h                       ; and spawn the .exe
int     21h
jnc     cfgran
call    PrintMsg
DB 0dh,0ah,07h,' error: Could not execute SSCONFIG.EXE.',0dh,0ah,0
jmp     exit

cfgran:
cmp     BasePort,0
jne     cfgok
jmp     exit

cfgok:
; see if we have to bail now ...
mov     di,0080h
xor     cx,cx
mov     cl,[di]                        ; look for /N cmd line arg
or      cl,cl
jz      nokill
dec     cx
inc     di
mov     ax,ds

```

-97-

```

mov     es,ax
mov     al,'/'
repne   scasb
jnz     nokill
mov     al,[di]
and     al,0dfh
cmp     al,'N'
jne     nokill
call    PrintMsg
DB 0dh,0ah,' Initialization Complete, DOS drivers NOT
loaded.',0dh,0ah,0dh,0ah,0
jmp     exit
nokill:
; setup some HW-dependent vars
mov     cl,MidiIrq
cmp     cl,08h
jbe     mvrset
mov     MidiPic,00ah
mov     MidiVect,70h
mvrset:
and     cl,07h
add     MidiVect,cl
mov     al,1
shl     al,cl
not     al
mov     MidiUnmask,al

; see if we have an XMS driver
mov     ax,4300h
int     2fh
cmp     al,80h
je      xmspr
call    PrintMsg
DB 0dh,0ah,07h,' error: XMS services were not detected.',0dh,0ah,0
jmp     exit
xmspr:
; get the XMS control function entry point
mov     ax,4310h
int     2fh
mov     XEoffset,bx
mov     XEsegment,es

; get enough XMS for our 32-bit code
mov     dx,(4 * NUM_CODEPAGES)
mov     ah,09h
call    XmsEntry
or      ax,ax
jnz     xmsok
call    PrintMsg
DB 0dh,0ah,07h,' error: Could not allocate required Extended
Memory.',0dh,0ah,0
jmp     exit
xmsok:
; lock the XMS block (handle in dx), save phys addr
mov     ah,0ch
call    XmsEntry
or      ax,ax
jnz     xmlok
call    PrintMsg
DB 0dh,0ah,07h,' error: Could not lock Extended Memory.',0dh,0ah,0
jmp     xfexit
xmlok:
mov     XPlower,bx
mov     XPupper,dx

; make sure we're below 4M
mov     eax,XmsPaddr
add     eax,((NUM_CODEPAGES SHL 12) - 1)
cmp     eax,400000h
jbe     xm4ok

```

-98-

```

        call    PrintMsg
        DB 0dh,0ah,07h,' error: Could not allocate Extended Memory below 4
Mbyte boundary.',0dh,0ah
        DB '          Try loading SSINIT.COM before SMARTDRV.EXE',0dh,0ah,0
fxexit:
        jmp     xuexit
xm4ok:
        ; get the EMM386 environment and data for scope.exe
        mov     eax,cr3
        mov     EmmCr3,eax
        sgdtd   EmmGdt
        sidtd   EmmIdt

        ; build the parameter line for scope spawn
        mov     di,OFFSET Param+2
        mov     ax,ds
        mov     es,ax
        mov     si,OFFSET SsPath          ; setup fpath and fname for DOS4GW
        call    StrCpy
        dec     di
        mov     si,OFFSET Scope
        call    StrCpy
        mov     BYTE PTR [di-1], ' '
        mov     BYTE PTR [di], 0
        mov     ax,OFFSET ToScope
        call    WordToStr                ; setup data-out offset arg
        mov     BYTE PTR [di-1], ' '
        mov     ax,ds
        call    WordToStr                ; setup segment arg
        mov     BYTE PTR [di-1],0dh
        sub     di,OFFSET Param+2        ; add length
        mov     ax,di
        mov     Param,al

        ; build the filename for the scope (DOS4GW) code
        mov     si,OFFSET SsPath
        mov     di,OFFSET TmpBuff
        mov     dx,ds
        mov     es,dx                    ; first copy path
        call    StrCpy
        dec     di
        mov     si,OFFSET Dos4GW        ; append filename
        call    StrCpy

        mov     bx,OFFSET ParamBlock    ; setup param block
        mov     dx,OFFSET TmpBuff
        mov     ax,ds
        mov     es,ax
        mov     ax,4b00h                ; and spawn the .exe
        int     21h
        jnc     scpran
        call    PrintMsg
        DB 0dh,0ah,07h,' error: Could not execute SCOPE.EXE.',0dh,0ah,0
        jmp     fxexit
scpran:
        cmp     NumCodePages,0
        je      scpok
        jmp     fxexit
scpok:
        mov     dx,OFFSET NmiIsr        ; install NMI service
        mov     ax,(DOS_SETVECT SHL 8) OR 02h
        int     21h
        mov     dx,OFFSET MidiIsr       ; install MIDI IRQ service
        mov     al,MidiVect
        int     21h

        mov     ax,(DOS_GETVECT SHL 8) OR 21h
        int     21h                    ; save DOS vector
        mov     DLOffset,bx
        mov     DLsegment,es

```

-99-

```

mov     dx,OFFSET DosIsr           ; install our DOS service
mov     ah,DOS_SETVECT
int     21h

mov     ax,(DOS_GETVECT SHL 8) OR 2fh
int     21h                       ; save Mux vector
mov     MOffset,bx
mov     MLsegment,es
mov     dx,OFFSET MuxIsr          ; install our Mux service
mov     ah,DOS_SETVECT
int     21h

mov     ax,(DOS_GETVECT SHL 8) OR TIMER_INT
int     21h                       ; save timer vector
mov     TLOffset,bx
mov     TLsegment,es
mov     dx,OFFSET TimerIsr        ; install our timer service
mov     ah,DOS_SETVECT
int     21h

; call synth-init and enable otto ints
mov     ax,0deelh
mov     bh,01h
int     67h
mov     dx,BasePort
add     dl,CONTROL_OFF
mov     al,08h
out     dx,al

; wait, then un-mute the synth
mov     dx,BasePort
add     dl,ODADDR_OFF
mov     cx,000fh
unmwtlpo:
push    cx
mov     cx,0ffffh
unmwtlpi:
in      al,dx
loop    unmwtlpi
pop     cx
loop    unmwtlpo
;
cmp     BoardType,00h
jne     unmvcr

mov     dx,cs:WavePort
mov     al,CD_PINCTL
out     dx,al
inc     dx
in      al,dx
or      al,40h
out     dx,al
jmp     unmdone

unmvcr:
mov     dx,cs:WavePort
mov     ah,SynthVol
xor     ah,7fh
shr     ah,2
mov     al,CD_LINELVOL
out     dx,al
inc     dx
mov     al,ah
out     dx,al
dec     dx
mov     al,CD_LINERVOL
out     dx,al
inc     dx
mov     al,ah
out     dx,al

unmdone:

```

-100-

```

; enable system NMI, then VIVO NMI
in      al,61h
and     al,03h
or      al,04h
out     61h,al
xor     al,al
out     70h,al
mov     dx,BasePort
add     dl,NMICTL_OFF
mov     al,0a0h
cmp     SbEnable,0
je      sbldon
or      al,40h
sbldon: out     dx,al
TandSR: call    PrintMsg
        DB 0dh,0ah,' Initialization Complete.',0dh,0ah,0dh,0ah,0

mov     es,cs:[002ch]          ; free our local environment seg
mov     ah,DOS_FREE
int     21h

mov     dx,(OFFSET TsrEnd + 000fh) ; terminate / stay resident
shr     dx,4
mov     ax,(DOS_TSR SHL 8)
int     21h

xuexit: ; unlock XMS memory block
mov     dx,XmsHandle
mov     ah,0dh
call    XmsEntry
xfexit: ; free XMS memory block
mov     dx,XmsHandle
mov     ah,0ah
call    XmsEntry
exit:   ; get outta here
ret

_TEXT  ENDS

END Start

```

-101-

APPENDIX C

©1997 Ensoniq

```

#include <stdio.h>
#include <stdlib.h>
#include <i86.h>

#define NUM_CODEPAGES    25    /* number of 4k pages occupied by v32 code */

// #define DEBUG

/* Some standard typedefs ... */
typedef unsigned char    BYTE;
typedef unsigned short   WORD;
typedef unsigned long     DWORD;

/* The following structure is the data passed in from SSINIT */
typedef struct {
    DWORD    CR3;                /* EMM's CR3 */
    WORD     GdtLimit;           /* EMM's GDT limit, linear address */
    DWORD    GdtLaddr;
    WORD     IdtLimit;           /* EMM's IDT limit, linear address */
    DWORD    IdtLaddr;
    WORD     DoOffset;           /* output data offset */
    WORD     HwOffset;           /* HW config data offset */
    WORD     GetPmiOff;          /* offset of v86 get PMI return handler */
    WORD     FixupOff;           /* offset of v86 switch return handler */
    WORD     SharedOff;          /* offset to v86/V32 shared data area */
} DATA_IN;

/* The following structure points to SSINIT's resident data area */
typedef struct {
    DWORD    VivoGentries[6];    /* VIVO GDT entries for VCPI get PMI */
    DWORD    XmsPaddr;           /* phys addr of Extended Mem */
    WORD     NumCodePages;       /* number of 4k v32 code pages */
} DATA_RES;

/* The following structure is SSINIT's HW config data */
typedef struct {
    WORD     BasePort;           /* Gate Array base port */
    WORD     WavePort;           /* CoDec base port */
    WORD     SynthPort;          /* Otto base port */
    BYTE     WaveIrq;            /* CoDec/SB IRQ */
    BYTE     MidiIrq;            /* Synth IRQ */
    BYTE     DmaChan;            /* CoDec/SB DMA channel */
    BYTE     ExtMidi;             /* External MIDI enable */
    BYTE     SbEnable;           /* SB emulation enable */
    BYTE     SynthVol;           /* Synth volume */
    BYTE     WaveVol;            /* Wave volume */
    BYTE     CdAuxVol;           /* CD/Aux volume */
    BYTE     BoardType;          /* Vivo rev number */
} HW_CONFIG;

/* The following structure is the config data at the top of the V32 code */
typedef struct {
    BYTE     JumpTable[0x1c];    /* jump instr's for multiple entry pts */
    DWORD    VivoGentries[6];    /* the VIVO VCPI Get PMI GDT entries */
    DWORD    VcpiGentries[6];    /* the real VCPI Get PMI GDT entries */
    DWORD    SharedDataP;        /* linear addr of v86/V32 shared data */
    DWORD    MidiVectOff;        /* IDT MIDI vect offset from NMI */
    DWORD    GetPmiOff;          /* QWORD far ptr to v86 Get PMI handler */
    DWORD    GetPmiSeg;
    DWORD    FixupOff;           /* QWORD far ptr to v86 switch fixup handler */
    DWORD    FixupSeg;
    DWORD    I67LinkOff;         /* PM link to the real Int 67 handler */
    WORD     I67LinkSel;
    DWORD    VcpiEntryOff;       /* PM entry point to the real VCPI handler */
    WORD     VcpiEntrySel;
    WORD     HardwareOptions;     /* bit field for board type */
    WORD     BasePort;           /* duplication of hardware config for V32 */

```

-102-

```

        WORD      WavePort;
        WORD      SynthPort;
        BYTE      WaveIrq;
        BYTE      MidiIrq;
        BYTE      DmaChan;
        BYTE      ExtMidi;
        BYTE      SynthVoll;
        BYTE      SynthVolR;
    } V32_CONFIG;

    /* The following structure is the DOS mem used in the VCPI Get PMI call */
    typedef struct {
        DWORD      PageTable[0x0400];
        DWORD      VcpiGentries[6];
        BYTE      DosStack[0x0400 - 4*6];
    } DOS_MEM;

    DWORD      DosMalloc(DWORD size);
    void      DosFree(WORD selector);
    DWORD      GetGDT();
    DWORD      GetVcpi(WORD dmseg);

    DWORD      GetCR3();          /* This function returns the 386 CR3 value */
    #pragma aux GetCR3 = \
        "mov     eax,cr3" \
        value    [eax];

    void      FlushTLB(void);     /* This function flushes the page table TLB */
    #pragma aux FlushTLB = \
        "mov     eax,cr3" \
        "mov     cr3,eax" \
        modify   [eax];

    void      SetI(void);        /* This function disables interrupts */
    #pragma aux SetI = \
        "sti";

    void      ClrI(void);        /* This function enables interrupts */
    #pragma aux ClrI = \
        "cli";

    void main(int argc, char *argv[]) {

    #ifdef DEBUG
        FILE      *fd;
    #endif
        FILE      *fp = 0;
        DATA_IN   *pdi;
        DATA_RES   *pdr;
        HW_CONFIG   *phw;
        V32_CONFIG   *pv32;
        DOS_MEM far *pdm;
        DWORD      *pd4g0, *pxms, *pgdt, *pidt, *ppdir;
        DWORD volatile *pptab;
        DWORD      tmp;
        WORD      dioffset, dooffset, dsegment;
        WORD      i, j, dmseg, dmsel = 0;
        BYTE      midivect;
        char      *pc;
        static char  fname[128];
        static DWORD  TmpBuff[1024];

    #ifdef DEBUG
        fd = fopen("SCOPE.DBG", "w");
    #endif

        /* make sure we got the right arg count, make pointers and midivect */
        if( argc < 3 )

```

-103-

```

        return;
        dioffset = (WORD) strtoul(argv[1], NULL, 16);
        dsegment = (WORD) strtoul(argv[2], NULL, 16);
        pdi = (DATA_IN *) (((DWORD) dsegment << 4) + dioffset);
        pdr = (DATA_RES *) (((DWORD) dsegment << 4) + pdi->DoOffset);
        phw = (HW_CONFIG *) (((DWORD) dsegment << 4) + pdi->HwOffset);

        midivect = (phw->MidIrq < 8 ? 0x08 : 0x68) + phw->MidIrq;
#ifdef DEBUG
        fprintf(fd, "\npointers ...\n");
        fprintf(fd, "P v86 non-res %08lx\n", pdi);
        fprintf(fd, "P v86 res %08lx\n", pdr);
        fprintf(fd, "P v86 HW %08lx\n", phw);
        fprintf(fd, "\nEMM context ...\n");
        fprintf(fd, "CR3 %08lx\n", pdi->CR3);
        fprintf(fd, "GDT %08lx %04x\n", pdi->GdtLaddr, pdi->GdtLimit);
        fprintf(fd, "IDT %08lx %04x\n", pdi->IdtLaddr, pdi->IdtLimit);
#endif

        /* setup the DOS4GW page table-zero-pointer */
        pd4g0 = (DWORD *) (GetCR3() & 0xfffff000UL);
        pd4g0 = (DWORD *) (*pd4g0 & 0xfffff000UL);

        /* setup laddr 0x180000 for EMM page dir, 0x181000 for var page tab ptr */
        *(pd4g0 + 0x0180) = (pdi->CR3 & 0xfffff000UL) | 0x67U;
        ppdir = (DWORD *) 0x180000UL;
        pptab = (DWORD volatile *) 0x181000UL;

        /* point pptab at EMM's page table for the GDT, create a ptr */
        *(pd4g0 + 0x0181) = *(ppdir + (pdi->GdtLaddr >> 22));
        FlushTLB();
        /* setup page table and pointer for EMM's GDT */
        *(pd4g0 + 0x0182) = *(pptab + ((pdi->GdtLaddr >> 12) & 0x000003ffUL)) |
0x67U;
        *(pd4g0 + 0x0183) = *(pd4g0 + 0x0182) + 0x1000U;
        pgdt = (DWORD *) (0x182000UL | (pdi->GdtLaddr & 0x00000fffUL));

        /* point pptab at EMM's page table for the IDT, create a ptr */
        *(pd4g0 + 0x0181) = *(ppdir + (pdi->IdtLaddr >> 22));
        FlushTLB();
        /* setup page table and pointer for EMM's IDT */
        *(pd4g0 + 0x0184) = *(pptab + ((pdi->IdtLaddr >> 12) & 0x000003ffUL)) |
0x67U;
        *(pd4g0 + 0x0185) = *(pd4g0 + 0x0184) + 0x1000U;
        pidt = (DWORD *) (0x184000UL | (pdi->IdtLaddr & 0x00000fffUL));

        /* open the code file in current .exe's directory */
        strcpy(fname, argv[0]);
        pc = fname;
        while( *pc++ );
        while( *--pc != '\\' );
        *++pc = '\0';
        strcat(fname, "VSCAPE32.BIN");
        if( !(fp = fopen(fname, "rb")) ) {
            printf("\007 error: could not open file \"%s\".\n", fname);
            goto exit;
        }

        /* get the DOS memory for the GetPMI call, setup far ptr */
        if( !(tmp = DosMalloc(5*1024UL)) ) {
            printf("\007 error: could not allocate DOS memory.\n");
            goto exit;
        }
        dmsel = (WORD) (tmp >> 16);
        dmseg = (WORD) tmp;
        * (DWORD *) &pdm = 0UL;
        * ((WORD *) &pdm + 2) = dmsel;

        /* get the first chunk of our file */
        fread(TmpBuff, 1, 1024, fp);

```

-104-

```

/* setup v32 config data pointer */
pv32 = (v32_CONFIG *) &TmpBuff;

/* make the Get PMI call, copy VCPI data into v32 config */
pv32->VcpiEntryOff = GetVcpi(dmseg);
for( i = 0; i < 6; ++i )
    pv32->VcpiGentries[i] = pdm->VcpiGentries[i];

/* setup the VIVO GDT entries in v32 and data-out mem */
pv32->VivoGentries[0] = pdr->VivoGentries[0] = pv32->VivoGentries[2] =
    pdr->VivoGentries[2] = (pdr->XmsPaddr << 16) | 0xffffU;
tmp = (pdr->XmsPaddr & 0xff000000UL) |
    ((pdr->XmsPaddr >> 16) & 0x000000ffUL) | 0x004f9300UL;
pv32->VivoGentries[1] = pdr->VivoGentries[1] = tmp | 0x00000800UL;
pv32->VivoGentries[3] = pdr->VivoGentries[3] = tmp;
pv32->VivoGentries[4] = pdr->VivoGentries[4] = 0x0000ffffUL;
pv32->VivoGentries[5] = pdr->VivoGentries[5] = 0x00cf9300UL;

/* fill out the rest of the V32 config memory */
pv32->SharedDataP = ((DWORD) dsegment << 4) + pdi->SharedOff;
pv32->MidiVectOff = (DWORD) (midivect - 2) << 3;
pv32->GetPmiOff = (DWORD) pdi->GetPmiOff;
pv32->FixupOff = (DWORD) pdi->FixupOff;
pv32->GetPmiSeg = pv32->FixupSeg = (DWORD) dsegment;
pv32->I67LinkOff = (*(pdt + (0x67U << 1) + 1) & 0xffff0000UL) |
    (*(pdt + (0x67U << 1)) & 0x0000ffffUL);
pv32->I67LinkSel = (WORD) (*(pdt + (0x67U << 1)) >> 16);
pv32->HardwareOptions = 1 << phw->BoardType;
pv32->BasePort = phw->BasePort;
pv32->WavePort = phw->WavePort;
pv32->SynthPort = phw->SynthPort;
pv32->WaveIrq = phw->WaveIrq;
pv32->MidiIrq = phw->MidiIrq;
pv32->DmaChan = phw->DmaChan;
pv32->ExtMidi = phw->ExtMidi & 0x7f;
if( phw->BoardType == 0x00 )
    pv32->SynthVolL = pv32->SynthVolR = phw->SynthVol & 0x7f;
else
    pv32->SynthVolL = pv32->SynthVolR = 0x7f;
#endif
    fprintf(fd, "\nV32 Data ... \n");
    fprintf(fd, "VIVO GDT 0 %08lx %08lx\n", pv32->VivoGentries[0], pv32->
>VivoGentries[1]);
    fprintf(fd, "VIVO GDT 1 %08lx %08lx\n", pv32->VivoGentries[2], pv32->
>VivoGentries[3]);
    fprintf(fd, "VIVO GDT 2 %08lx %08lx\n", pv32->VivoGentries[4], pv32->
>VivoGentries[5]);
    fprintf(fd, "VCPI GDT 0 %08lx %08lx\n", pv32->VcpiGentries[0], pv32->
>VcpiGentries[1]);
    fprintf(fd, "VCPI GDT 1 %08lx %08lx\n", pv32->VcpiGentries[2], pv32->
>VcpiGentries[3]);
    fprintf(fd, "VCPI GDT 2 %08lx %08lx\n", pv32->VcpiGentries[4], pv32->
>VcpiGentries[5]);
    fprintf(fd, "SharedDataP %08lx\n", pv32->SharedDataP);
    fprintf(fd, "MidiVectOff %08lx\n", pv32->MidiVectOff);
    fprintf(fd, "v86GetPMI %08lx %08lx\n", pv32->GetPmiSeg, pv32->GetPmiOff);
    fprintf(fd, "v86Fixup %08lx %08lx\n", pv32->FixupSeg, pv32->FixupOff);
    fprintf(fd, "INT67 Link %04x %08lx\n", pv32->I67LinkSel, pv32->I67LinkOff);
    fprintf(fd, "VCPI Entry %04x %08lx\n", pv32->VcpiEntrySel, pv32->
>VcpiEntryOff);
    fprintf(fd, "Hardware Opts %04x\n", pv32->HardwareOptions);
    fprintf(fd, "Ports %04x %04x %04x\n", pv32->BasePort, pv32->WavePort, pv32->
>SynthPort);
    fprintf(fd, "IRQS %02x %02x\n", pv32->WaveIrq, pv32->MidiIrq);
    fprintf(fd, "DMA %02x\n", pv32->DmaChan);
#endif

/* make entries in page table at 0x200000+ for our code, make pointer
*/

```

-105-

```

for ( i = 0, tmp = (pdr->XmsPaddr & 0xffff000UL) | 0x67;
    i < NUM_CODEPAGES + 1; ++i, tmp += 0x1000u)
    *(pd4g0 + 0x0200 + i) = tmp;
pxms = (DWORD *) (0x200000UL | (pdr->XmsPaddr & 0x00000fffUL));

/* copy first file chunk up to Extended Memory */
for( i = 0; i < 256; ++i )
    *pxms++ = TmpBuff[i];

/* now copy the rest of the code file up */
while( !feof(fp) ) {
    j = (fread(TmpBuff, 1, 1024, fp) + 3) >> 2;
    for( i = 0; i < j; ++i )
        *pxms++ = TmpBuff[i];
}

/* The next section will fill-in unused entries in the DOS4GW */
/* page table at lin-addr 0x180000+ and setup some pointers to allow */
/* us to access the page table, GDT, and IDT of the EMM. */

/* fill in the EMM's page-table-zero with our XMS entries */
*(pd4g0 + 0x0181) = *ppdir;
FlushTLB();
for( i = (WORD) (pdr->XmsPaddr >> 12), tmp = pdr->XmsPaddr | 0x67U;
    i < (WORD) (pdr->XmsPaddr >> 12) + 25; ++i, tmp += 0x1000U )
    *(pptab + i) = tmp;

/* find a GDT space to patch starting from top */
for( i = ((pdi->GdtLimit + 1) >> 2) - 2; i >= 2; i -= 2 )
    if( !(*(pgdt + i + 1)) )
        break;
if( i < 2 ) {
    printf("\007 error: could not install service vectors.\n");
    return;
}
i -= 4;

#ifdef DEBUG
    fprintf(fd, "\nBase Selector %04x\n", i << 2);
#endif

/* patch the GDT with our three service entries */
*(pgdt + i) = *(pgdt + i + 2) = pdr->VivoGentries[0];
*(pgdt + i + 1) = pdr->VivoGentries[1];
*(pgdt + i + 3) = pdr->VivoGentries[3];
*(pgdt + i + 4) = pdr->VivoGentries[4];
*(pgdt + i + 5) = pdr->VivoGentries[5];

/* initialize some hardware ... */
inp(phw->BasePort + 0x08); // NMI clr
outp(phw->BasePort + 0x02, 0x03); // UART reset
outp(phw->BasePort + 0x02, 0x00);
outp(phw->BasePort + 0x06, 0x00); // no Otto ints yet
outp(phw->BasePort + 0x08, 0xfe);
outp(phw->BasePort + 0x09, 0xaa);
outp(phw->BasePort + 0x0a, 0x08);
outp(phw->BasePort + 0x04, 0x03);
outp(phw->BasePort + 0x05, 0x80 | (phw->DmaChan << 4));
outp(phw->BasePort + 0x04, 0x04);
outp(phw->BasePort + 0x05,
    (phw->WaveIrq == 9 ? 0x00 : phw->WaveIrq == 5 ? 0x04 : 0x08) |
    (phw->MidiIrq == 9 ? 0x00 : phw->MidiIrq == 7 ? 0x02 : 0x03));
outp(phw->BasePort + 0x04, 0x06);
outp(phw->BasePort + 0x05, 0x00);

outp(phw->WavePort, 0x0c);
outp(phw->WavePort + 1, 0x50);
outp(phw->WavePort, 0x49);
outp(phw->WavePort + 1, 0x04);
outp(phw->WavePort, 0x48);
outp(phw->WavePort + 1, 0x00);

```

-106-

```

    outp(phw->WavePort, 0x0a);
    outp(phw->WavePort + 1, 0x80);
    outp(phw->WavePort, 0x1b);
    outp(phw->WavePort + 1, 0x08);
    outp(phw->WavePort, 0x10);
    outp(phw->WavePort + 1, 0x80);
    outp(phw->WavePort, 0x11);
    outp(phw->WavePort + 1, 0xc0);
    outp(phw->WavePort, 0x00);
    outp(phw->WavePort + 1, 0x8c);
    outp(phw->WavePort, 0x01);
    outp(phw->WavePort + 1, 0x8c);
    outp(phw->WavePort, 0x06);
    outp(phw->WavePort + 1, (phw->WaveVol ^ 0x7f) >> 1);
    outp(phw->WavePort, 0x07);
    outp(phw->WavePort + 1, (phw->WaveVol ^ 0x7f) >> 1);
    outp(phw->WavePort, 0x02);
    outp(phw->WavePort + 1, (phw->CdAuxVol ^ 0x7f) >> 2);
    outp(phw->WavePort, 0x03);
    outp(phw->WavePort + 1, (phw->CdAuxVol ^ 0x7f) >> 2);

    /* now create the IDT entries for our NMI, MIDI, DOS and Int67 services */
    ClrI();
    tmp = (DWORD) i << 18;
    *(pidd + (0x02U << 1)) = tmp;
    *(pidd + (0x02U << 1) + 1) = 0x00008e00UL;
    *(pidd + ((WORD) midivect << 1)) = tmp | 0x0004U;
    *(pidd + ((WORD) midivect << 1) + 1) = 0x00008e00UL;
    *(pidd + (0x67U << 1)) = tmp | 0x000cU;
    *(pidd + (0x67U << 1) + 1) = 0x0000ee00UL;
    SetI();

#ifdef DEBUG
    fprintf(fd, "\nv86 Resident Data ...\n");
    fprintf(fd, "VIVO GDT 0 %08lx %08lx\n", pdr->VivoGentries[0], pdr->VivoGentries[0]);
    fprintf(fd, "VIVO GDT 1 %08lx %08lx\n", pdr->VivoGentries[2], pdr->VivoGentries[1]);
    fprintf(fd, "VIVO GDT 2 %08lx %08lx\n", pdr->VivoGentries[4], pdr->VivoGentries[2]);
    fprintf(fd, "XMS Paddr %08lx\n", pdr->XmsPaddr);
    fprintf(fd, "Num Code Pages %04x\n", pdr->NumCodePages);
#endif
    /* fill-out the rest of the resident data struct */
    pdr->NumCodePages = NUM_CODEPAGES;
exit:
    if( dmsel )
        DosFree(dmsel);
    if( fp )
        fclose(fp);
#ifdef DEBUG
    fclose(fd);
#endif
    return;
}

/* This function invokes the DEPMI INT-31h call for allocating DOS memory. */
DWORD DosMalloc(DWORD size) {
    union REGS  r;

    r.w.bx = (WORD) ((size + 15) >> 4);
    r.w.ax = 0x0100;
    int386(0x31, &r, &r);

    if( r.w.cflag )
        return 0UL;

```

-107-

```

        return (r.x.edx << 16) | r.w.ax;
    }

```

```

/* This function invokes the DPMI INT-31h call for freeing DOS memory. */

```

```

void DosFree(WORD selector) {

```

```

    union REGS    r;

    r.w.dx = selector;
    r.w.ax = 0x0101;
    int386(0x31, &r, &r);

    return;
}

```

```

/* This function invokes the DOS-mode VCPI INT-67h call for acquiring the */
/* protected-mode interface. */

```

```

DWORD GetVcpi(WORD dmseg) {

```

```

    union REGS    r;
    struct SREGS  s;
    static struct {
        DWORD     edi;
        DWORD     esi;
        DWORD     ebp;
        DWORD     zero;
        DWORD     ebx;
        DWORD     edx;
        DWORD     ecx;
        DWORD     eax;
        WORD       flags;
        WORD       es;
        WORD       ds;
        WORD       fs;
        WORD       gs;
        WORD       ip;
        WORD       cs;
        WORD       sp;
        WORD       ss;
    } RmRegs = { 0UL, 0x1000UL, 0UL, 0UL, 0UL, 0UL, 0UL, 0x0000de01UL,
        0x3000, 0U, 0U, 0U, 0U, 0U, 0U, 0x1400U, 0U};

    RmRegs.ds = dmseg;
    RmRegs.es = dmseg;
    RmRegs.ss = dmseg;

    segread(&s);
    r.w.ax = 0x0300;
    r.w.bx = 0x0067;
    r.w.cx = 0;
    r.x.edi = (DWORD) &RmRegs;
    s.es = s.ds;
    int386x(0x31, &r, &r, &s);

    return RmRegs.ebx;
}

```



What is claimed:

1. A method of providing device virtualization to an application running under a DOS extender within a protected-mode context created for said DOS extender within  
5 in a DOS-based operating system environment of a processor at run-time, said protected-mode context created for said DOS extender including an interrupt descriptor table for said DOS extender (DOS extender IDT), comprising the steps of:  
10 storing device emulation code at a predetermined address in a memory accessible to said processor;  
detecting a request from said DOS extender to switch to protected-mode;  
upon detection of said request by said DOS  
15 extender, patching said DOS extender IDT, at run-time, to include a vector to said device emulation code for a predetermined interrupt; and  
when said processor detects said predetermined interrupt during execution of said application, said  
20 processor referencing said vector to said device emulation code patched into said DOS extender IDT.
2. The method of claim 1, wherein said predetermined address is in extended memory addressable by said processor, and said storing step comprises the step of  
25 storing said device emulation code at said predetermined address at boot-time.
3. The method of claim 1, wherein said DOS-based operating system environment includes a virtual control program interface (VCPI) through which said DOS extender  
30 acquires said protected-mode context, said detecting step comprising the steps of:  
intercepting communications between said DOS extender and said VCPI during said execution of said application; and

detecting startup of said DOS extender when a communication from said DOS extender to said VCPI is said request to switch to protected-mode.

4. The method of claim 1, wherein said step of  
5 patching said DOS extender IDT includes the steps of:

intercepting said request to said VCPI to switch to protected-mode, said request including a page directory of said DOS extender;

switching a page directory of a protected-mode  
10 context of said processor to said page directory of said DOS extender;

accessing said DOS extender IDT and searching for said vector to said device emulation code;

if said DOS extender IDT does not include said  
15 vector to said device emulation code, searching a global descriptor table of said DOS extender (DOS extender GDT) to determine what selector value corresponds to said device emulation code and then entering said selector value for said device emulation code into said DOS extender IDT;

20 switching said page directory back to said page directory of said protected mode context of said processor; and

jumping to said VCPI to execute said request to switch to protected-mode.

25 5. The method of claim 1, wherein said predetermined interrupt is a non-maskable interrupt which is generated when said application attempts to address a predetermined address related to the device to be emulated.

6. A system which provides device virtualization  
30 to an application running under a DOS extender in a DOS-based operating system environment of a processor, said DOS extender executing within a protected-mode context created for said DOS extender within said DOS-based operating system environment of said processor at run-time, said protected-



mode context created for said DOS extender including an interrupt descriptor table for said DOS extender (DOS extender IDT), said system comprising:

- device emulation code stored at a predetermined  
5 address in a memory accessible to said processor;
- a detection program which detects a request from said DOS extender to switch to protected-mode; and
- a driver which operates in said protected-mode context of said DOS extender and which, upon detection by  
10 said detection program of said request from said DOS extender to switch to protected-mode, patches said DOS extender IDT, at run-time, to include a vector to said device emulation code for a predetermined interrupt, whereby, when said processor detects said predetermined  
15 interrupt during execution of said application, said processor references said vector to said device emulation code patched into said DOS extender IDT by said driver.

7. The system of claim 6, wherein said predetermined address is in extended memory addressable by  
20 said processor, and said device emulation code is stored at said predetermined address at boot-time.

8. The system of claim 6, wherein said DOS-based operating system environment includes a virtual control program interface (VCPI) through which said DOS extender  
25 acquires said protected-mode context, and said detection program is a terminate-and-stay-resident (TSR) program which intercepts communications between said DOS extender and said VCPI during said execution of said application, said detection program detecting startup of said DOS extender  
30 when a communication from said DOS extender to said VCPI is said request to switch to protected-mode.

9. The system of claim 8, wherein said driver installs its interrupt vectors into the DOS extender IDT upon detection of said request to switch to protected-mode




\* C L M S \*

from said DOS extender to said VCPI, said interrupt vectors including said vector to said device emulation code for said predetermined interrupt, thereby making said device emulation code available to said DOS extender and said application in said protected-mode context of said DOS extender.


10. The system of claim 8, wherein said DOS extender sends said request to switch to protected-mode to said VCPI at system startup and again during execution of said application running under said DOS extender, said request including at least the following parameters: physical address of a Page Directory and a linear address and size of the DOS extender IDT and a global descriptor table of said DOS extender.

11. The system of claim 6, wherein said predetermined interrupt is a non-maskable interrupt which is generated when said application attempts to address a predetermined address related to the device to be emulated.

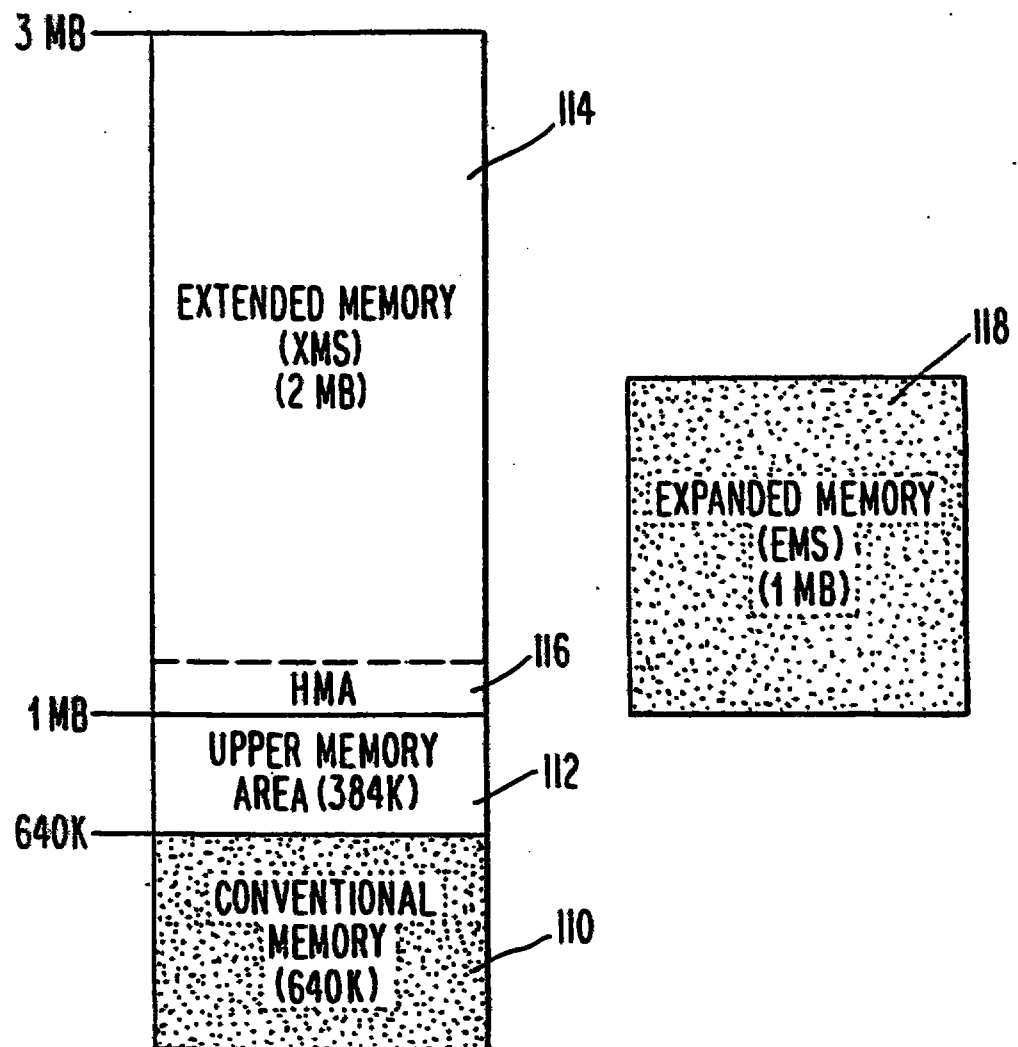


***Fig. 1***

(PRIOR ART)

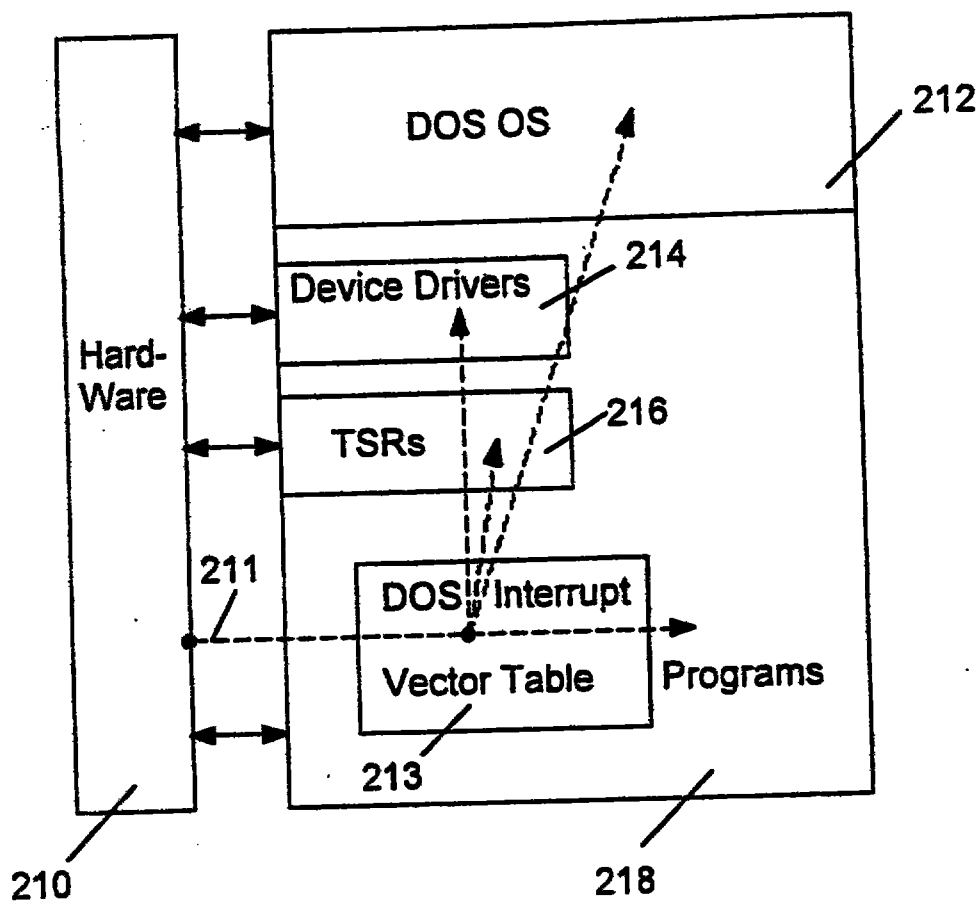

**FIGURE 2**  
(PRIOR ART)

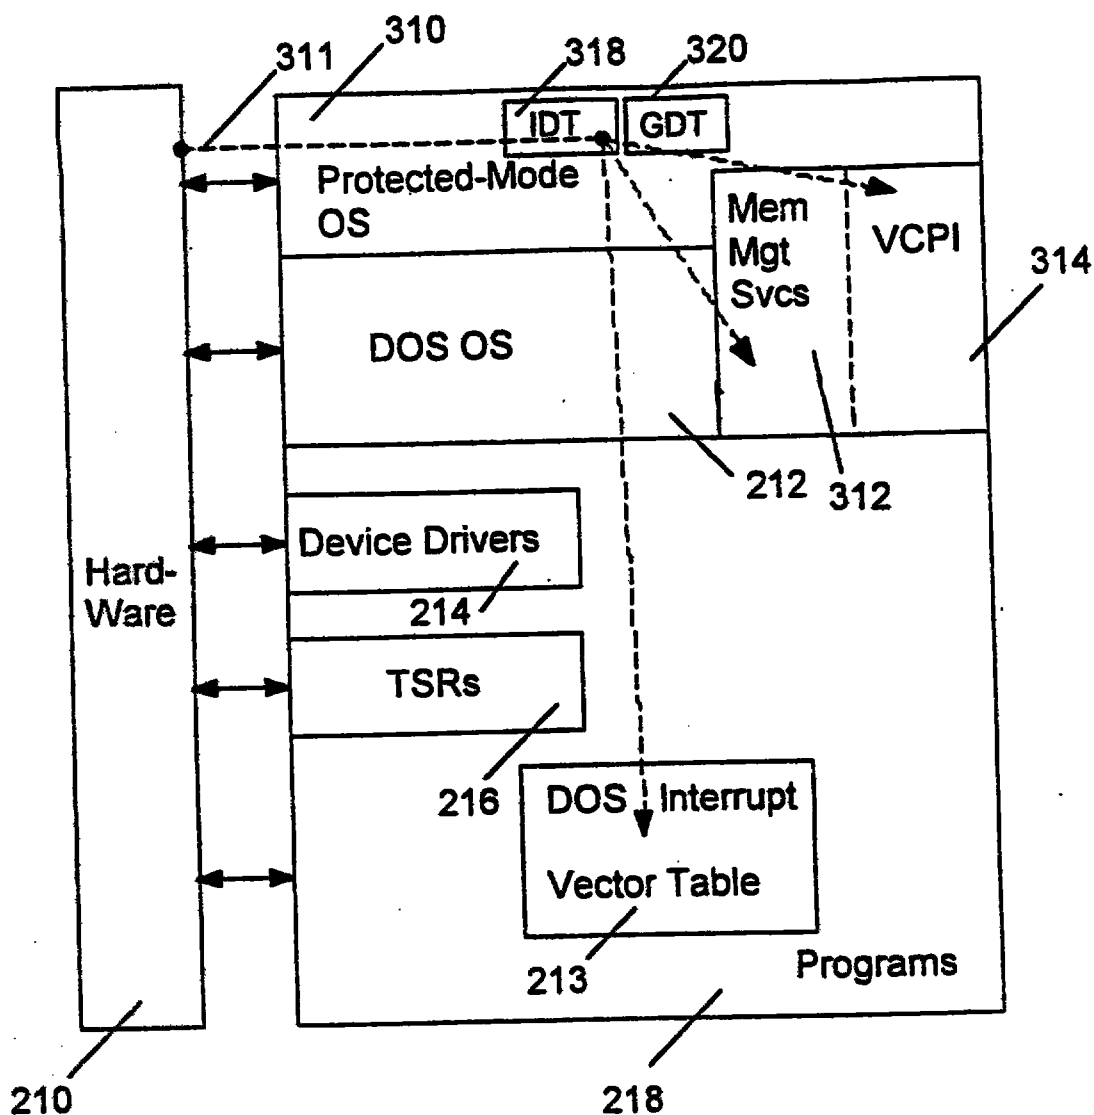**FIGURE 3**

(PRIOR ART)

4/8

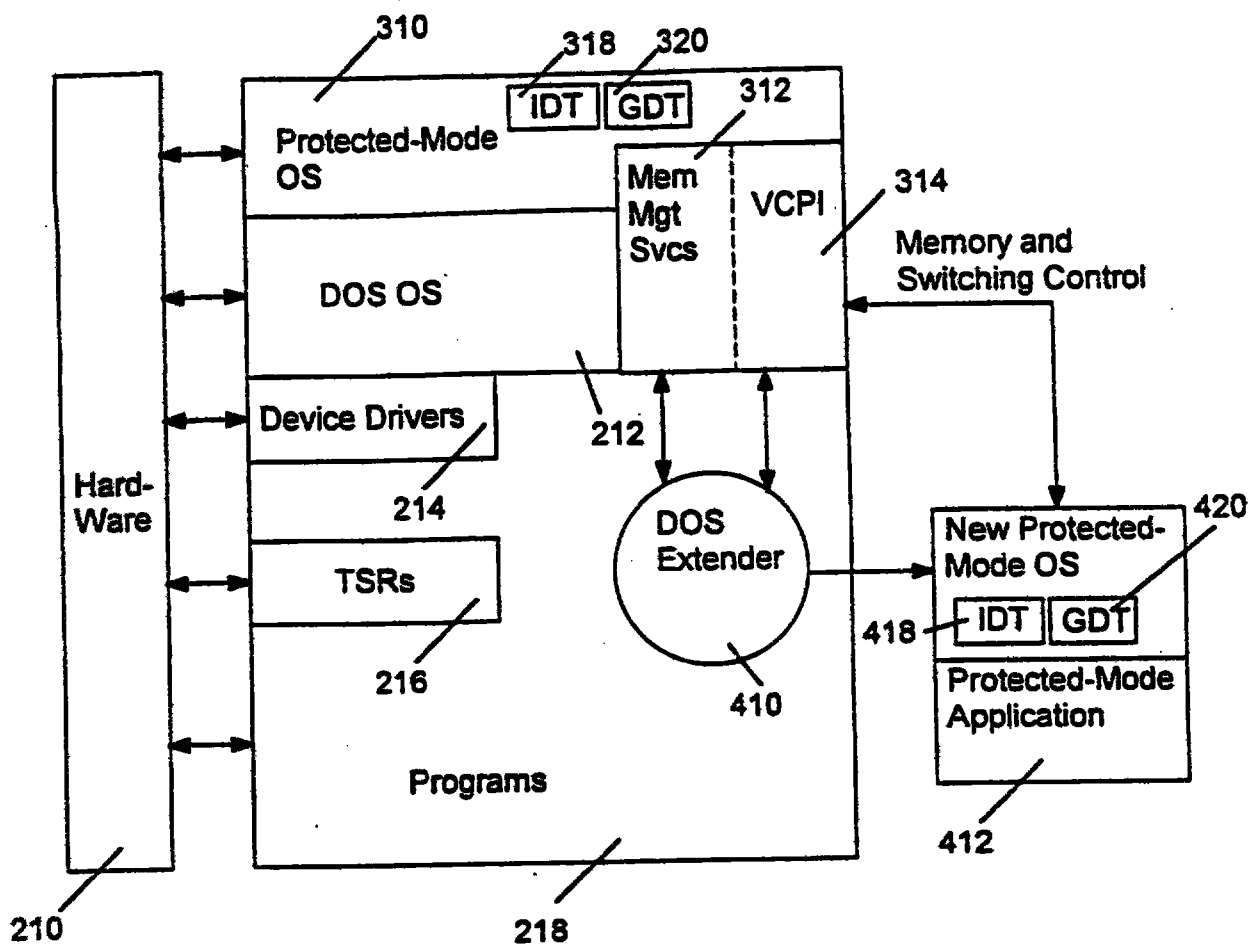


FIGURE 4  
(PRIOR ART)

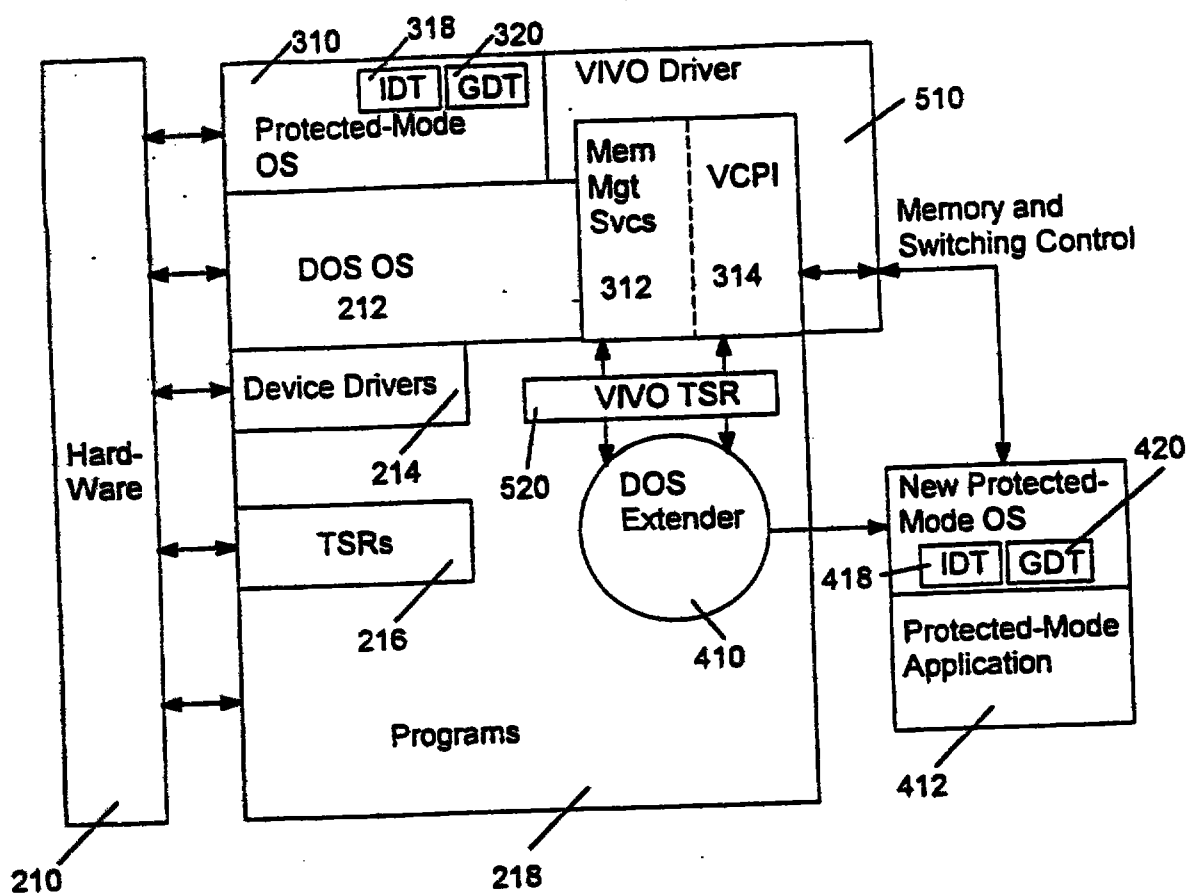


FIGURE 5

6/8

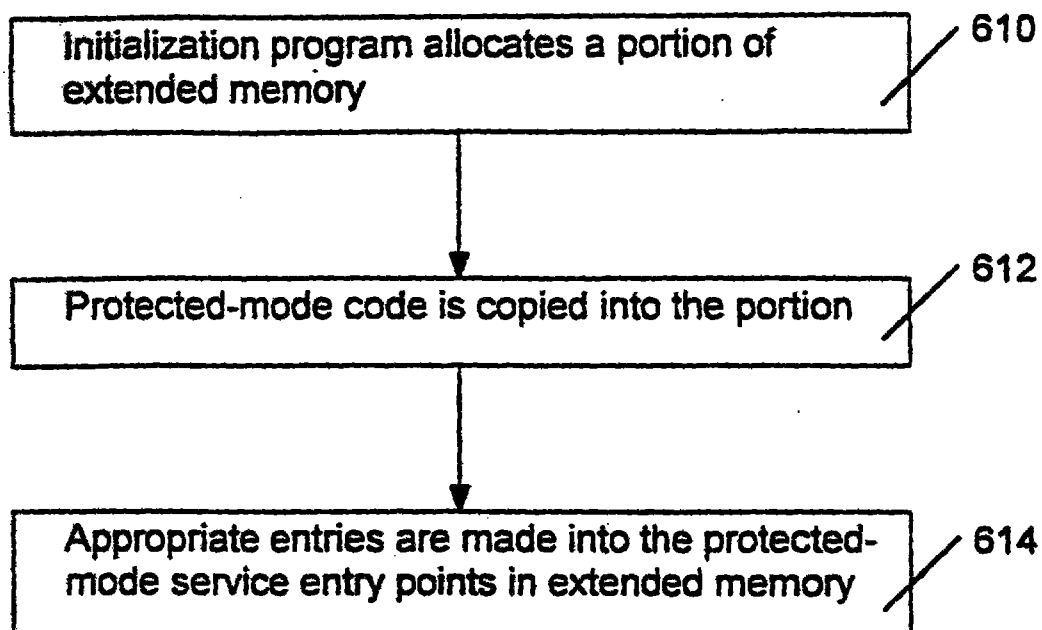


FIGURE 6

7/8

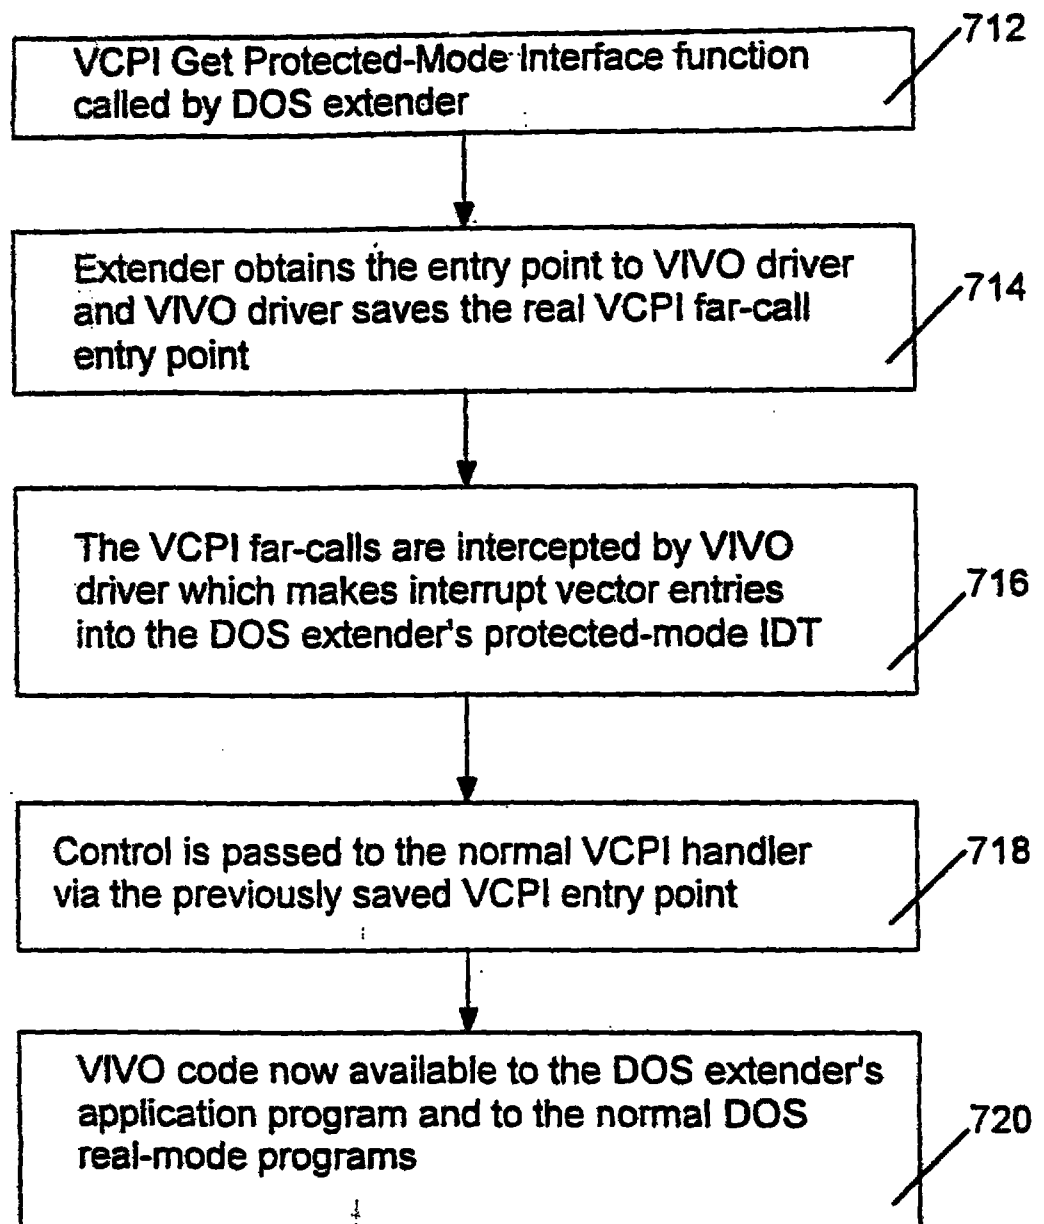


FIGURE 7

8/8

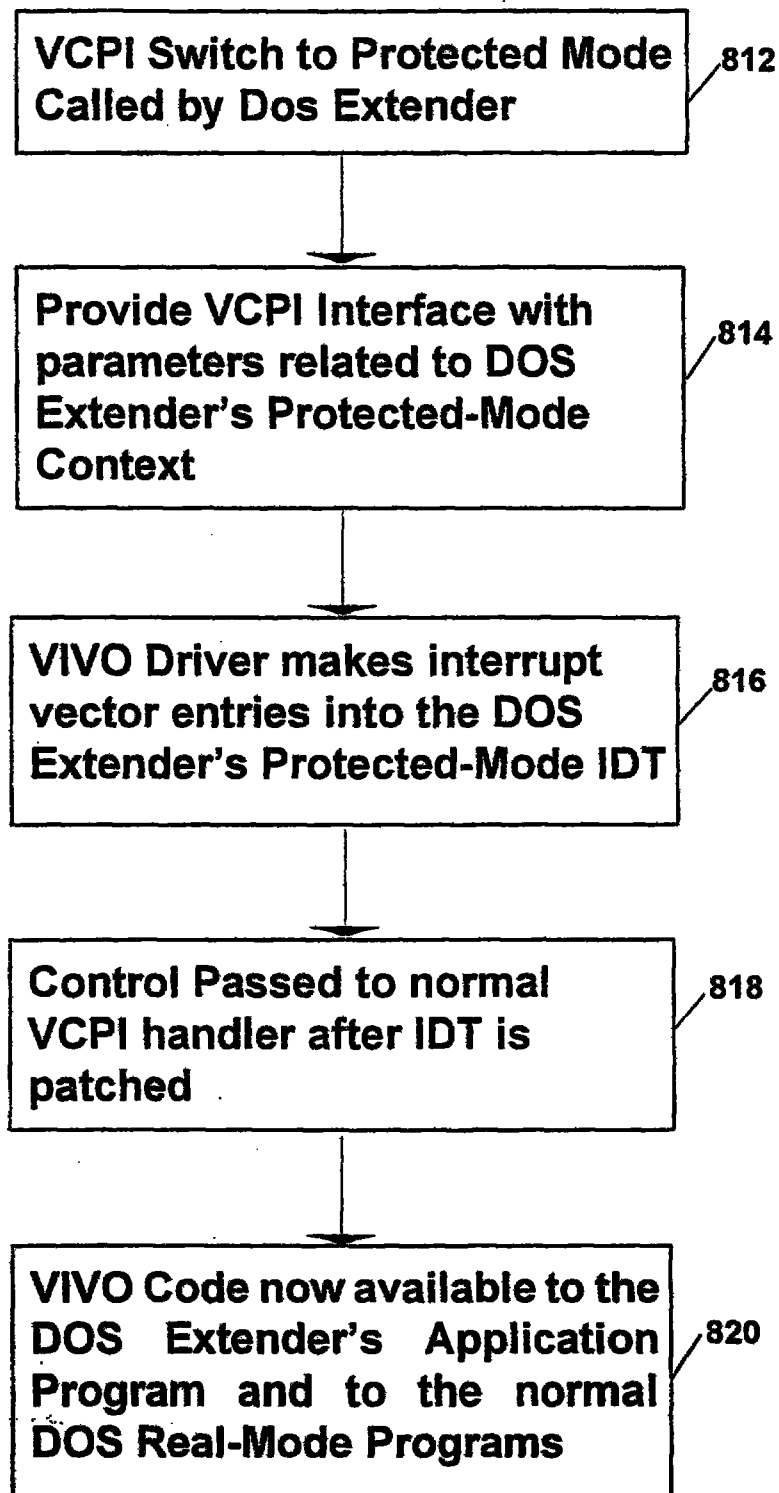



FIGURE 8



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| (51) International Patent Classification <sup>6</sup> :<br><b>G06F 12/08, 9/30</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>A1</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | (11) International Publication Number: <b>WO 99/30241</b><br>(43) International Publication Date: <b>17 June 1999 (17.06.99)</b> |
| <p>(21) International Application Number: <b>PCT/US98/26072</b></p> <p>(22) International Filing Date: <b>9 December 1998 (09.12.98)</b></p> <p>(30) Priority Data:<br/><b>08/988,913</b>      <b>11 December 1997 (11.12.97)</b>      <b>US</b></p> <p>(71) Applicant (for all designated States except US): <b>ENSONIQ CORPORATION [US/US]; 155 Great Valley Parkway, Malvern, PA 19355 (US).</b></p> <p>(72) Inventors; and<br/>(75) Inventors/Applicants (for US only): <b>WEIR, Andrew, P. [US/US]; 1800 Pulaski Drive, Blue Bell, PA 19422 (US). FRIEL, Joseph, T. [US/US]; 109 Rockland Road, Havertown, PA 19083 (US).</b></p> <p>(74) Agents: <b>ROCCI, Steven, J. et al.; Woodcock Washburn Kurtz Mackiewicz &amp; Norris LLP, 46th floor, One Liberty Place, Philadelphia, PA 19103 (US).</b></p> | <p>(81) Designated States: <b>AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</b></p> <p><b>Published</b><br/><i>With international search report.<br/>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> |                                                                                                                                  |

(54) Title: **A METHOD AND SYSTEM FOR DEVICE VIRTUALIZATION BASED ON AN INTERRUPT REQUEST IN A DOS-BASED ENVIRONMENT**

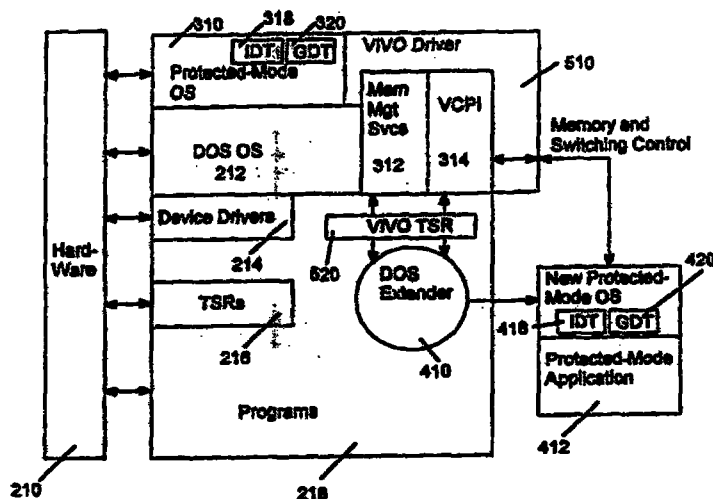

## (57) Abstract

A technique for providing device virtualization in an MS-DOS based operating environment, using an interrupt request (e.g., a non-maskable interrupt), is described. The technique includes executing an application on a processor within the MS-DOS based operating environment and, when the application attempts to address the device to be emulated, causing a processor interrupt to occur. In response to the interrupt, the processor executes code representing the virtualization of a device. The code for servicing the interrupt and emulating the device are written in protected-mode code (310), stored in the extended memory area (510), and made available by making appropriate entries into the interrupt descriptor tables (IDTs) (310, 318) for the protected-mode contexts which exist for the native protected-mode operating systems and for the DOS extender (410). The entries made into the IDT for the protected-mode context established for the DOS extender are accomplished by intercepting communications between the DOS extender and the virtual control program interface (VCPI) and patching the DOS extender's IDT with the vectors to the stored emulation code.