

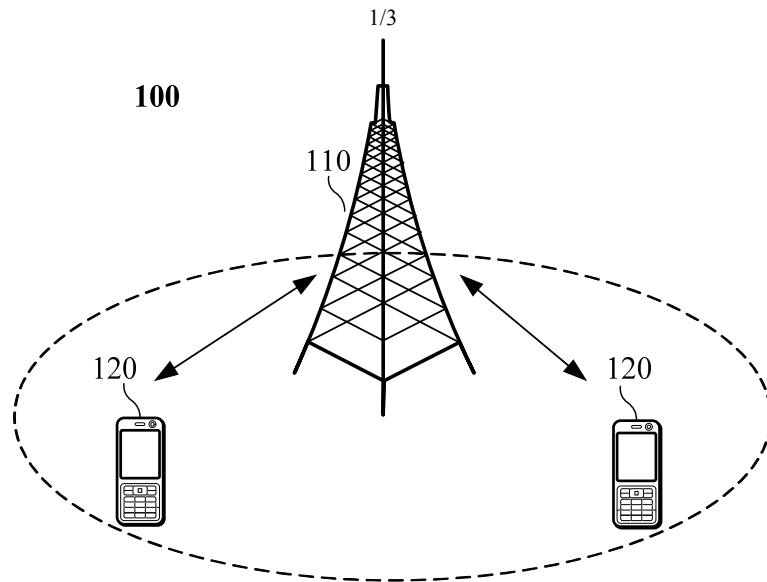


FIG. 1

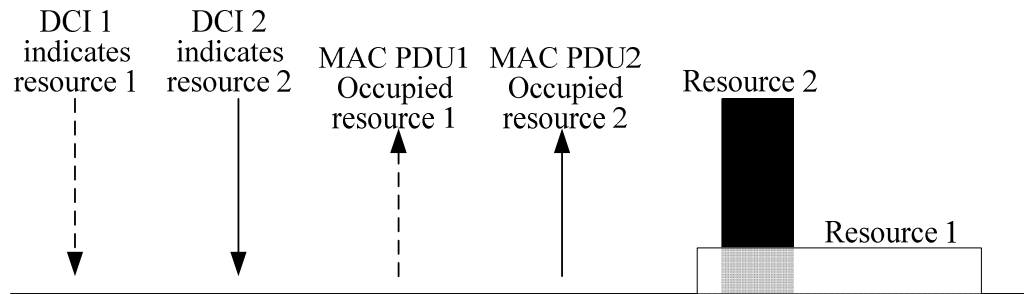


FIG. 2

200

If there is an untransmitted first MAC PDU in a target HARQ process, send a third MAC PDU to a physical layer at an MAC layer, wherein a first resource corresponding to the first MAC PDU overlaps with a second resource corresponding to a second MAC PDU, the third MAC PDU includes data in the first MAC PDU, and the physical layer is used for transmitting the third MAC PDU through a third resource

S210

FIG. 3

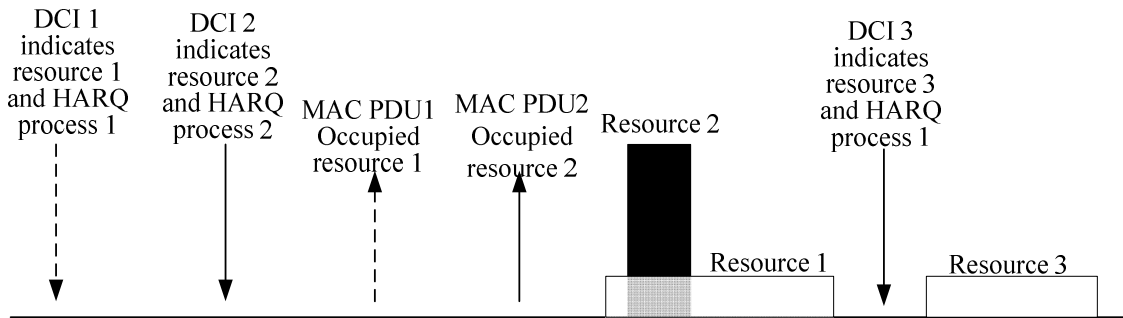


FIG. 4

300

If there is an untransmitted first MAC PDU in a target HARQ process, send a third MAC PDU to a physical layer at an MAC layer, wherein the physical layer is used for transmitting the third MAC PDU through a third resource, wherein a first resource corresponding to the first MAC PDU overlaps with a second resource corresponding to a second MAC PDU, a configured grant timer corresponding to the target HARQ process is running, and the third MAC PDU does not include data in the first MAC PDU

S310

FIG. 5

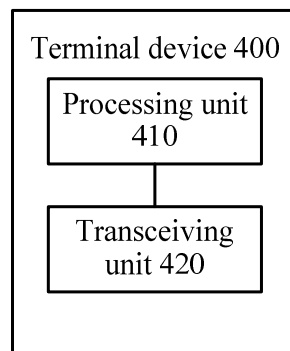


FIG. 6

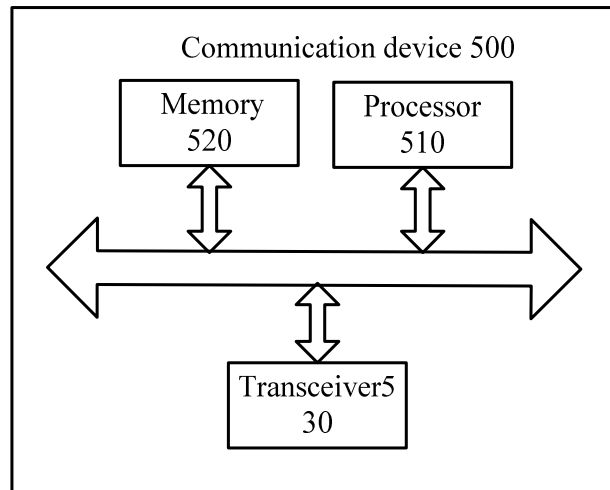


FIG. 7

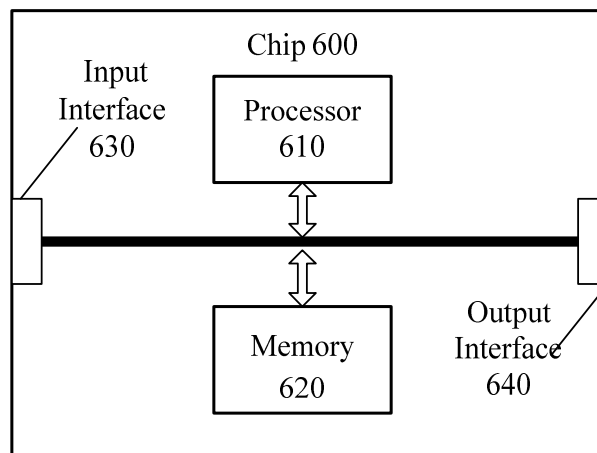


FIG. 8

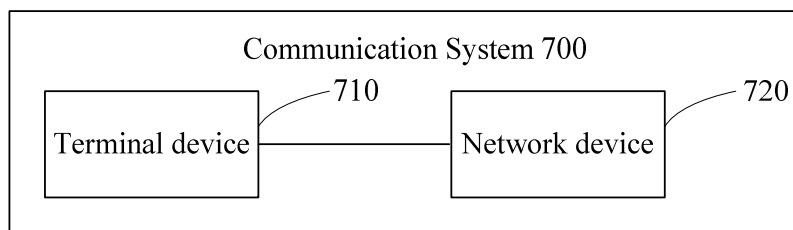


FIG. 9